General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.

- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.

- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.

- This document is paginated as submitted by the original source.

- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.
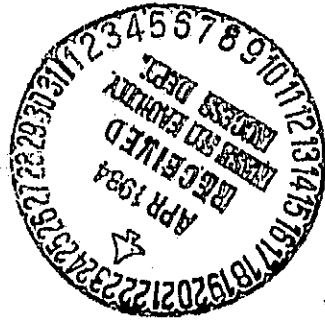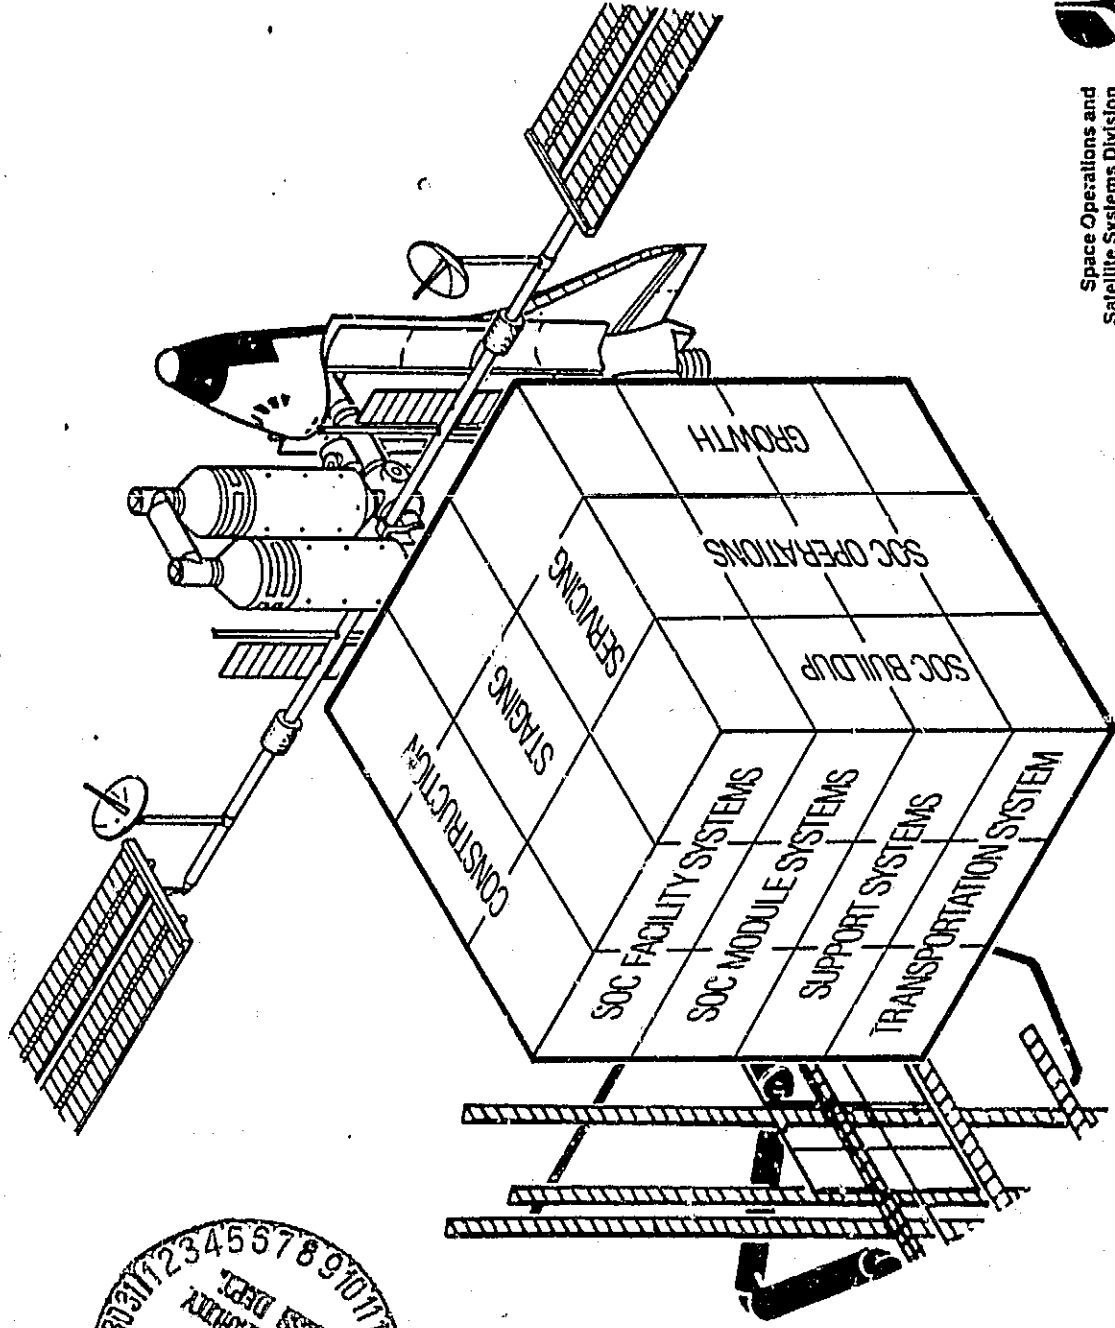
SPACE OPERATIONS CENTER—SHUTTLE INTERACTION STUDY

FIRST QUARTERLY REVIEW

CONSTRUCTION

STAGING

SERVICING

SOC BUILDUP

SOC OPERATIONS

GROWTH

SOC FACILITY SYSTEMS

SOC MODULE SYSTEMS

SUPPORT SYSTEMS

TRANSPORTATION SYSTEM

Rockwell International

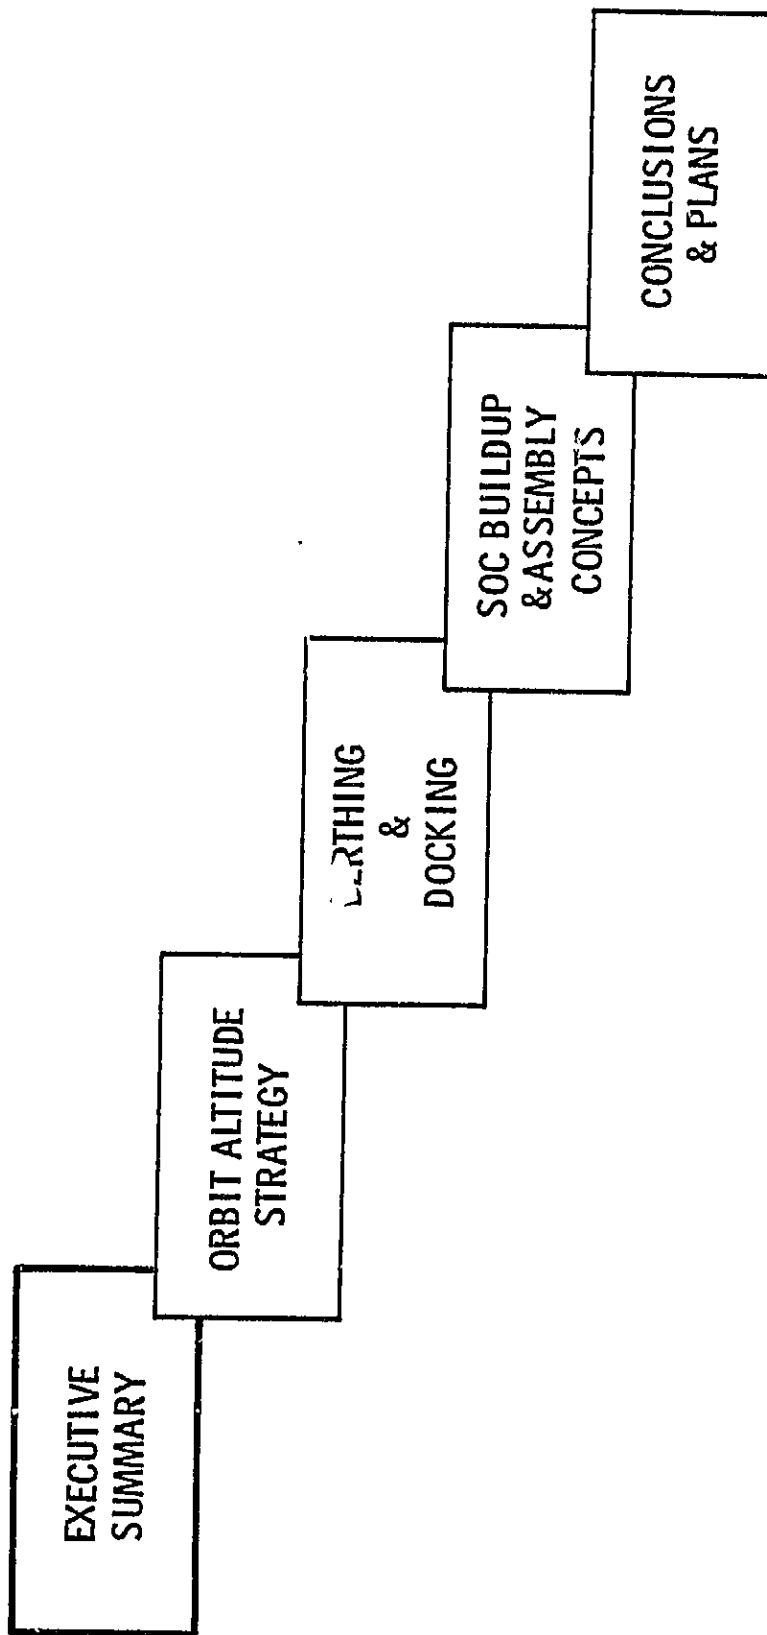Space Operations and
Satellite Systems Division

FOREWARD

This briefing package contains the material presented at the first quarterly
review of the SOC - Shuttle Interaction Study. This study is being performed
under NASA contract NAS9-16153 and is conducted under the technical direction of
the Contracting Officer's Representative (COR), Samuel H. Nassif, Systems Design,
Johnson Space Center.

These materials cover the first three study tasks. Written discussions
accompany a number of the charts where deemed appropriate because of complex
subject matter.

BRIEFING OUTLINE

EXECUTIVE SUMMARY

ORBIT ALTITUDE STRATEGY

BERTHING & DOCKING

SOC BUILDUP & ASSEMBLY CONCEPTS

CONCLUSIONS & PLANS

Space Operations and
Satellite Systems Division

Rockwell International
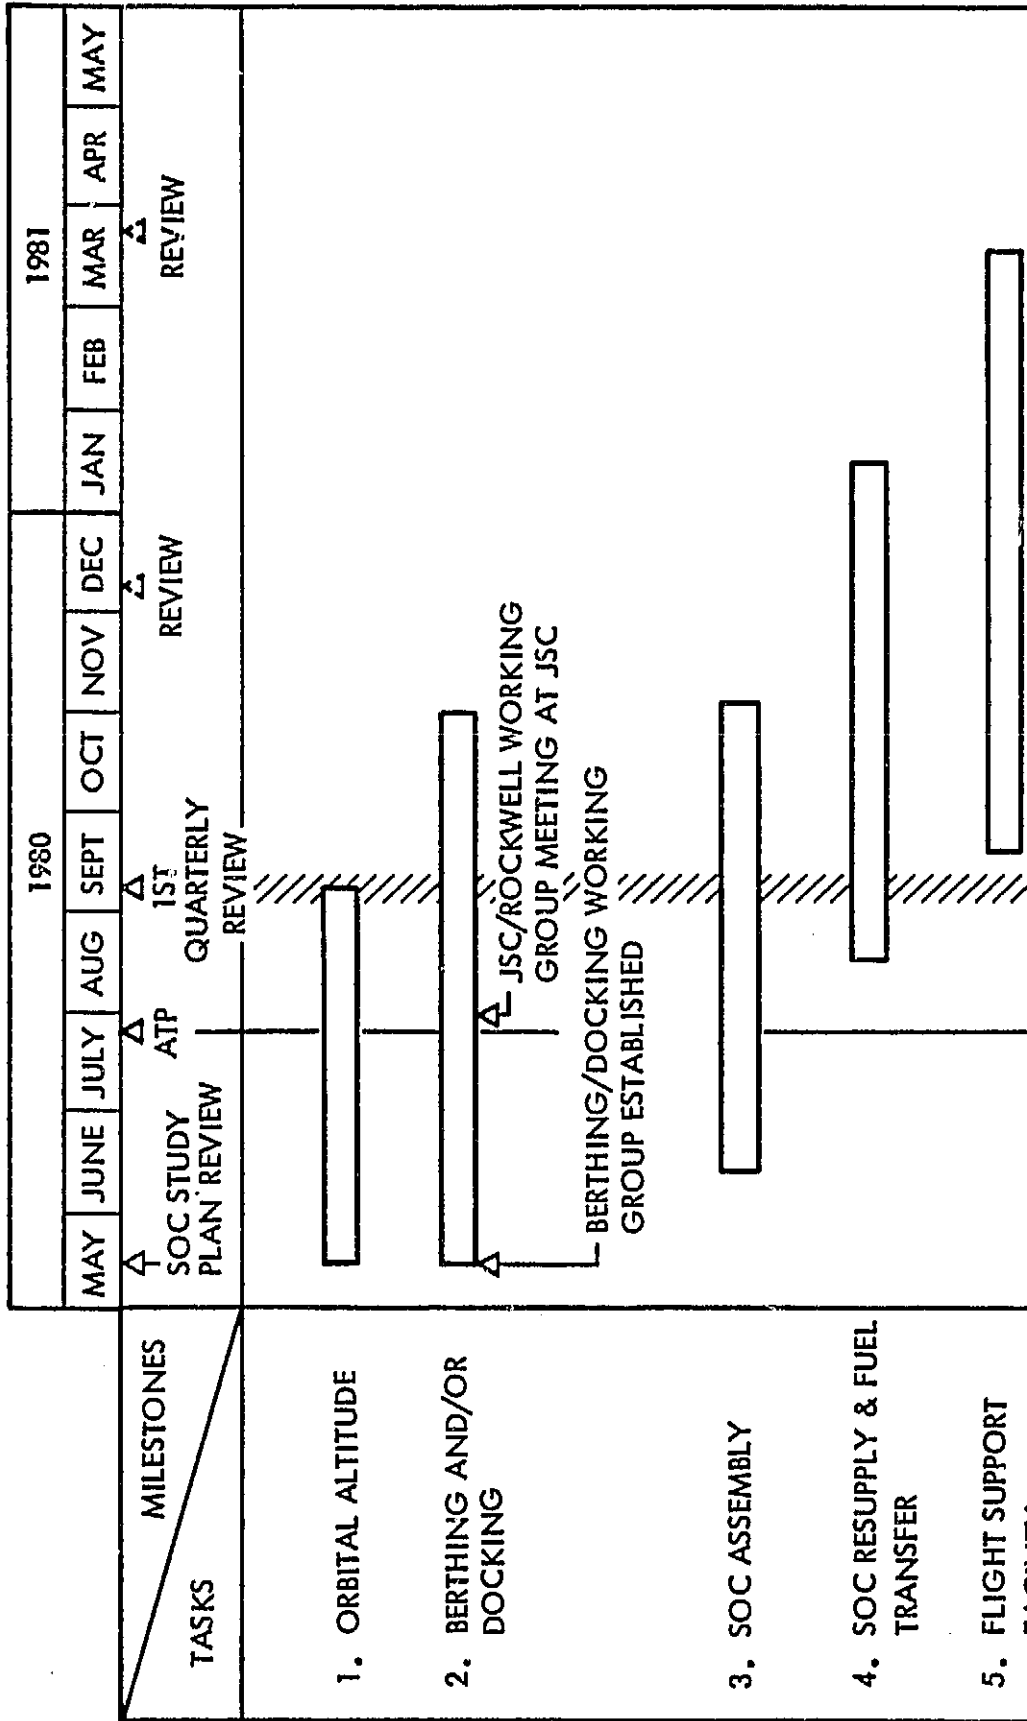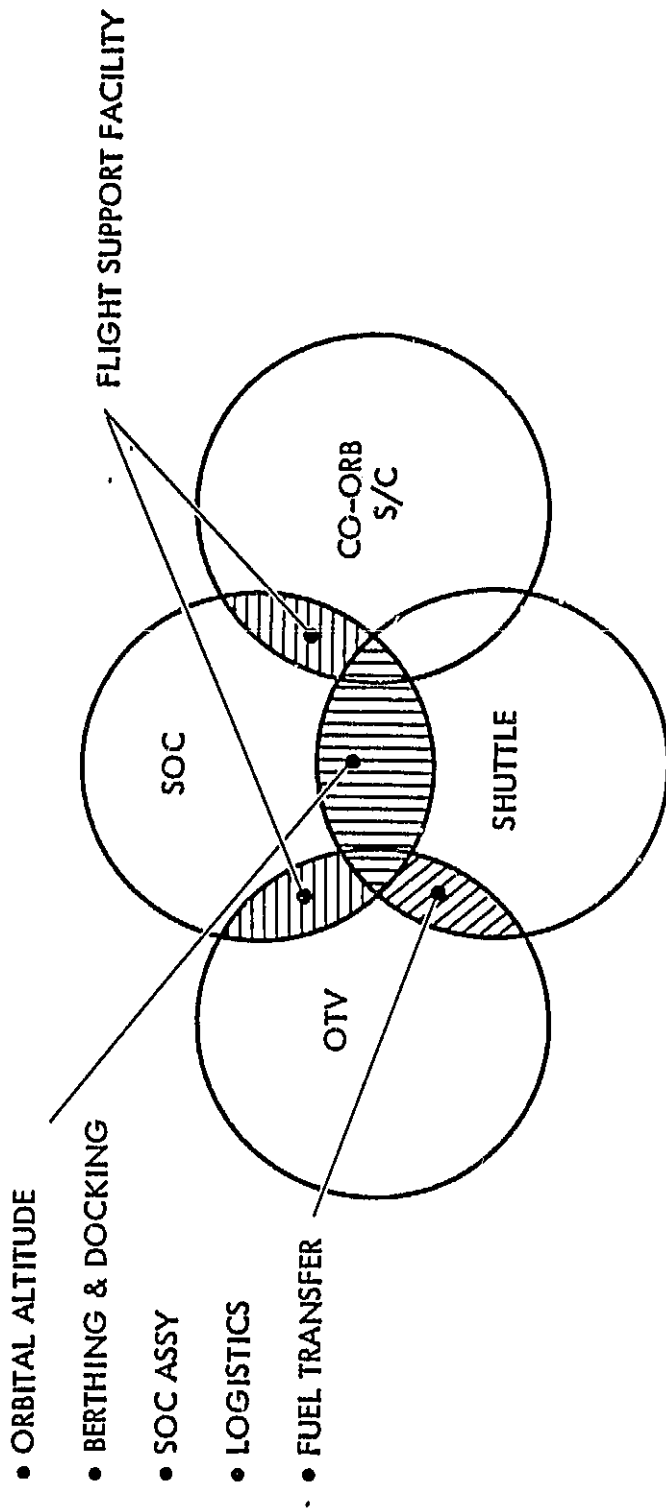
1

80SSD10834

STUDY OBJECTIVE *

"ANALYZE, IN A PRELIMINARY FASHION, THE IMPLICATION

OF USING THE SHUTTLE WITH THE SOC, INCLUDING CONSTRAINTS

THAT THE SHUTTLE WILL PLACE UPON THE SOC DESIGN. IDENTIFY

ALL THE CONSIDERATIONS INVOLVED IN THE USE OF THE

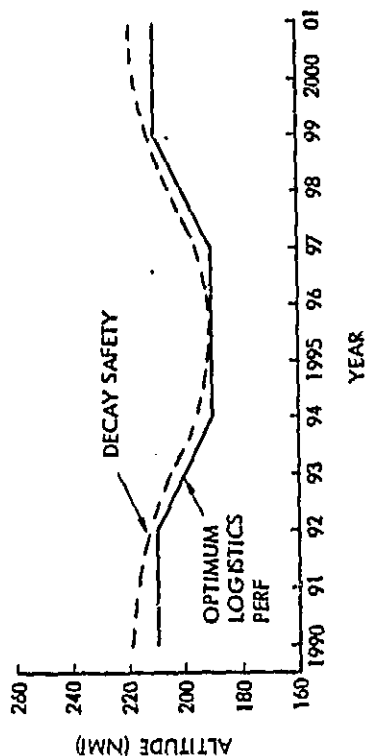SHUTTLE AS A PART OF THE SOC CONCEPT."

* SOW, NAS9-16153 CONTRACT

Space Operations and
Satellite Systems Division

Rockwell
International

2

80SSD10828

STUDY ACTIVITY SCHEDULE

TASKS	MILESTONES	1980								1981				
		MAY	JUNE	JULY	AUG	SEPT	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY

Milestones:
- SOC STUDY PLAN REVIEW
- ATP
- 1ST QUARTERLY REVIEW
- REVIEW
- REVIEW
- JSC/ROCKWELL WORKING GROUP MEETING AT JSC
- BERTHING/DOCKING WORKING GROUP ESTABLISHED

Tasks:
1. ORBITAL ALTITUDE
2. BERTHING AND/OR DOCKING
3. SOC ASSEMBLY
4. SOC RESUPPLY & FUEL TRANSFER
5. FLIGHT SUPPORT

STUDY ISSUES

- ORBITAL ALTITUDE
- BERTHING & DOCKING
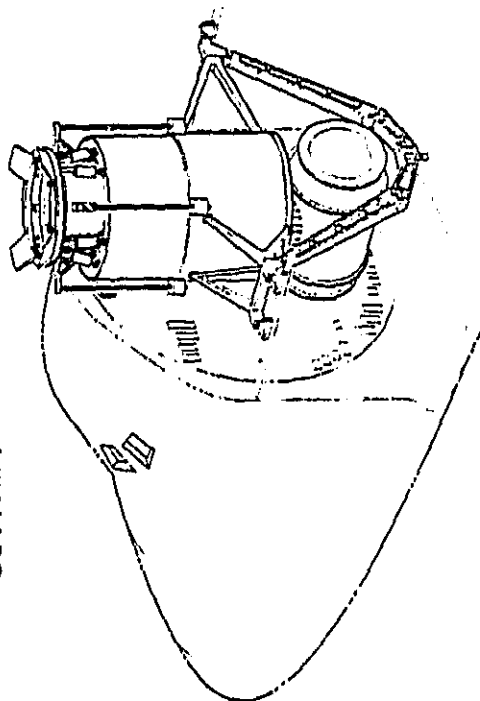- SOC ASSY
- LOGISTICS
- FUEL TRANSFER

IMPACT CRITERIA:

- SOC CONFIGURATION
- PERFORMANCE/OPS CAPABILITY OF SOC
- MODS TO SHUTTLE
- SHUTTLE FLEET UTILIZATION
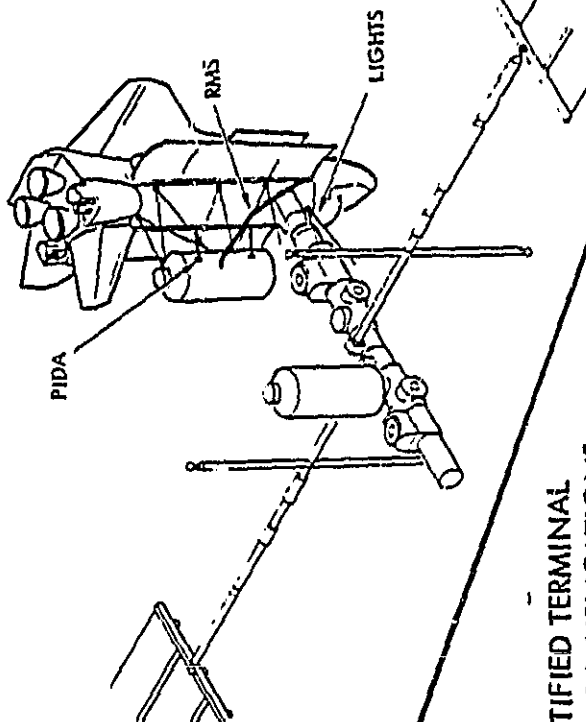- TECHNOLOGY REQUIREMENTS
- MOTV REQUIREMENTS

FLIGHT SUPPORT FACILITY

SOC

CO-ORB S/C

SHUTTLE

OTV

ACCOMPLISHMENTS

- IDENTIFIED SOC ASSEMBLY IMPLICATIONS

RMS

LIGHTS

PIDA

- ESTABLISHED AN ORBIT ALTITUDE STRATEGY

DECAY SAFETY

OPTIMUM
LOGISTICS
PERF

ALTITUDE (NM)

280
240
220
200
180
160

1990 91 92 93 94 1995 96 97 98 99 2000 01

YEAR

- IDENTIFIED TERMINAL
CLOSURE IMPLICATIONS

MISS DISTANCE
20.6 INCHES

- ESTABLISHED A DOCKING MODULE
CONCEPT

80SSD10850

Rockwell
International

Space Operations and
Satellite Systems Division

5

SOC ORBIT ALTITUDE

USE VARIABLE ALTITUDE STRATEGY

FLY HIGH ALT
- LO TRAFFIC
- HI ATMOS DENSITY

FLY LOW ALT
- HI TRAFFIC
- LOW ATMOS DENSITY

SAVES LOGISTICS COSTS

1990   YR   2000

h

DIRECT SHUTTLE DELIVERY MODE APPEARS BEST

- RELATIVELY INSENSITIVE TO DELIVERY MODE
- ALTERNATE MODES COMPLEX OPERATIONALLY

TUG
OTV FLYDOWN
DIRECT SHUTTLE

PENALTY FACTOR
1.3
1.2
1.1
1.0
0.9
0.8

0   1   2   3
TRAFFIC LEVEL, SOC MASS/YR

STD ORBITER CAN DO THE JOB

- WT PERFORMANCE ADEQUATE FOR SOC BUILD-UP AND LOGISTICS
- BOTH STD & AUG ORBITER COMPATIBLE WITH SOC OPS
- OMS NOT REQD MOST OF THE TIME

PENALTY FACTOR
1.5
1.4
1.3
1.2
1.1
1.0

140   160   180   200   220   240
ALT, NMI

Rockwell International

Space Operations and
Satellite Systems Division

80SSD10855
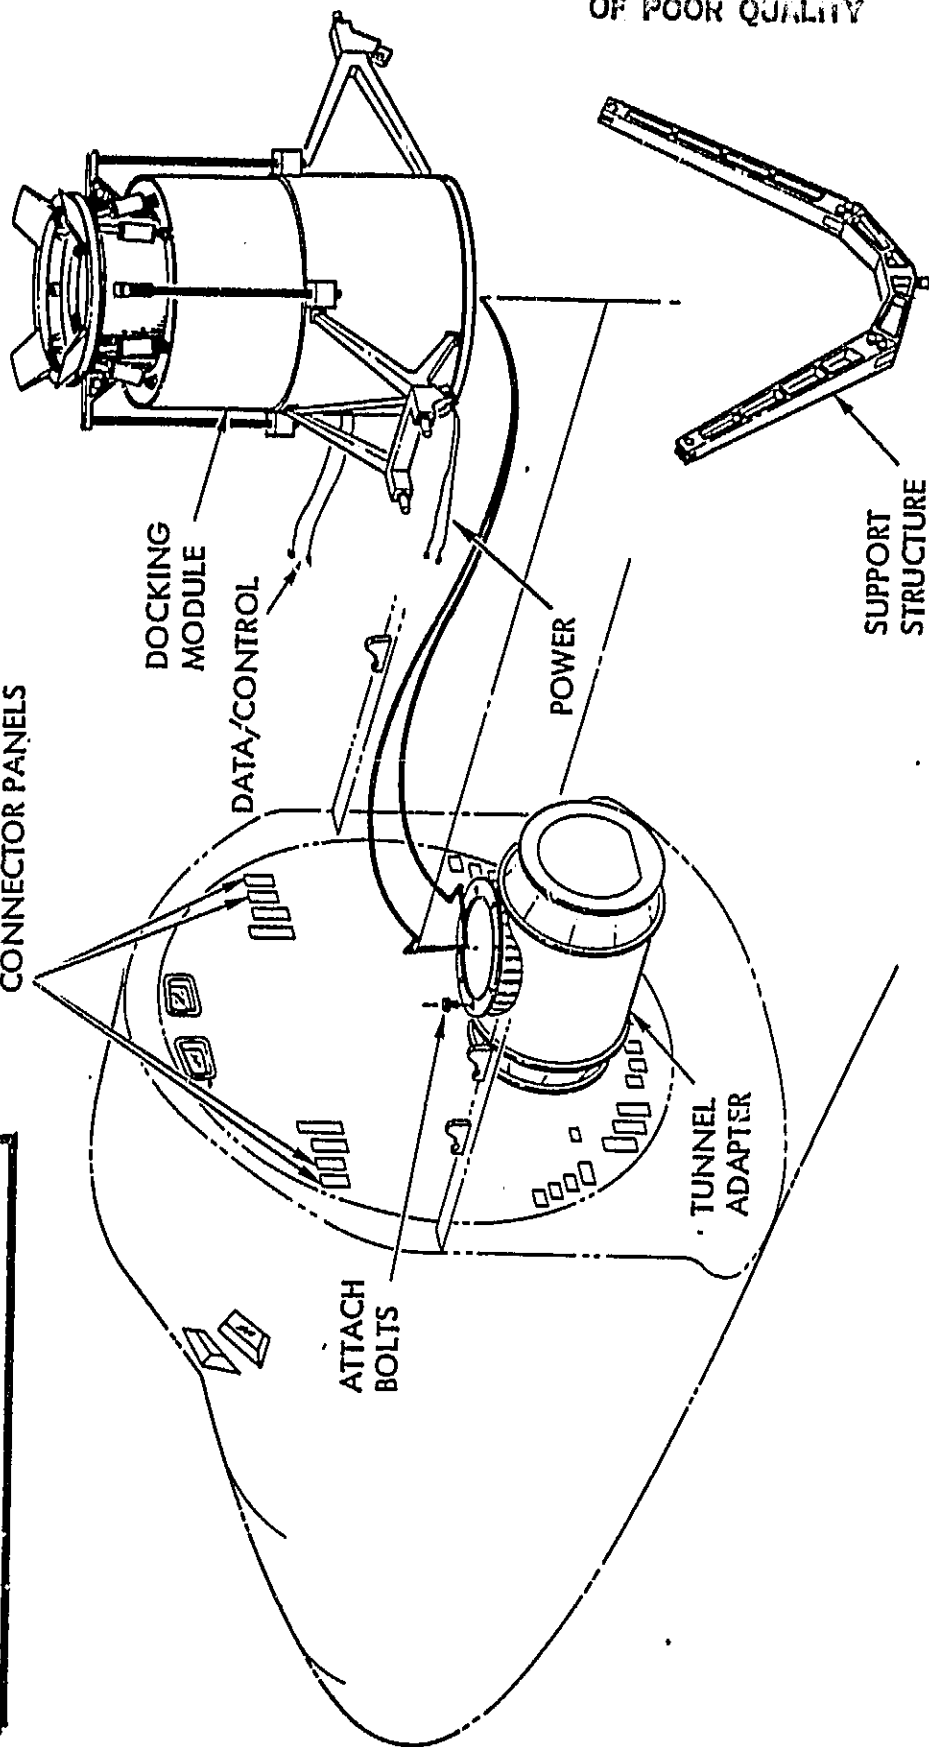
6

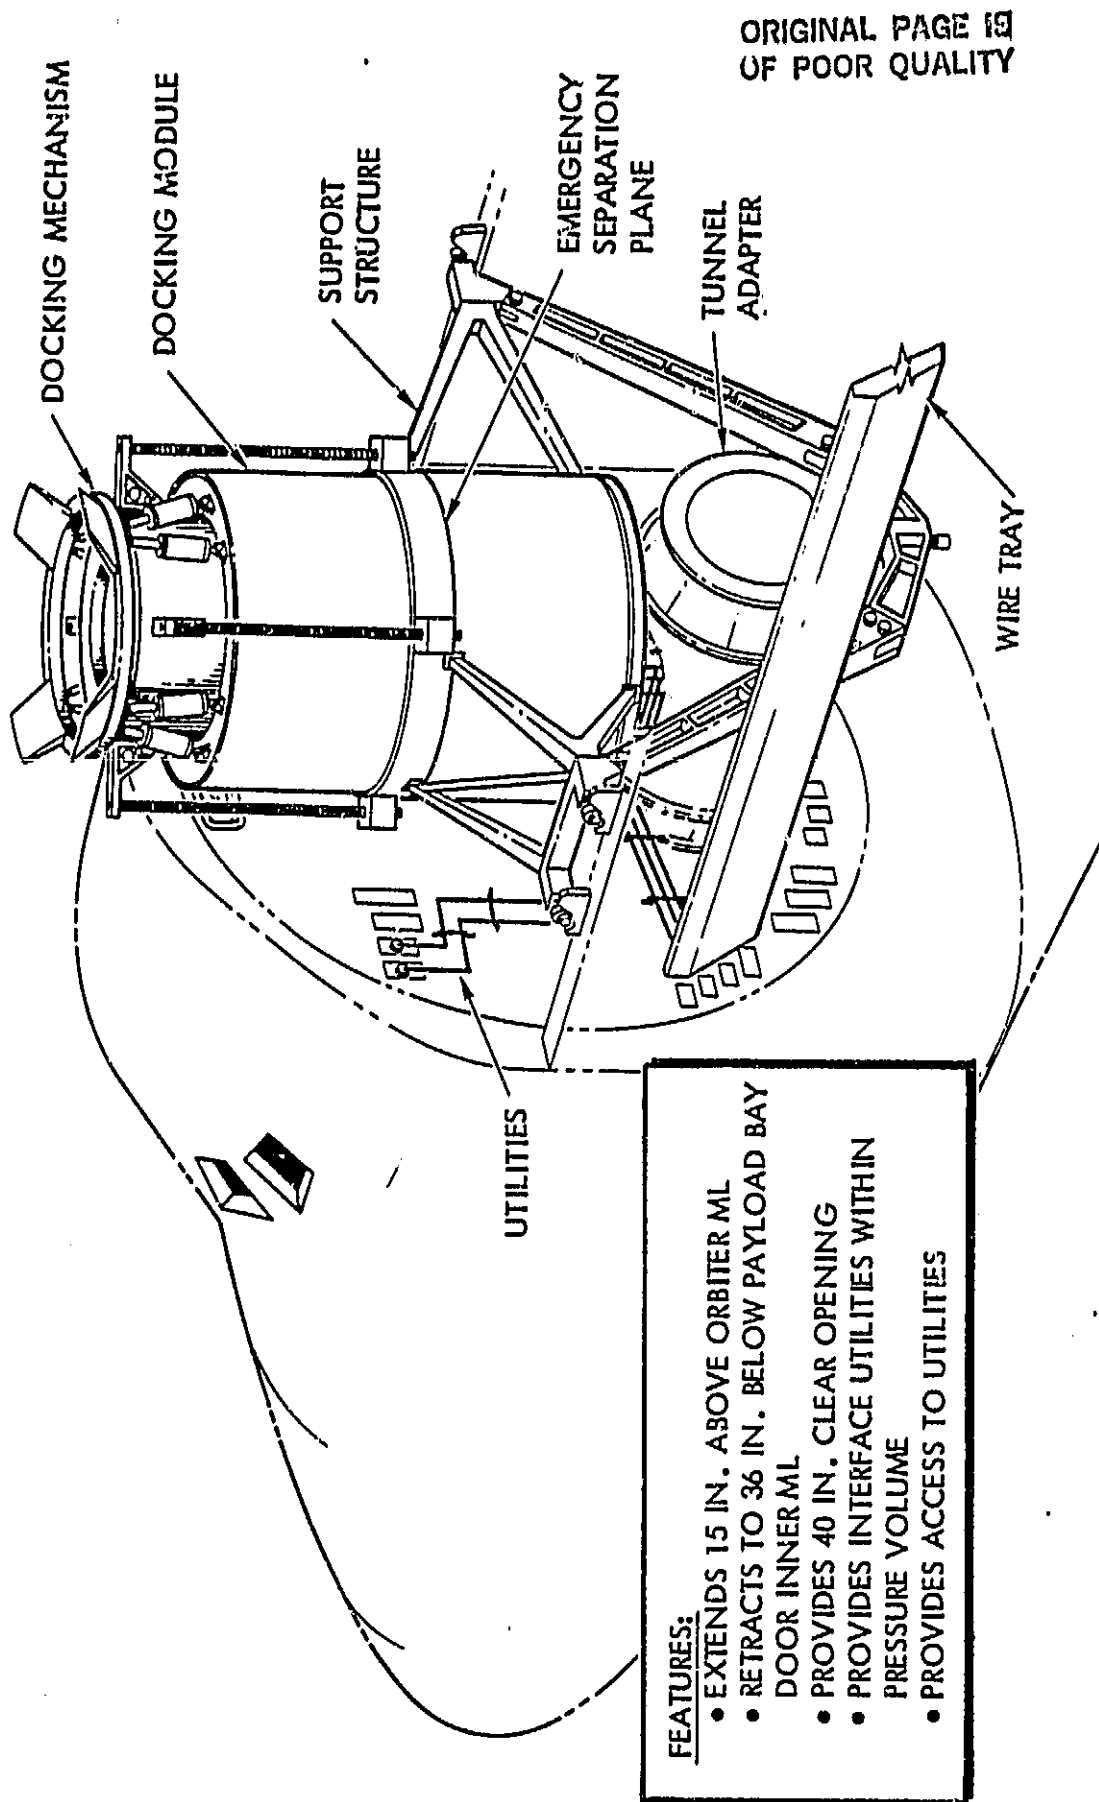# DOCKING MODULE CONCEPT

DOCKING MODULE IS DESIGNED FOR
EASY CHANGEOUT - LIKE CARGO

DATA/CONTROL
CONNECTOR PANELS

DOCKING
MODULE

DATA/CONTROL
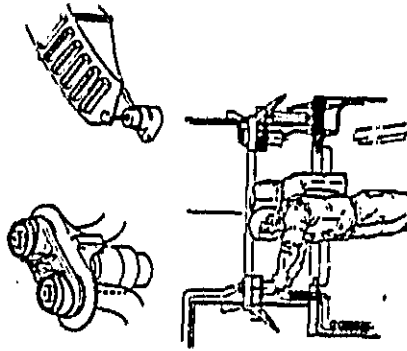
POWER

SUPPORT
STRUCTURE

ATTACH
BOLTS

TUNNEL
ADAPTER

80SSD10665

Rockwell
International

Space Operations and
Satellite Systems Division

7

DOCKING MODULE FEATURES

80SSD10664

DOCKING MECHANISM

DOCKING MODULE

SUPPORT STRUCTURE

EMERGENCY SEPARATION PLANE

TUNNEL ADAPTER

WIRE TRAY

UTILITIES

FEATURES:
- EXTENDS 15 IN. ABOVE ORBITER ML
- RETRACTS TO 36 IN. BELOW PAYLOAD BAY DOOR INNER ML
- PROVIDES 40 IN. CLEAR OPENING
- PROVIDES INTERFACE UTILITIES WITHIN PRESSURE VOLUME
- PROVIDES ACCESS TO UTILITIES

Rockwell International

Space Operations and
Satellite Systems Division

8

DOCKING MODULE CHARACTERISTICS

- UTILITIES INTERFACES:

  - ADEQUATE AVAILABLE AREA ....

  - REMOTE CONNECTIONS ....

  - SERVICEABLE ....

- APPLICATION

SOC

25 KW POWER SYSTEM

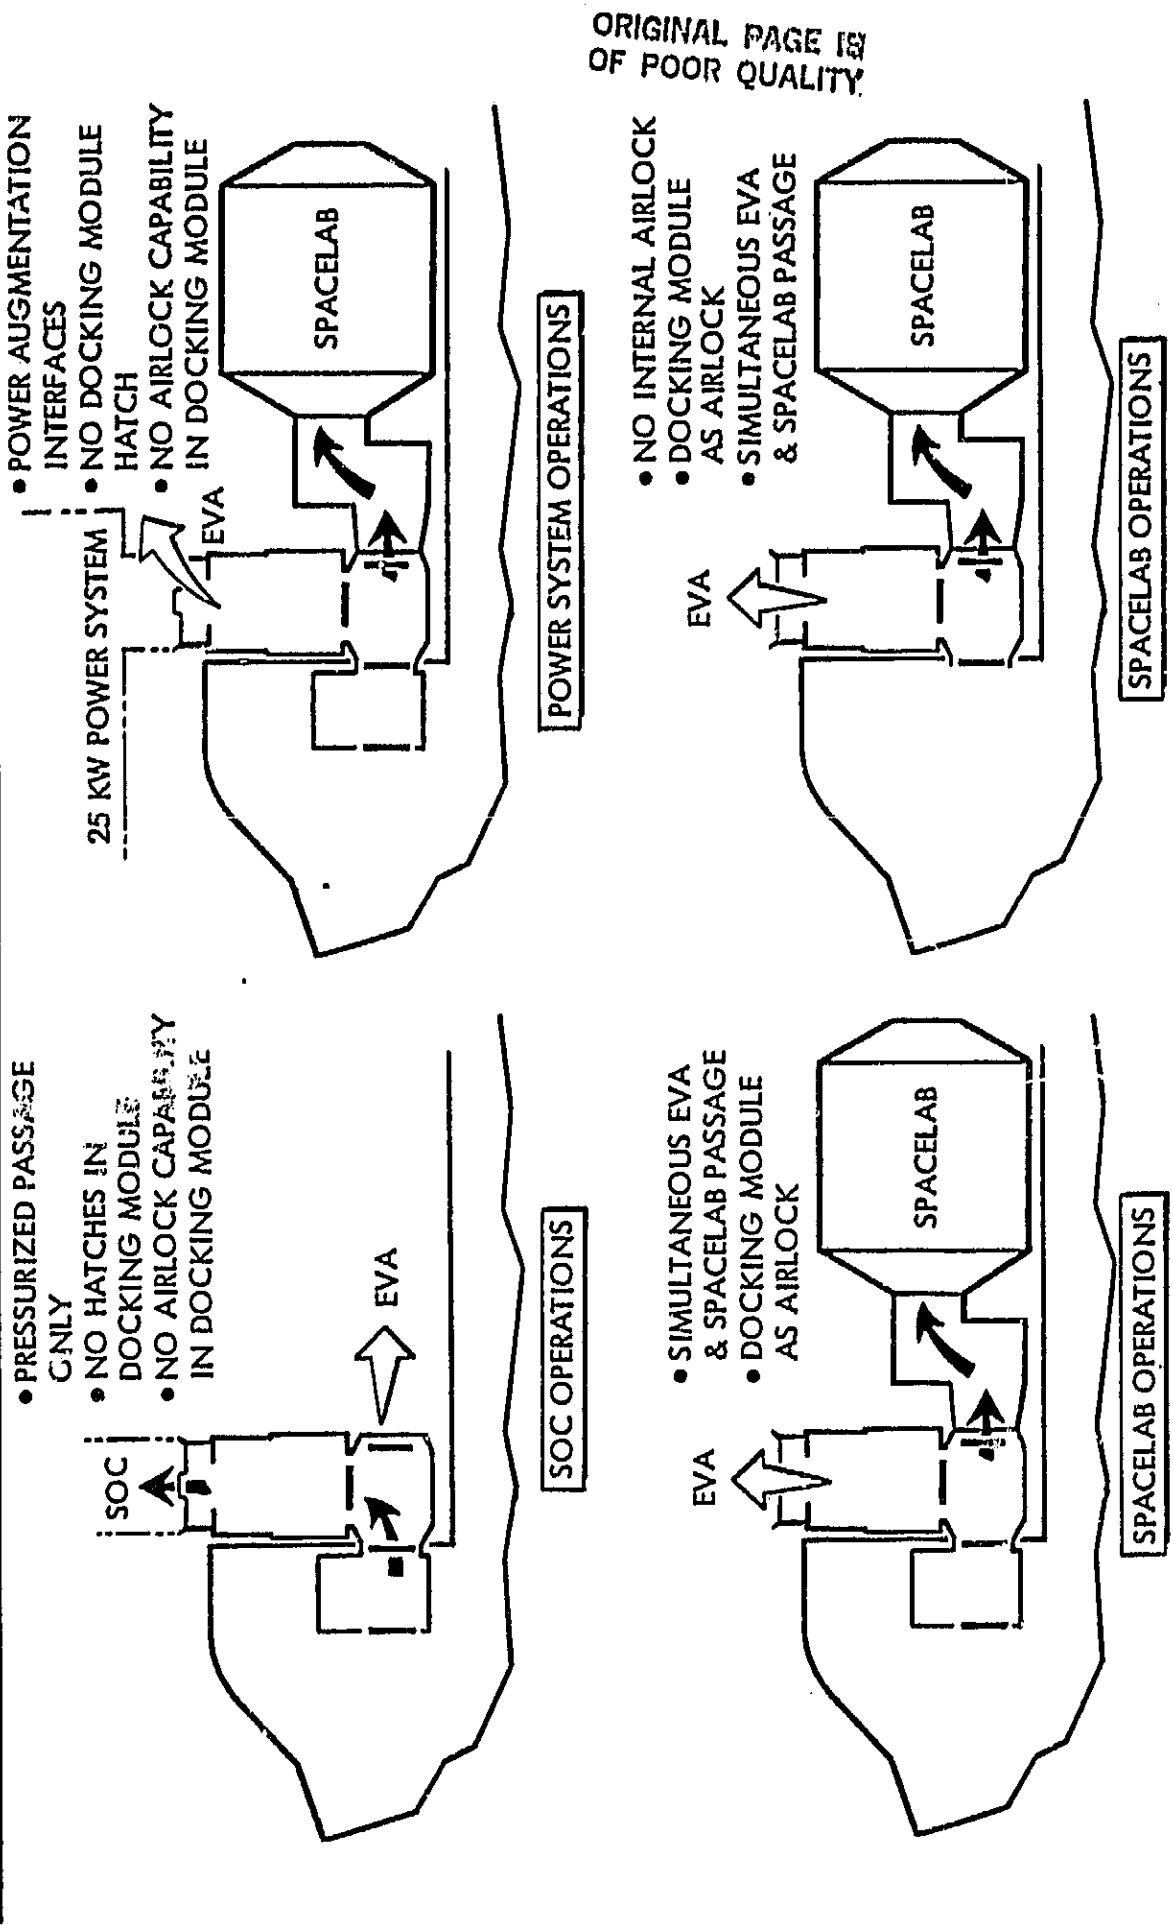OR

80SSD10837

Rockwell International

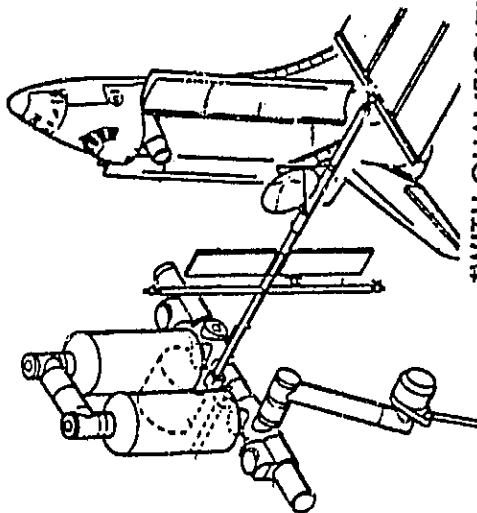Space Operations and
Satellite Systems Division

9

EVA OPTIONS

This chart illustrates that the proposed docking module concept, if provided with an airlock capability, can provide EVA passage with any combination of payloads.
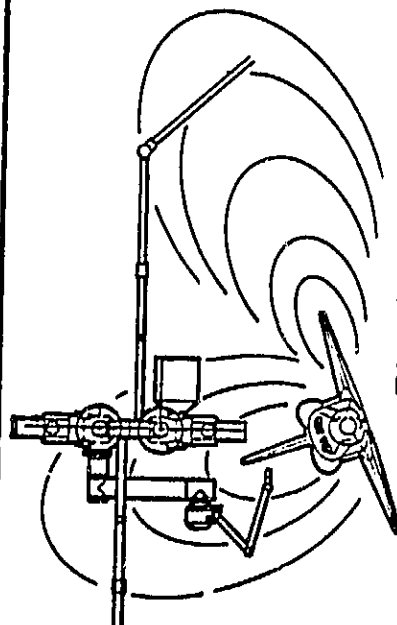
EVA OPTIONS

POWER SYSTEM OPERATIONS

- POWER AUGMENTATION INTERFACES
- NO DOCKING MODULE HATCH
- NO AIRLOCK CAPABILITY IN DOCKING MODULE

25 KW POWER SYSTEM

EVA

SPACELAB

SPACELAB OPERATIONS

- NO INTERNAL AIRLOCK
- DOCKING MODULE AS AIRLOCK
- SIMULTANEOUS EVA & SPACELAB PASSAGE

EVA

SPACELAB

SOC OPERATIONS

- PRESSURIZED PASSAGE ONLY
- NO HATCHES IN DOCKING MODULE
- NO AIRLOCK CAPABILITY IN DOCKING MODULE

SOC

EVA

SPACELAB OPERATIONS

- SIMULTANEOUS EVA & SPACELAB PASSAGE
- DOCKING MODULE AS AIRLOCK

EVA

SPACELAB

DOCKING OPERATIONS

ORBITER CAN DOCK WITH SOC*

*WITH QUALIFICATIONS

RUNAWAY JET POSES POTENTIAL
SAFETY ISSUES

PLUME FROM RCS ABORT THRUSTING
COULD AFFECT SOC DESIGN

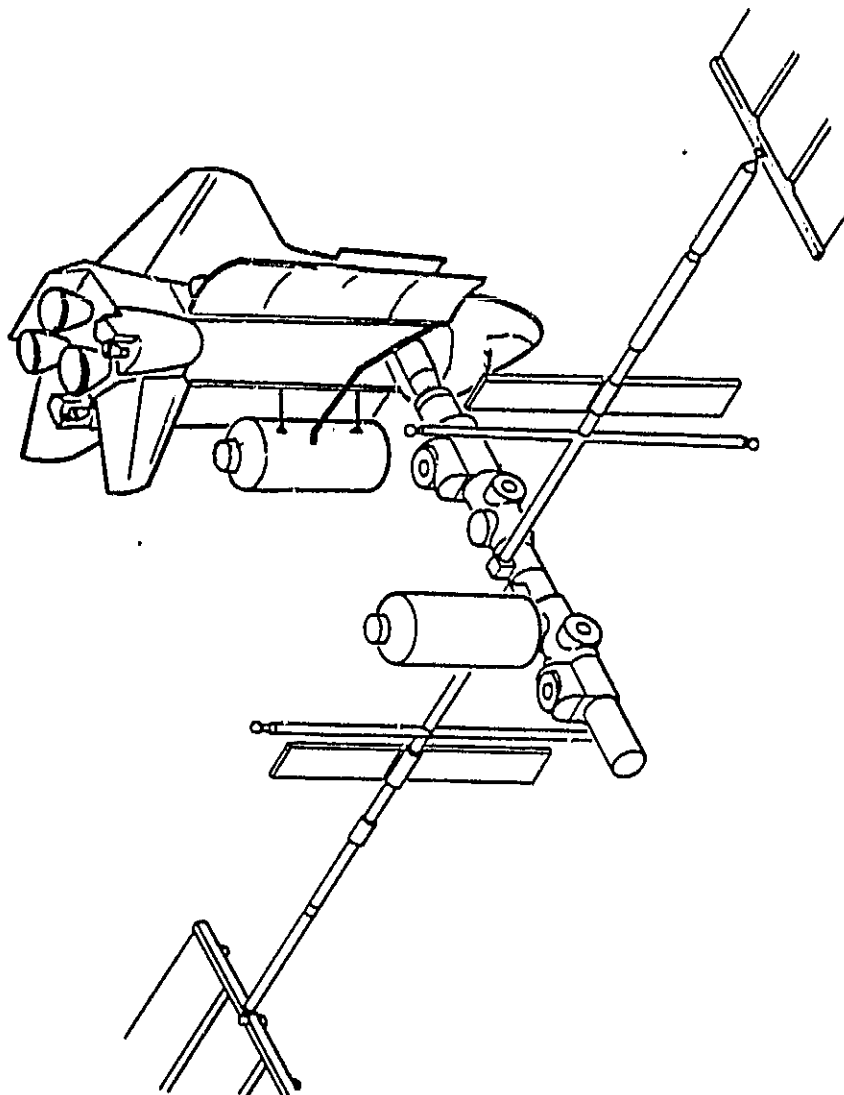$\Sigma M = 22,500$ FT/LB

FURTHER ANALYSES PLANNED
  - EXCURSION ENVELOPES WITH RUNAWAY JETS
  - RMS BERTHING CAPABILITY
  - PLUME IMPINGEMENT EFFECTS

- RECOMMENDED SOC REQMTS KEEP BOTH BERTHING
  & DOCKING CAPABILITY FOR NOW

- ULTIMATE EVALUATION REQUIRES MAN-IN-THE-LOOP
  SIMULATIONS

Rockwell
International

Space Operations and
Satellite Systems Division

80SSD10854

11

80SSD10830

SOC ASSEMBLY

SOC SHOULD BE – AND CAN BE – DESIGNED TO ACCOMMODATE
BUILD-UP BY ANY OF SEVERAL SCENARIOS

Rockwell
International

Space Operations and
Satellite Systems Division

12

POTENTIAL SOC SCENARIOS

This chart illustrates two possible SOC buildup scenarios. The top scenario depicts the basic plan in which the various SOC modules are produced and delivered in the most logical sequence to achieve "full-up" operational capability in the earliest feasible time period.
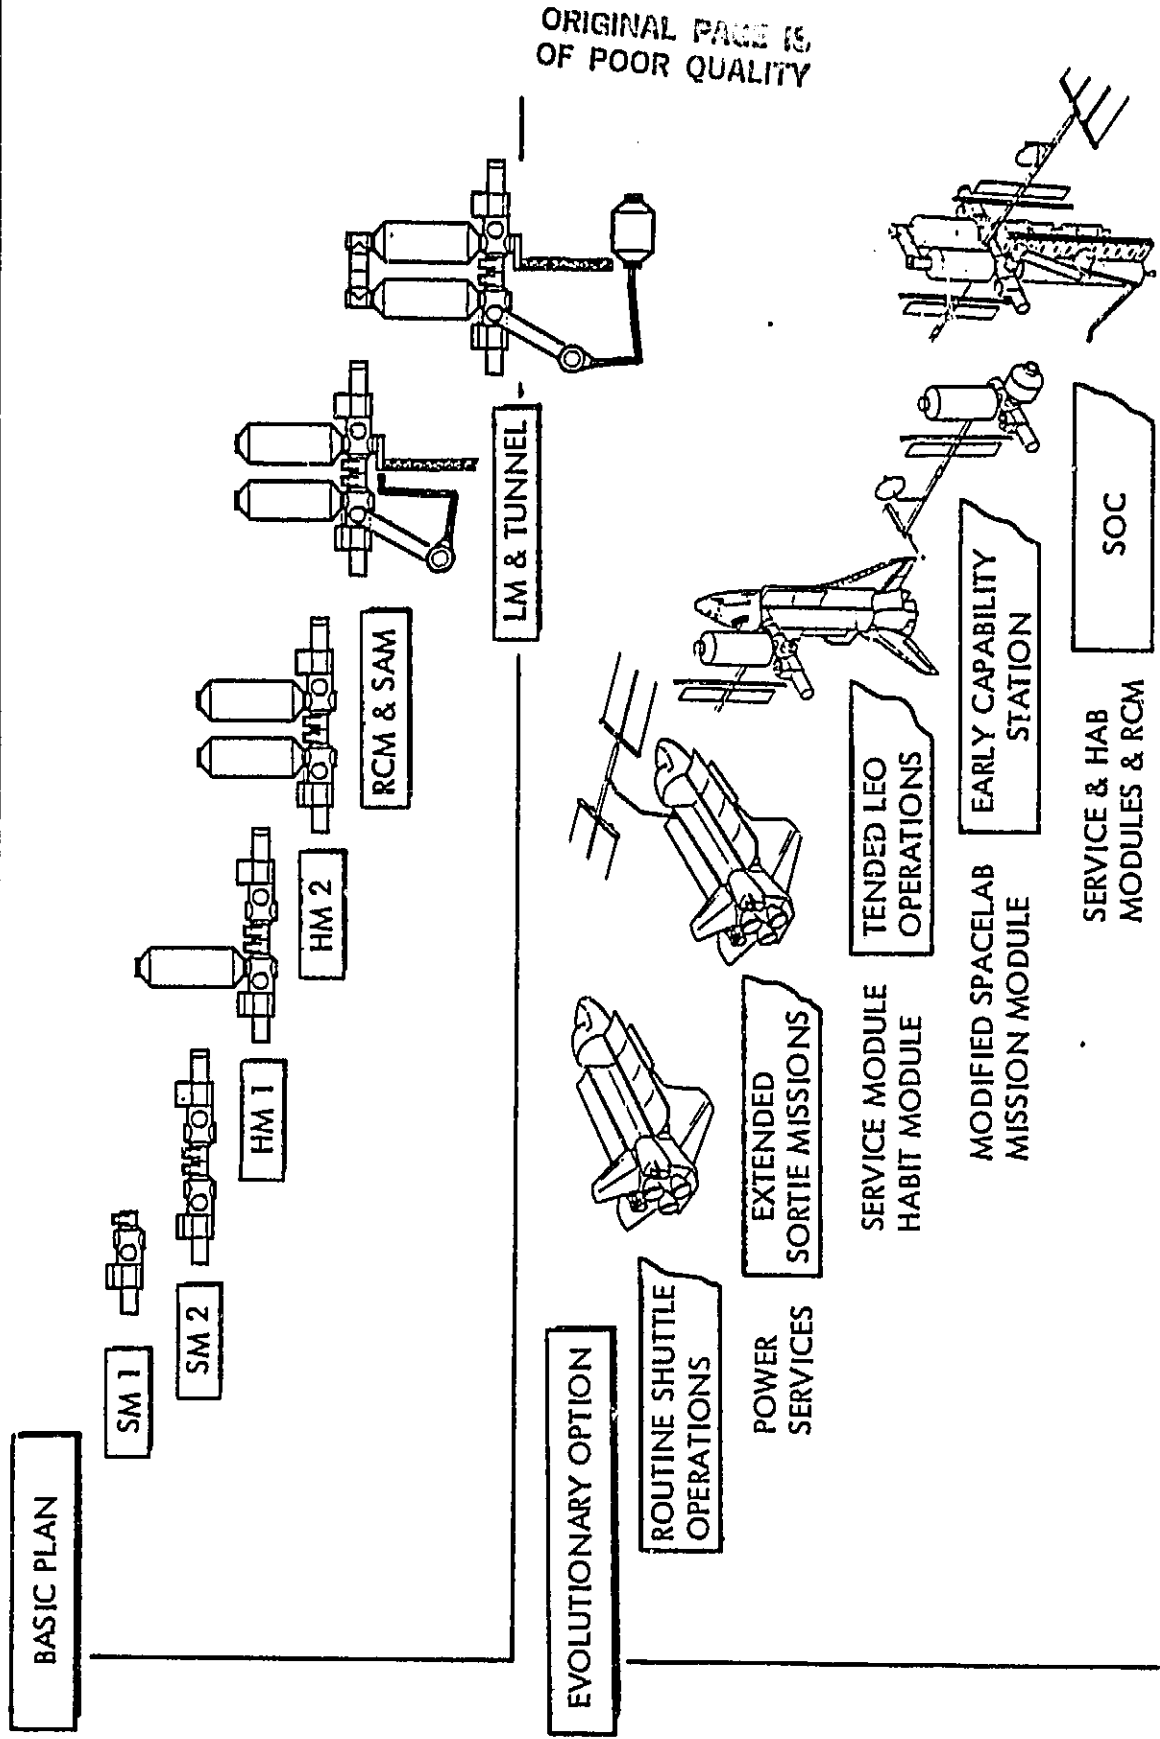
This plan, which is in accord with NASA guidelines, has been examined in detail to determine the orbiter's capability to deliver and assemble the SOC system.

The second scenario shows one of many possible "evolutionary" build-up options.

In this scenario, the orbiter's sortie capability would first be augmented by the power extension package (PEP). For longer more-advanced missions, the initial SOC service and habitability modules would be assembled to provide necessary services and comfortable crew quarters. Eventually, the economic drive to improve the utilization of the Shuttle fleet might lead to the earliest autonomous SOC. In the case shown, the spacelab might be accommodated as a mission module on the early SOC. However, for accommodation aboard SOC, the spacelab mission module would require extensive modifications in the areas of meteoroid protection, heat rejection, hatches, and structure. Other possible mission modules might include payload pallets.

With the delivery of the remaining modules, the SOC's full-up operational capability would be achieved.

POTENTIAL SOC SCENARIOS

80SD10836

BASIC PLAN

SM 1

SM 2

HM 1

HM 2

RCM & SAM

LM & TUNNEL

EVOLUTIONARY OPTION

ROUTINE SHUTTLE OPERATIONS

POWER SERVICES

EXTENDED SORTIE MISSIONS

SERVICE MODULE HABIT MODULE

TENDED LEO OPERATIONS

MODIFIED SPACELAB MISSION MODULE

EARLY CAPABILITY STATION

SERVICE & HAB MODULES & RCM

SOC

Rockwell International

Space Operations and
Satellite Systems Division

13

SPACE STATION EVALUATION

This chart presents the main pro's and con's of several space program alternatives leading to permanent manned capability/space station. The basic word content of the chart was taken from Mr. John F. Yardley's presentation to the NASA Council on 4-5 June 1980.

The black arrows at the upper right of the table indicate favorable features associated with the Science and Application Manned Space Platform (SAMSP) concept which could also be captured by the SOC concept with suitable evolutionary buildup approaches. The SOC service module along with a habitability module could be operated initially in a shuttle tended mode with support services designed to the needs and merits of potential users. Thus, SOC could gain these additional favorable program attributes while retaining those already granted to it.

In addition to gaining the above programmatic benefits, evolutionary SOC approaches can negate some of the con's listed on the chart. These are signified by the shaded X's at bottom center of the chart. The SOC service module can be used to support a variety of science and technology missions before habitability capability is added. Also, by following an evolutionary program geared to match the support needs of various users the development funding can be stretched out to avoid high funding peaks. Indeed the developments could actually be paced by the merits of the user programs.

Thus, an evolutionary approach to the SOC program can offer a number of programmatic advantages and should be considered in the design definition of the SOC configuration.

SPACE STATION EVALUATION*

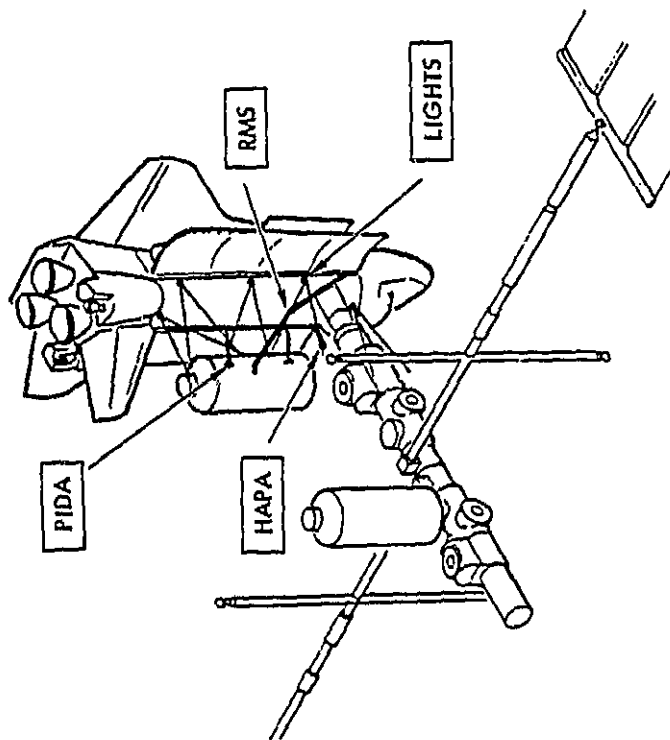|	MOSC	SOC	SAMSP
PRO	• EARLIEST MANNED LONG-DURATION CAPABILITY • USER NEED ORIENTED • LOWEST COST	• PROVIDES LONG-RANGE FOCUS BEYOND 1990 • NECESSARY MAJOR STEP TO GEO SPACE STATION & LARGER CONSTRUCTION OPERATIONS • CAN APPROACH LEVEL OF PREDICTED USSR ACTIVITIES IN LATE 80'S • PROVIDES CONSIDERABLE SAFETY MARGINS FOR PERMANENT OCCUPANCY	• MODULAR & EVOLUTIONARY WITH ALL STEPS SUPPORTABLE BY USERS ON THEIR OWN MERITS • UTILIZES 25 kW POWER SYSTEM FOR POWER, STABILIZATION, CDMS • OPERATED INITIALLY IN SHUTTLE-TENDED MODE (LOW EARLY COSTS) TO BENEFIT SCIENCE MODULES
CON	• NOT CONFIGURED INITIALLY FOR OPERA-TIONS SUPPORT • LIMITED GROWTH CAPABILITY	• LIMITED SCIENCE CAPABILITY IN INITIAL CONFIGURATION • OTV SUPPORT & LARGE SPACE CON-STRUCTION NOT A "NEEDS" DRIVER TODAY • CONCURRENT DEVELOPMENT OF BASE STATION & OPERATIONAL FACILITIES REQUIRES 5T B PEAK FUNDING	• DELAYS MANNED LONG-DURATION CAPABILITY • COULD LEAD TO AN UNDULY COM-PROMISED MANNED SYSTEM • PLACES INCREASED MAN-RATING REQUIREMENTS ON BASIC SASP/25 kW PS

*FROM J.F. YARDLEY PRESENTATION
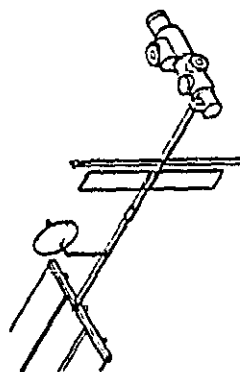TO NASA COUNCIL 4-5 JUNE, 1980

80SSD10829

Space Operations and
Satellite Systems Division

Rockwell International

14

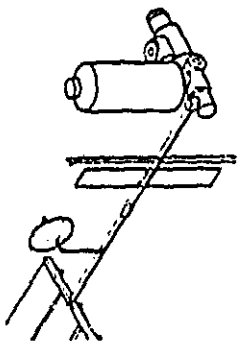# PROVISIONS FOR SOC ASSEMBLY

80SD10877

SOC

FEW Δ PROVISIONS REQUIRED OF SOC
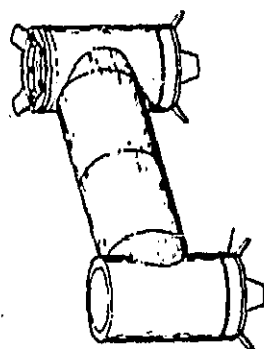TO ACCOMMODATE ALL POSSIBLE BUILD-UP MODES

SM

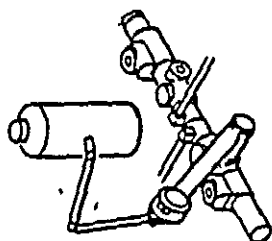- INTERIM ATTITUDE STABILIZATION FOR SAFE REVISIT

HAB. MODULE

- SHOULD HAVE INDEPENDENT ECLSS FOR MAX FLEXIBILITY
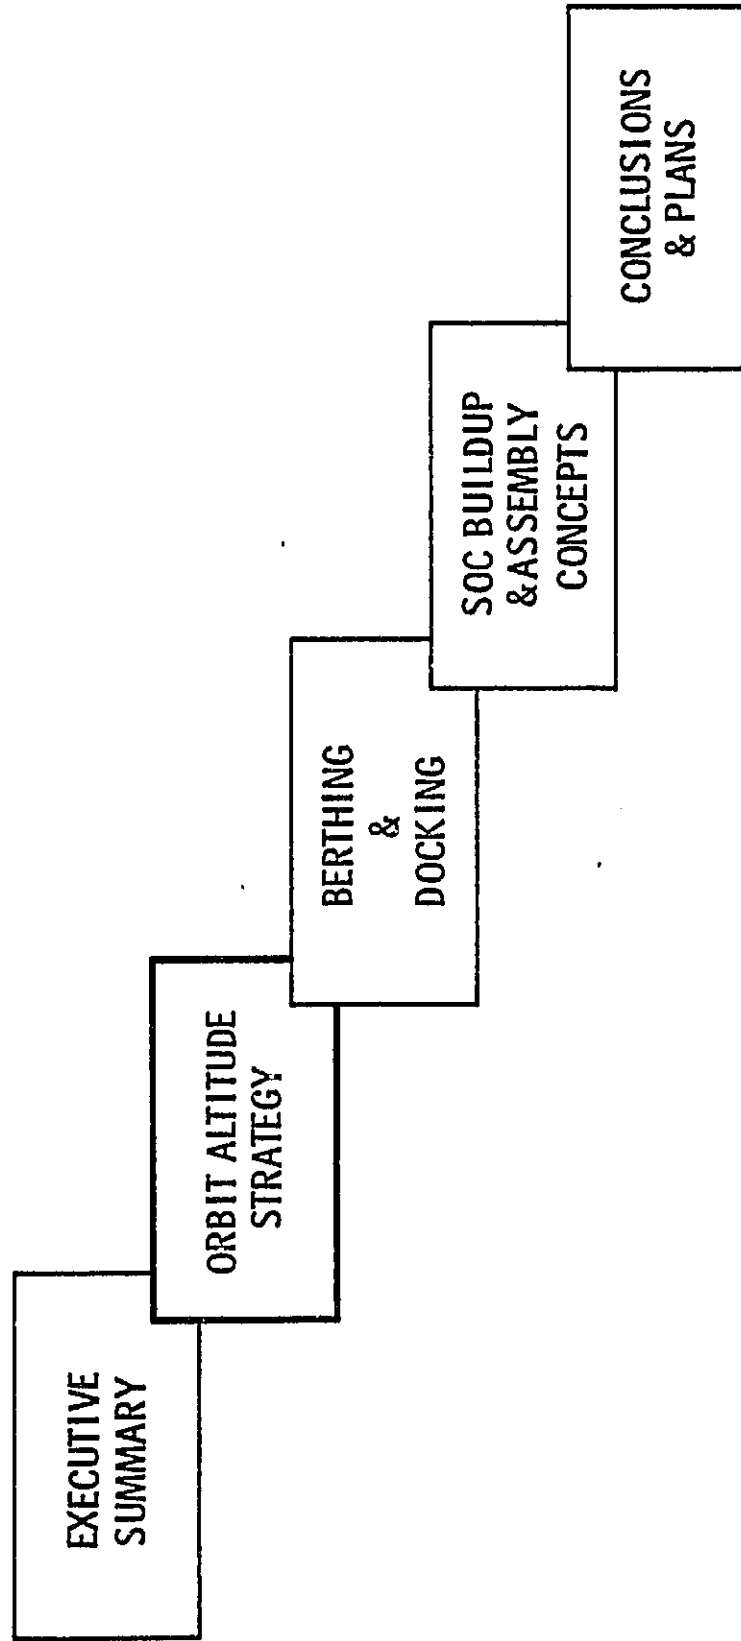
TUNNEL

- PROVIDE FOR POTENTIAL CLOCKING

RCM

- NO IMPACT

ORBITER

ORBITER PROVISIONS IN DEVELOPMENT OR PLANNED

RMS

LIGHTS

PIDA

HAPA

Rockwell International

Space Operations and
Satellite Systems Division

15

CONCLUSIONS

- SOC SHOULD FLY A VARIABLE ALTITUDE STRATEGY -- COMBINES SAFETY WITH EFFICIENCY

- STANDARD ORBITER CAN DO THE JOB

- STATUS OF ORBITER MCR AND 25 KW POWER SYSTEM PROGRAMS DEMANDS EARLY DEFINITION OF REQUIREMENTS AND STANDARDIZATION

- ORBITER HAS ADEQUATE CONTROLLABILITY TO SAFELY DOCK WITH SOC, IF RCS / CONTROL FAILURES CAN BE AVOIDED -- COULD BE CRITICAL TO SOC SAFETY

- THE RCS / CONTROL ISSUE REQUIRES ADVANCED SIMULATIONS FOR RESOLUTION

- SOC CAN BE AND SHOULD BE DESIGNED TO ACCOMMODATE NOMINAL AND EVOLU-TIONARY MODES OF BUILD-UP AND VARIATIONS ON THESE MODES

- THE STANDARD ORBITER CAN ASSEMBLE THE SOC WITH AIDS CURRENTLY IN-DEVELOPMENT AND PLANNED
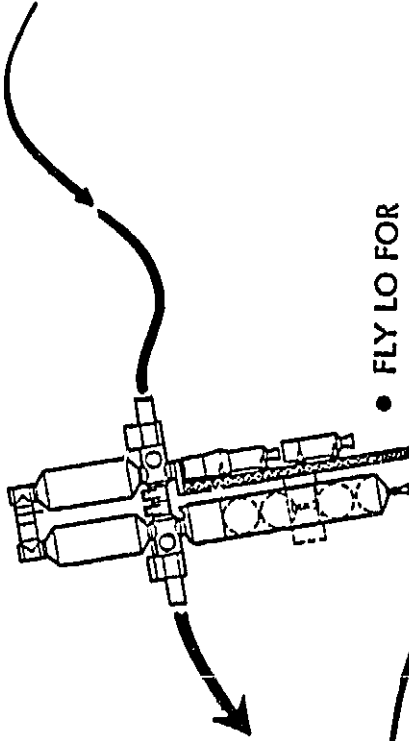
BRIEFING OUTLINE

EXECUTIVE SUMMARY

ORBIT ALTITUDE STRATEGY

BERTHING & DOCKING

SOC BUILDUP & ASSEMBLY CONCEPTS

CONCLUSIONS & PLANS

80SSD10834

Rockwell International

Space Operations and
Satellite Systems Division

17

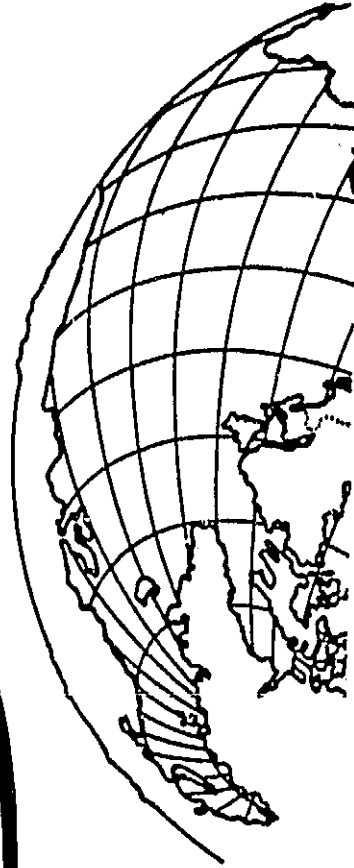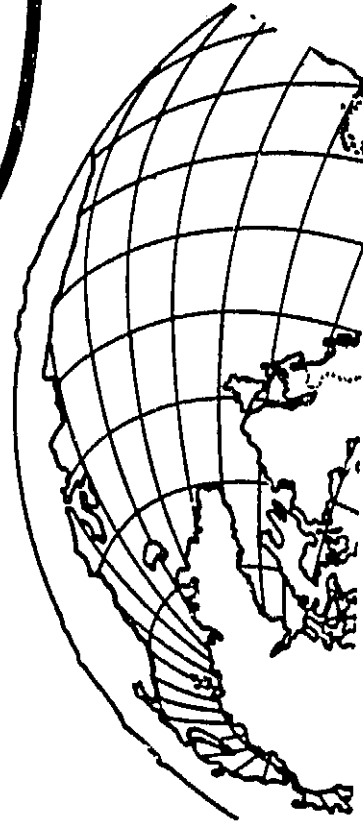# SOC ORBIT ALTITUDE

USE VARIABLE ALTITUDE STRATEGY

- FLY LO FOR
  LOW DENSITY ATMOS
  HI SOC TRAFFIC

- FLY HI FOR
  HI DENSITY ATMOS
  LOW SOC TRAFFIC

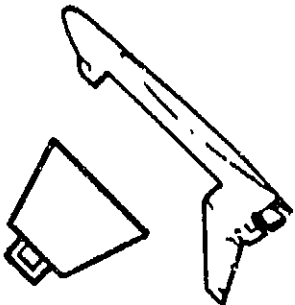CAN SAVE 10 – 15 PERCENT
LOGISTICS COSTS

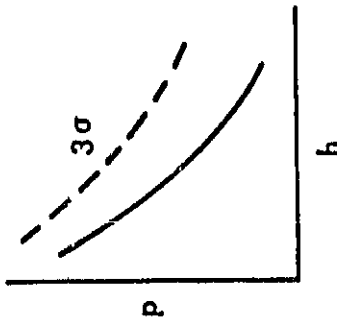80SSD10786

Rockwell
International

Space Operations and
Satellite Systems Division

18

IMPLICATIONS OF VARIABLE ALTITUDE STRATEGY

✓ • SIGNIFICANT SAVINGS IN SOC LOGISTICS COSTS

• FLY MOST LOGISTICS MISSIONS WITHOUT OMS

• COULD REQUIRE UP TO 50 PERCENT MORE SOC PROPELLANT DESIGN CAPACITY

• REQUIRES MISSION SUPPORT FOR VARIABLE EPHEMERIS

  • MCC/GROUND SUPPORT

  • LAUNCH OPPORTUNITY INTERVAL/RENDEZVOUS PHASING

SOC ORBIT ALTITUDE FACTORS

SHUTTLE DELIVERY PERFORMANCE
- STD ORBITER
- AUGMENTED ORBITER

LOGISTICS DELIVERY MODE
SHUTTLE DIRECT TO SOC
TUG ASSIST

ATMOSPHERIC DENSITY
3σ
P
h

SOC BALLISTIC $\left(\dfrac{W}{C_D A}\right)$
BASIC SOC 10 PSF
OTV 10-75 PSF
CONSTRUCTION 1 PSF

SOC PROPULSION I_{SP}
MAKEUP ΔV
$I_{SP} = 230$ SEC

LOGISTICS TRAFFIC LEVELS
LB PER YEAR

LOGISTICS PAYLOAD CHARACTERISTICS
WT LIMITED
VOL LIMITED

ORBIT DECAY LIFE CRITERIA
- REF ATMOS
- SPECIFIED LIFE

P0SSD10785

Rockwell International

Space Operations and
Satellite Systems Division

20

SOC ORBIT ALTITUDE OPTIMIZATION

PENALTY
FACTOR

- ORBITER PERFORMANCE
- LOGISTICS TRAFFIC
- $\frac{W}{C_D A}$
- I_{SP}
- ATMOS MODEL

OMS KIT
EFFECT

OPTIMUM ALTITUDE

1.0

ALTITUDE

PENALTY FACTOR DEFINITION

NORMALIZED TO NUMBER OF
SHUTTLE FLTS REQUIRED TO
DELIVER ASSUMED TRAFFIC
TO 150 N MI

INCREMENT ABOVE 1.0 ACCOUNTS
FOR SOC MAKEUP ΔV & SHUTTLE
P/L DROP-OFF WITH ALTITUDE

$$\text{PENALTY FACTOR} = \frac{\left(1 + \dfrac{W_{MAKEUP}}{W_{TRAFFIC}}\right)}{\left(\dfrac{W_{STS_{ALT}}}{W_{STS_{150}}}\right)}$$

80SSD10788

ORBIT DECAY CONSIDERATIONS

DECAY TIME TO 100 NMI

- PERIOD OF MAX SOLAR ACTIVITY (1990)

- $\dfrac{W}{C_D A} = 10$ PSF

✔ SAFETY IS THE DRIVER

MAIN FACTORS:
ATMOS MODEL
SOC FAILURE
ORBITER FLEET UNAVAIL

90-DAY DECAY WITH
+3 σ ATMOS
COVERS
3 LEVELS OF ADVERSITY

236 NMI

+3 σ (1980)

+2 σ

NOMINAL

1 YR

6 MONTHS

90 DAYS

TIME (DAYS)

400 300 200 100 0

INITIAL ORBIT ALTITUDE (NMI)

140 160 180 200 220 240 260 280 300

80SSD10789

Space Operations and
Satellite Systems Division

Rockwell
International

22

SOC OPERATIONAL ALTITUDE RANGE

80SSD10790

ALT NMI			
ATMOS	DECAY	OPTIMUM	
		LO TRAFF	HI TRAFF
3σ MAX	236	210	210
NOMINAL MINIMUM	172	200	170

OPERATIONAL ALTITUDE RANGE

170 – 236 NMI

OMS NOT REQUIRED MOST OF THE TIME

- EXAMPLE ALTITUDE VARIATIONS

STD SHUTTLE

$\dfrac{W}{C_D A}$ = 10 PSF

I_{SP} = 230 SEC

LOGISTICS TRAFFIC = 2 SOC MASS/YR

ATMOS = ±2σ

DECAY SAFETY (90 DAY)

OPTIMUM LOGISTICS PERF

ALTITUDE (NMI)

260
240
220
200
180
160

1990 91 92 93 94 1995 96 97 98 99 2000 01

YEAR

Rockwell International

Space Operations and
Satellite Systems Division

23

LOGISTICS SAVINGS WITH SOC VARIABLE ALT STRATEGY
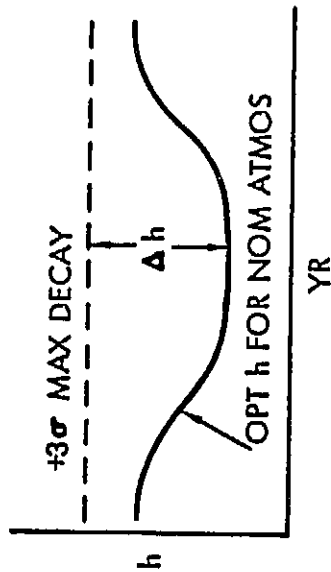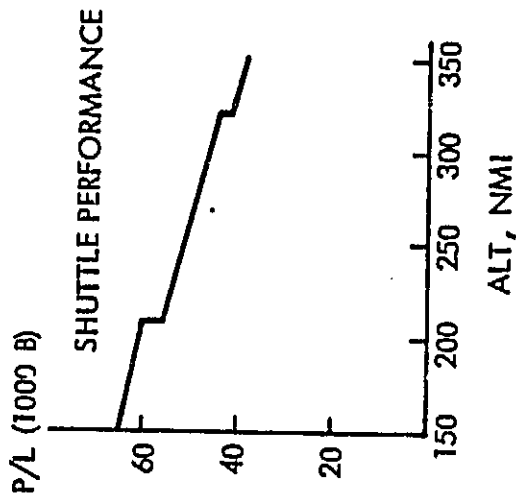
This chart summarizes the typical range of savings in SOC logistics costs attainable with the variable altitude strategy. By "flying" SOC at the lowest safe altitude for the prevailing traffic and atmospheric conditions significant savings in logistics flights can be attained by taking advantage of the greater payload delivery capability of the Shuttle to the lower orbit altitudes.

For example, as shown in the upper right sector of the chart, the shuttle can deliver approximately 50,000 lbs to 236 n. mi altitude (the 3σ atmosphere, 90-day decay criteria altitude). This would be the lowest altitude permissable for operating SOC with a constant altitude strategy. Payloads above 60,000 lbs are attainable at altitudes of 200 n. mi. and below, which is the typical operating range for the variable altitude strategy. This is more than a 20 percent increase in payload capability which can be translated into 20 percent fewer logistics flights to handle the required logistics traffic. Even accounting for the increased SOC orbit makeup propellant required at the lower altitudes, the net savings in logistics flights is from 10 to 12 percent over the full-range of atmospheric variations throughout a typical 11-year solar cycle.

LOGISTICS SAVINGS WITH SOC VARIABLE ALT STRATEGY

ORIGINAL PAGE IS
OF POOR QUALITY

SHUTTLE PERFORMANCE

P/L (1000 B)

60

40

20

150 200 250 300 350

ALT, NMI

90 DAY DECAY

$\frac{W}{C_D A}$ = 10 PSF

I_{SP} = 230 SEC
STD SHUTTLE

+3σ MAX DECAY

Δh

OPT h FOR NOM ATMOS

h

YR

TIME WEIGHTED
AVERAGE SAVINGS
10 TO 12%

TRAFFIC LEVEL
2 SOC MASS/YR

1/2 SOC MASS/YR

15

10

5

0

PERCENT SAVINGS

1990   1995   2000

YEARS

Rockwell
International

Space Operations and
Satellite Systems Division

24

80SSD10791

SOC PROPELLANT SIZING

80SSD10792

BASIS FOR SIZING

BASIC REQ: 90 DAYS + 90 DAY CONTINGENCY
180 DAYS TOTAL
MAX ORBIT MAKEUP = 12000 LB
MAX ORBIT ALTITUDE CHANGE
NOM MAX TO +3σ MAX
$\Delta h \approx 50$ NMI
W_P = 114 LB/NMI $\approx$ 5500 LB
REQUIRED DESIGN CAPACITY
17500 LB (USABLE PROPELLANT)

DECAY LIFE

365
180
90 DAYS

ATMOS DENSITY

+3σ MAX
+2σ MAX
NOM MAX
NOM MIN

ALTITUDE, NMI — 150, 200, 250, 300

YEARLY PROPELLANT REQD (1000 LB) — 100 80 60 40 20 10 8 6 4 2

Rockwell International

Space Operations and
Satellite Systems Division

25

DELIVERY PERFORMANCE EFFECTS

STANDARD SHUTTLE CAN DO THE JOB

ALTITUDE SENSITIVITY

NOMINAL MAX ATMOS
TRAFFIC = 1 SOC MASS/YR

TRAFFIC SENSITIVITY

SHUTTLE PERF

80SSD10793

Rockwell
International

26

Space Operations and
Satellite Systems Division

SOC LOGISTICS MODE OPTIONS

DIRECT SHUTTLE DELIVERY

- SHUTTLE DELIVERS ALL LOGISTICS P/L's TO SOC

"TUG" ASSISTED DELIVERY

- SHUTTLE DELIVERS ALL LOGISTICS P/L's TO 150 NMI ALT
- "TUG" TRANSFERS P/L's TO SOC ALT
- "TUG" I_{SP} = 250 SEC

OTV FLY DOWN DELIVERY

- SHUTTLE DELIVERS MAKEUP ΔV TO SOC
- SHUTTLE DELIVERS OTV P/L's & PROPELLANT TO 150 NMI
- OTV FLYS TO GEO RETURNS TO SOC, THEN FLYS DOWN TO 150 NMI
- OTV I_{SP} = 460 SEC

80SSD10794

Rockwell International

Space Operations and
Satellite Systems Division

27

DELIVERY MODES COMPARISON

ORIGINAL PAGE IS
OF POOR QUALITY

DIRECT SHUTTLE DELIVERY THE WAY TO GO

- NORMALIZED TO STD SHUTTLE CAPABILITY
- LOGISTICS OPTIMUM AT NOM MAX ATMOS

LOGISTICS MODE

TUG
OTV FLYDOWN
DIRECT SHUTTLE

APPROX 2% SPREAD ACROSS
ALL MODES

PENALTY FACTOR

1.3
1.2
1.1
1.0
0.9
0.8

0   1   2   3

TRAFFIC LEVEL, SOC MASS/YR

SOC ORBIT ALTITUDE WRAP-UP

✓ RECOMMEND VARIABLE ALTITUDE STRATEGY

   • DRIVEN BY ORBIT DECAY OR LOGISTICS OPTIMUM

   • SAVES LOGISTICS FLIGHTS

   • FLY MOSTLY WITHOUT OMS

✓ STANDARD SHUTTLE CAN DO THE JOB

   • "INSENSITIVE" TO ALTITUDE VARIATIONS NEAR THE OPTIMUM

   • BOTH STD & AUGMENTED SHUTTLE ARE COMPATIBLE WITH SOC

   • OMS TYPICALLY NOT REQUIRED.....

   • ENHANCES ACCOMMODATION OF VOLUME LIMITED P/L's

✓ DIRECT SHUTTLE DELIVERY MODE APPEARS BEST

   • NEGLIGIBLE LOGISTICS PERFORMANCE DIFFERENCE AMONG ALL MODES

   • OPERATIONAL COMPLEXITIES WITH OTHER MODES

80SSD10796

Rockwell
International

·Space Operations and
Satellite Systems Division

29

BRIEFING OUTLINE

EXECUTIVE SUMMARY

ORBIT ALTITUDE STRATEGY

BERTHING & DOCKING
- DESIGN
- OPERATIONS

SOC BUILDUP & ASSEMBLY CONCEPTS

CONCLUSIONS & PLANS

80SSD10834

Rockwell International

Space Operations and
Satellite Systems Division

30

PROJECT DOCKING/BERTHING RELATED MILESTONES

STATUS OF MCR & 25 KW POWER
SYSTEM DEMANDS EARLY DEFINITION
OF REQUIREMENTS AND STANDARDIZATION

PROJECT	1980								1981						
	JUNE	JULY	AUG	SEPT	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUNE	JULY	

SOC/SHUTTLE INTERACTION
— ▽ SOC ASSY
— △ DOCKING/BERTHING CONCEPT WORKING GROUP MEETING

SOC SYSTEMS ANALYSIS (BOEING)
△ CONFIG TRADES & BUILD-UP REQ'TS
△ SOC DESIGN & SYSTEM INTEGRATION COMPLETE

SPACE PLATFORM ADVANCED TECHNOLOGY STUDY (MDAC)
△ P.D. OF BERTHING LATCH
△ P.D. UMBILICAL INTERFACE MECH INTERFACE
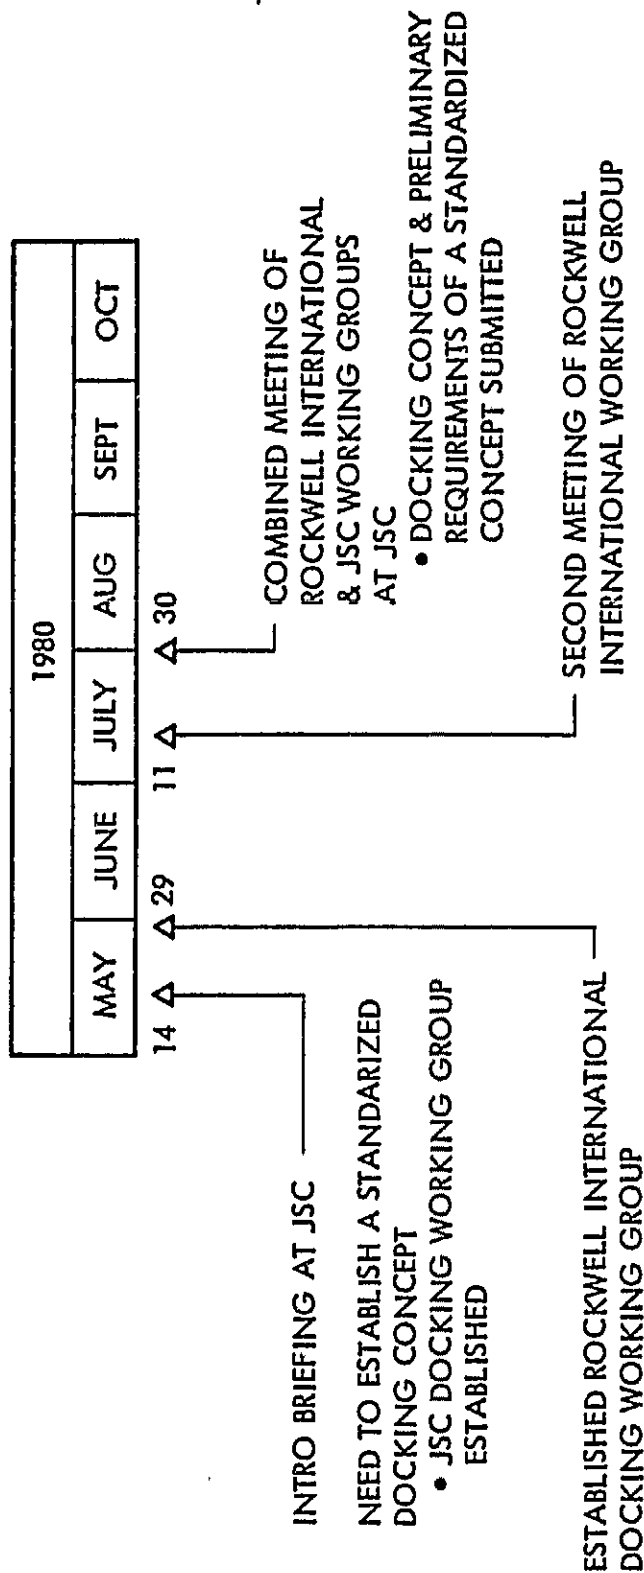△ MODEL DES., FAB., & TEST

25 KW POWER SYSTEM/ORBITER INTEGRATION
△ IDD
△ UPDATE IDD

25 KW POWER SYSTEM PHASE B MDAC TRW
△ REVIEW
△ REVIEW
△ REVIEW
△ REVIEW

SHUTTLE ORBITER
MFG FLOW & BUILD PLAN UPDATE
△ "START" DOCKING MODULE DESIGN MCR 5546

HANDLING & POSITIONING AID
△ RFP (EST)

Rockwell International

Space Operations and
Satellite Systems Division

31

80SSD10757

DOCKING/BERTHING WORKING GROUP ACTIVITIES

1980					
MAY	JUNE	JULY	AUG	SEPT	OCT

14 △   29 △   11 △   30 △

INTRO BRIEFING AT JSC

NEED TO ESTABLISH A STANDARDIZED
DOCKING CONCEPT
  • JSC DOCKING WORKING GROUP
    ESTABLISHED

ESTABLISHED ROCKWELL INTERNATIONAL
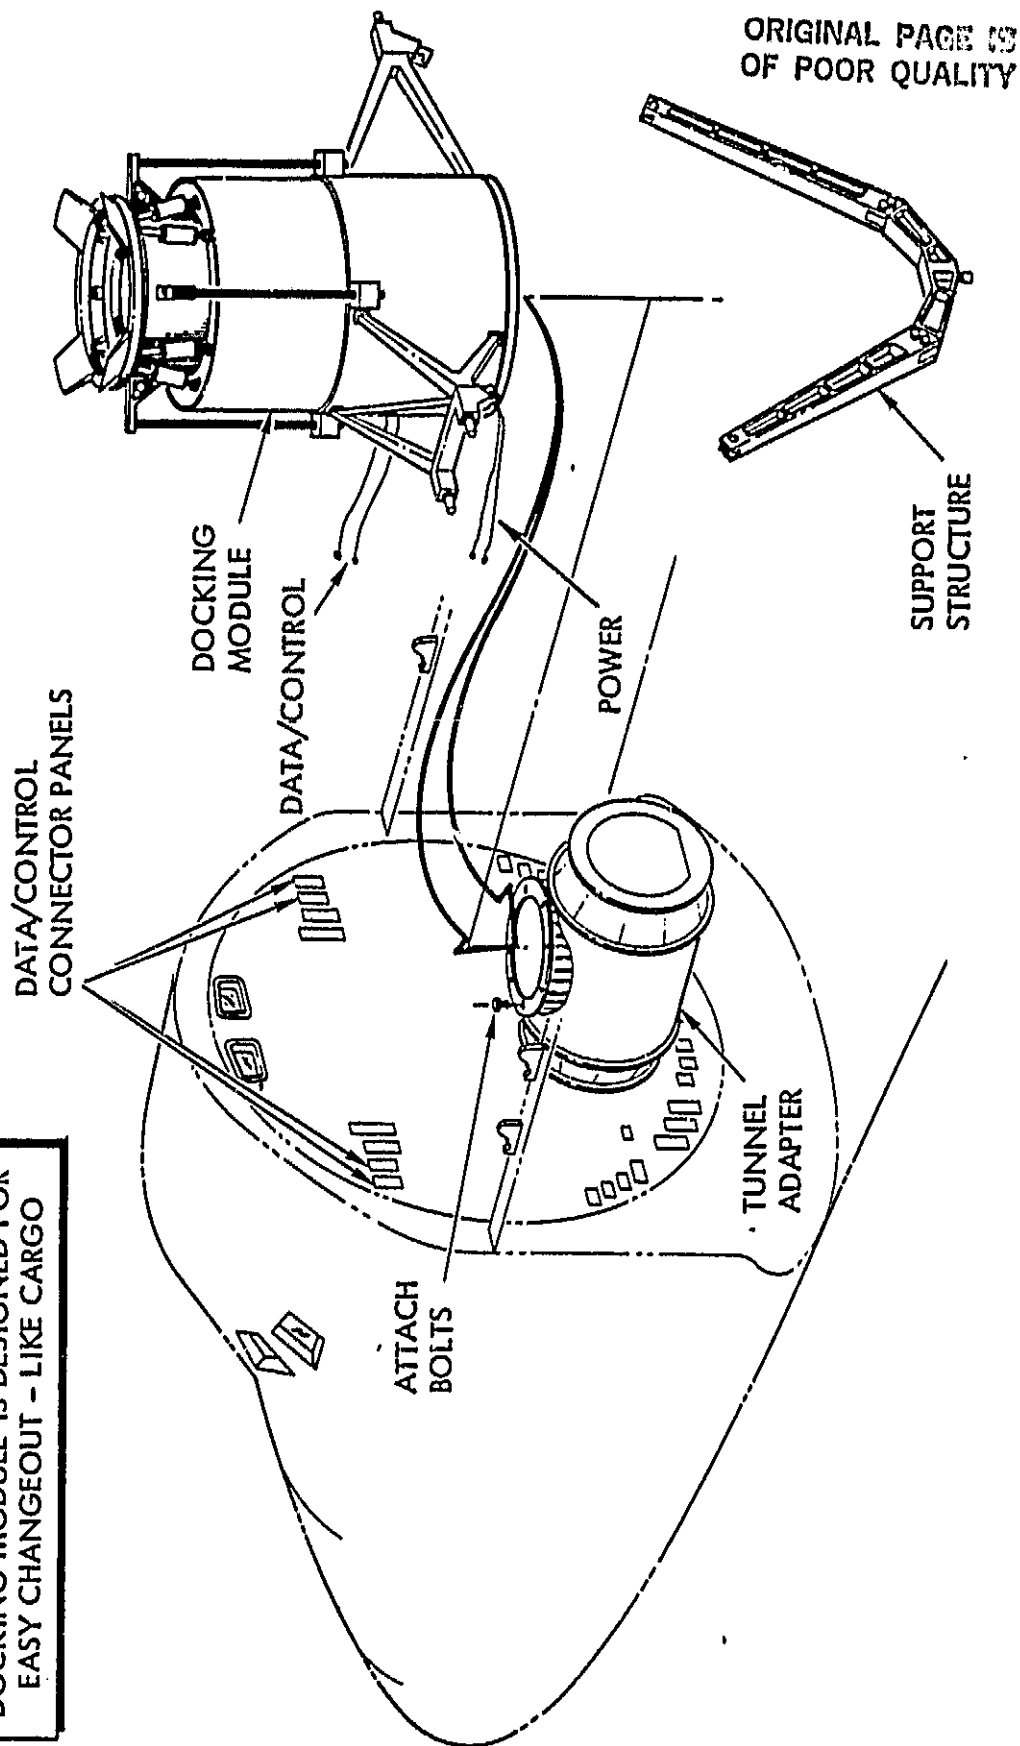DOCKING WORKING GROUP

MEMBERS:
  A.J.STEFAN – CHAIRMAN
  E. KATZ – MANAGER – SOC STUDY
  H. MYERS – SOC SYSTEMS ENGR
  D. DENISON – PROJ MANAGER
    25 KW INTEGRATION
  D. TAAL – SHUTTLE PROJ OFFICE
    DOCKING MODULE

COMBINED MEETING OF
ROCKWELL INTERNATIONAL
& JSC WORKING GROUPS
AT JSC
  • DOCKING CONCEPT & PRELIMINARY
    REQUIREMENTS OF A STANDARDIZED
    CONCEPT SUBMITTED

SECOND MEETING OF ROCKWELL
INTERNATIONAL WORKING GROUP

T. APPLEBERRY – SHUTTLE ADVANCED
    PROJECTS
E. DAZZO – SHUTTLE SIMULATION
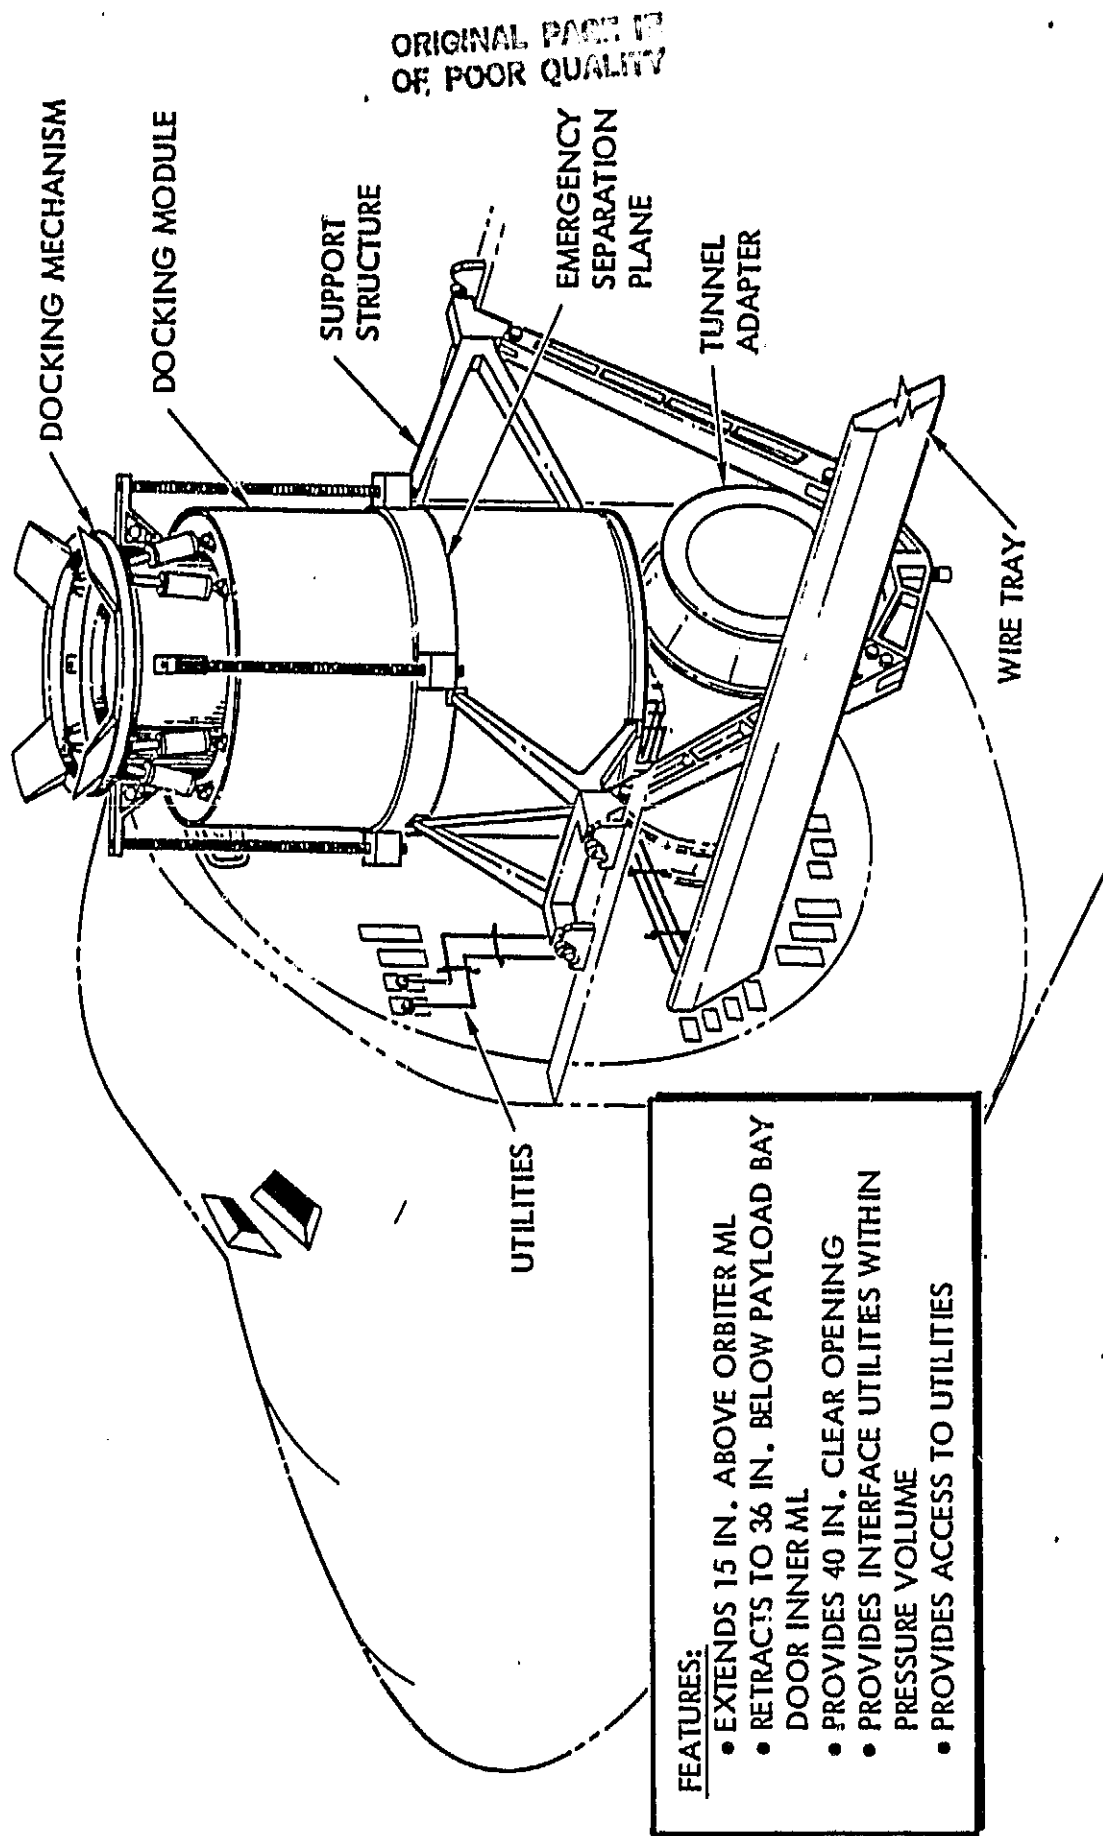J. MANSFIELD – PAYLOAD INTEGRATION
G. FRAZER – STS BUSINESS DEVELOPMENT

DOCKING MODULE CONCEPT
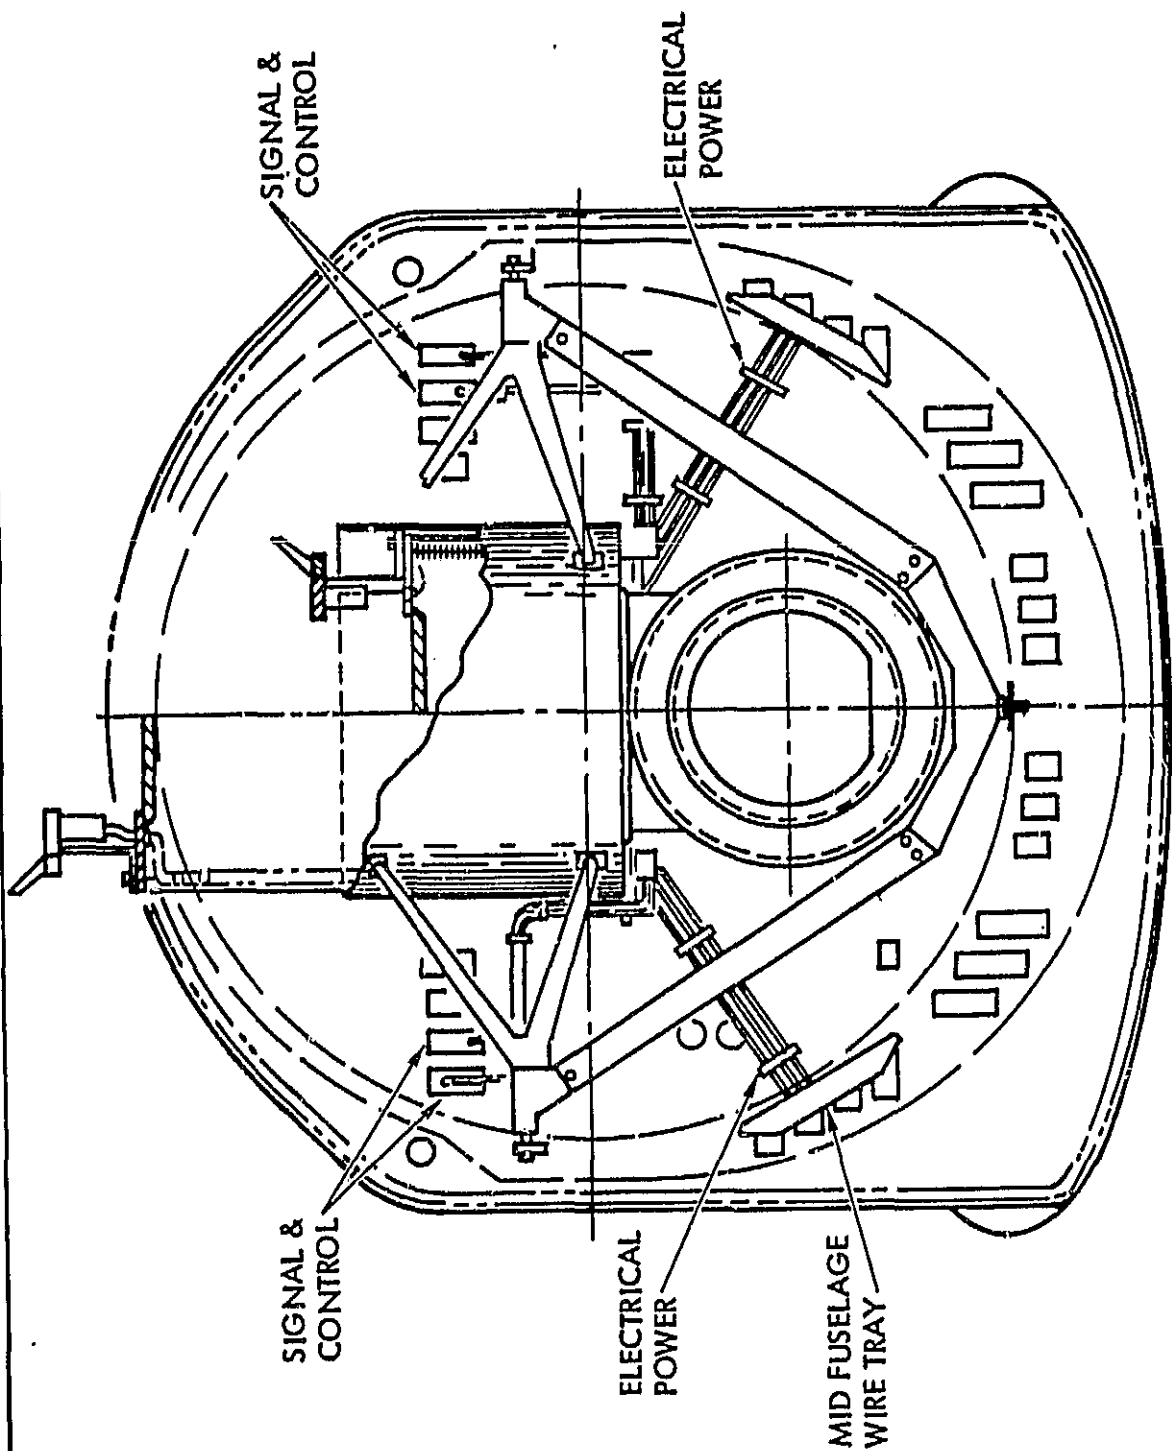
DOCKING MODULE IS DESIGNED FOR
EASY CHANGEOUT – LIKE CARGO

DATA/CONTROL
CONNECTOR PANELS

DOCKING
MODULE

DATA/CONTROL

POWER

SUPPORT
STRUCTURE

ATTACH
BOLTS

TUNNEL
ADAPTER

80SSD10665

Rockwell
International

Space Operations and
Satellite Systems Division

33

DOCKING MODULE FEATURES

DOCKING MECHANISM

DOCKING MODULE

SUPPORT
STRUCTURE

EMERGENCY
SEPARATION
PLANE

TUNNEL
ADAPTER

WIRE TRAY

UTILITIES

80SSD10664

FEATURES:
- EXTENDS 15 IN. ABOVE ORBITER ML
- RETRACTS TO 36 IN. BELOW PAYLOAD BAY
  DOOR INNER ML
- PROVIDES 40 IN. CLEAR OPENING
- PROVIDES INTERFACE UTILITES WITHIN
  PRESSURE VOLUME
- PROVIDES ACCESS TO UTILITIES

Rockwell
International

Space Operations and
Satellite Systems Division

34

UTILITIES INTERFACE ROUTING

80SSD10670

SIGNAL &
CONTROL

ELECTRICAL
POWER

SIGNAL &
CONTROL

ELECTRICAL
POWER

MID FUSELAGE
WIRE TRAY

Rockwell
International
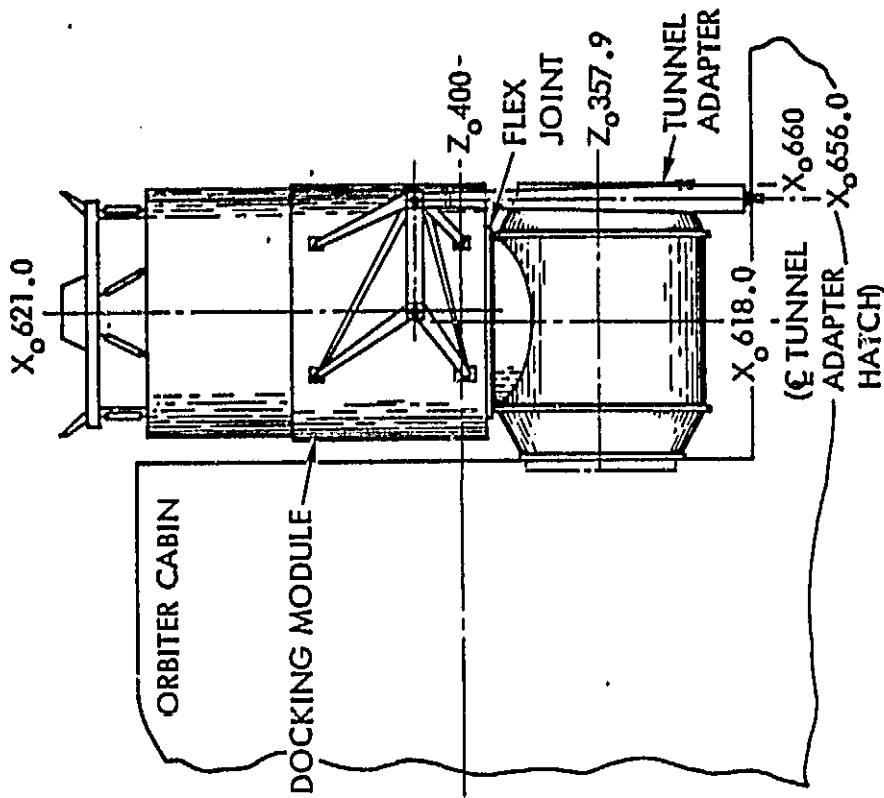
Space Operations and
Satellite Systems Division

35

DOCKING MODULE CONFIGURATION OPTIONS

UTILIZATION OF TUNNEL ADAPTER

ORBITER CABIN

DOCKING MODULE

$X_o 621.0$

$Z_o 400$

FLEX JOINT

$Z_o 357.9$

TUNNEL ADAPTER

$X_o 660$

$X_o 656.0$

$X_o 618.0$
(€ TUNNEL ADAPTER HATCH)

RETAINS INSTALLATION OF:
1. TUNNEL ADAPTER
2. ARS
3. ELECTRICAL

COMPLETE SINGLE ITEM

$X_o 621.0$

ORBITER CABIN

DOCKING MODULE

$Z_o 414.0$

$Z_o 400$

$Z_o 357.9$

$X_o 660$
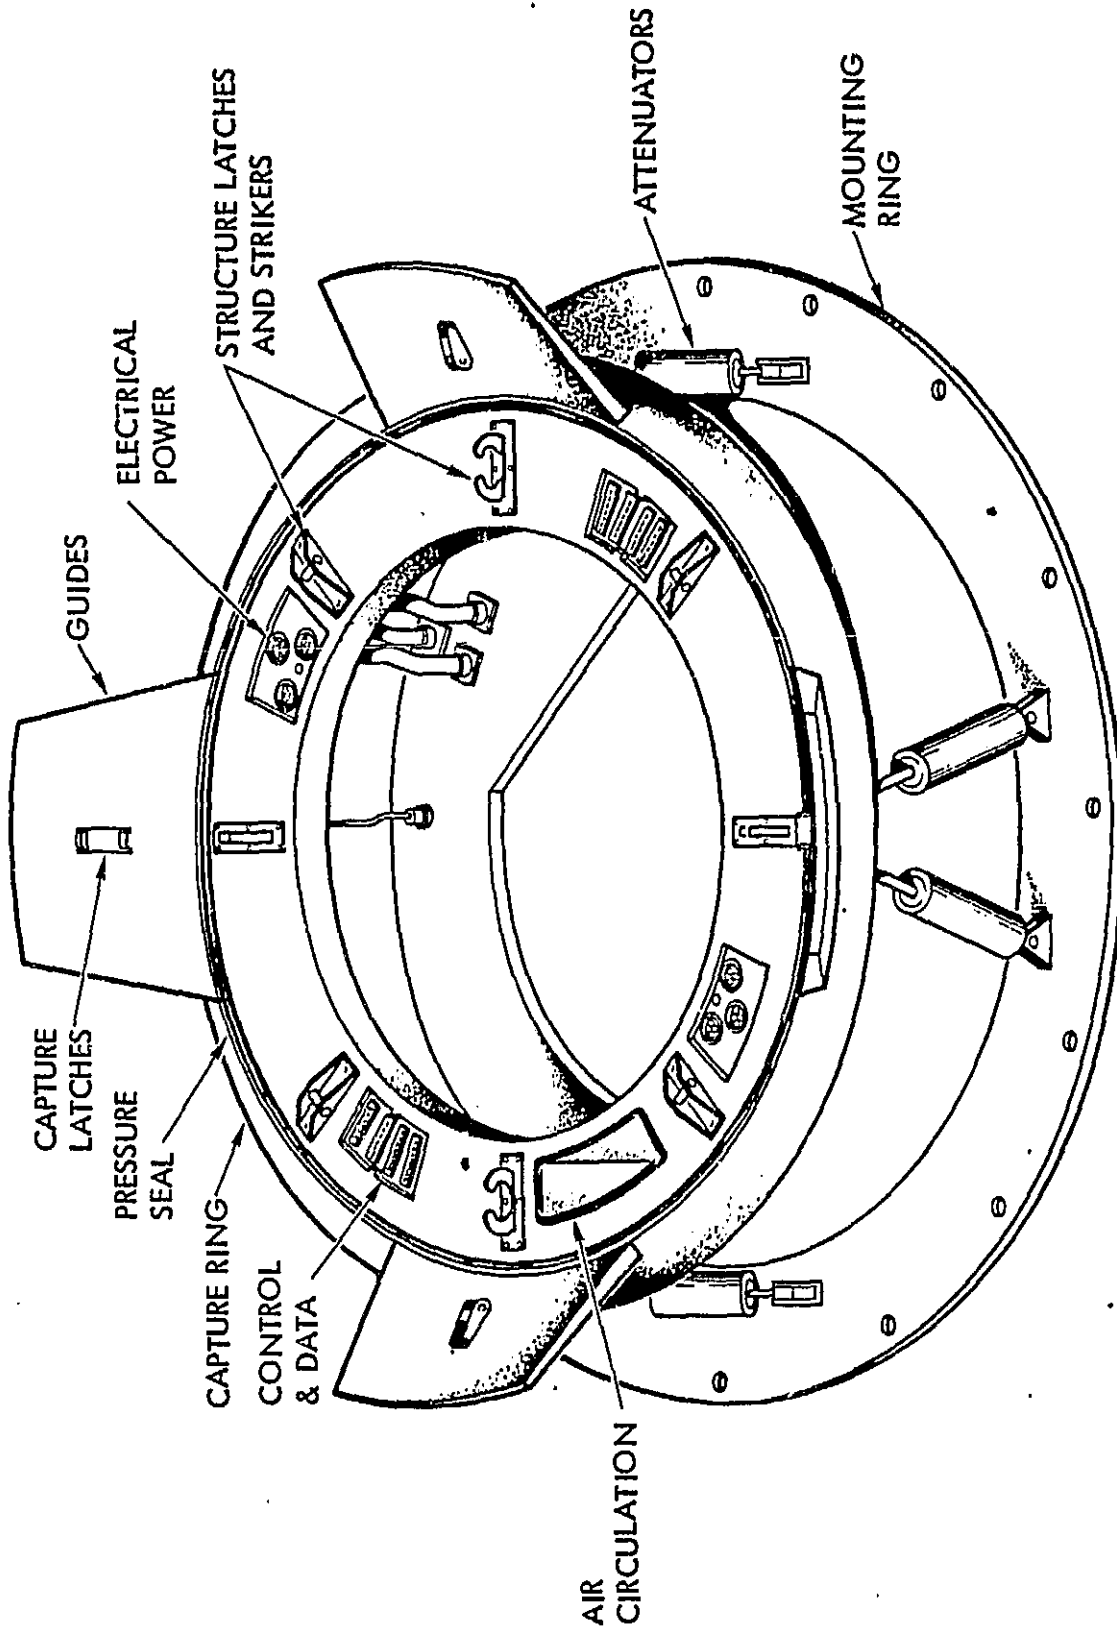
$X_o 656.0$

FLEX JOINT

MATING ARRANGEMENTS

The docking modeule interface was designed for universal usage. In other words, it was designed to berth with any SOC port. Sufficient commonality and standardization features, such as latches, guides and utilities, were retained for the SOC module to SOC module interface. The size and quantity of utility connections are estimates which were based on a previous Rockwell Space Station study. A more detailed look at both types of interfaces is presented in the next few charts.
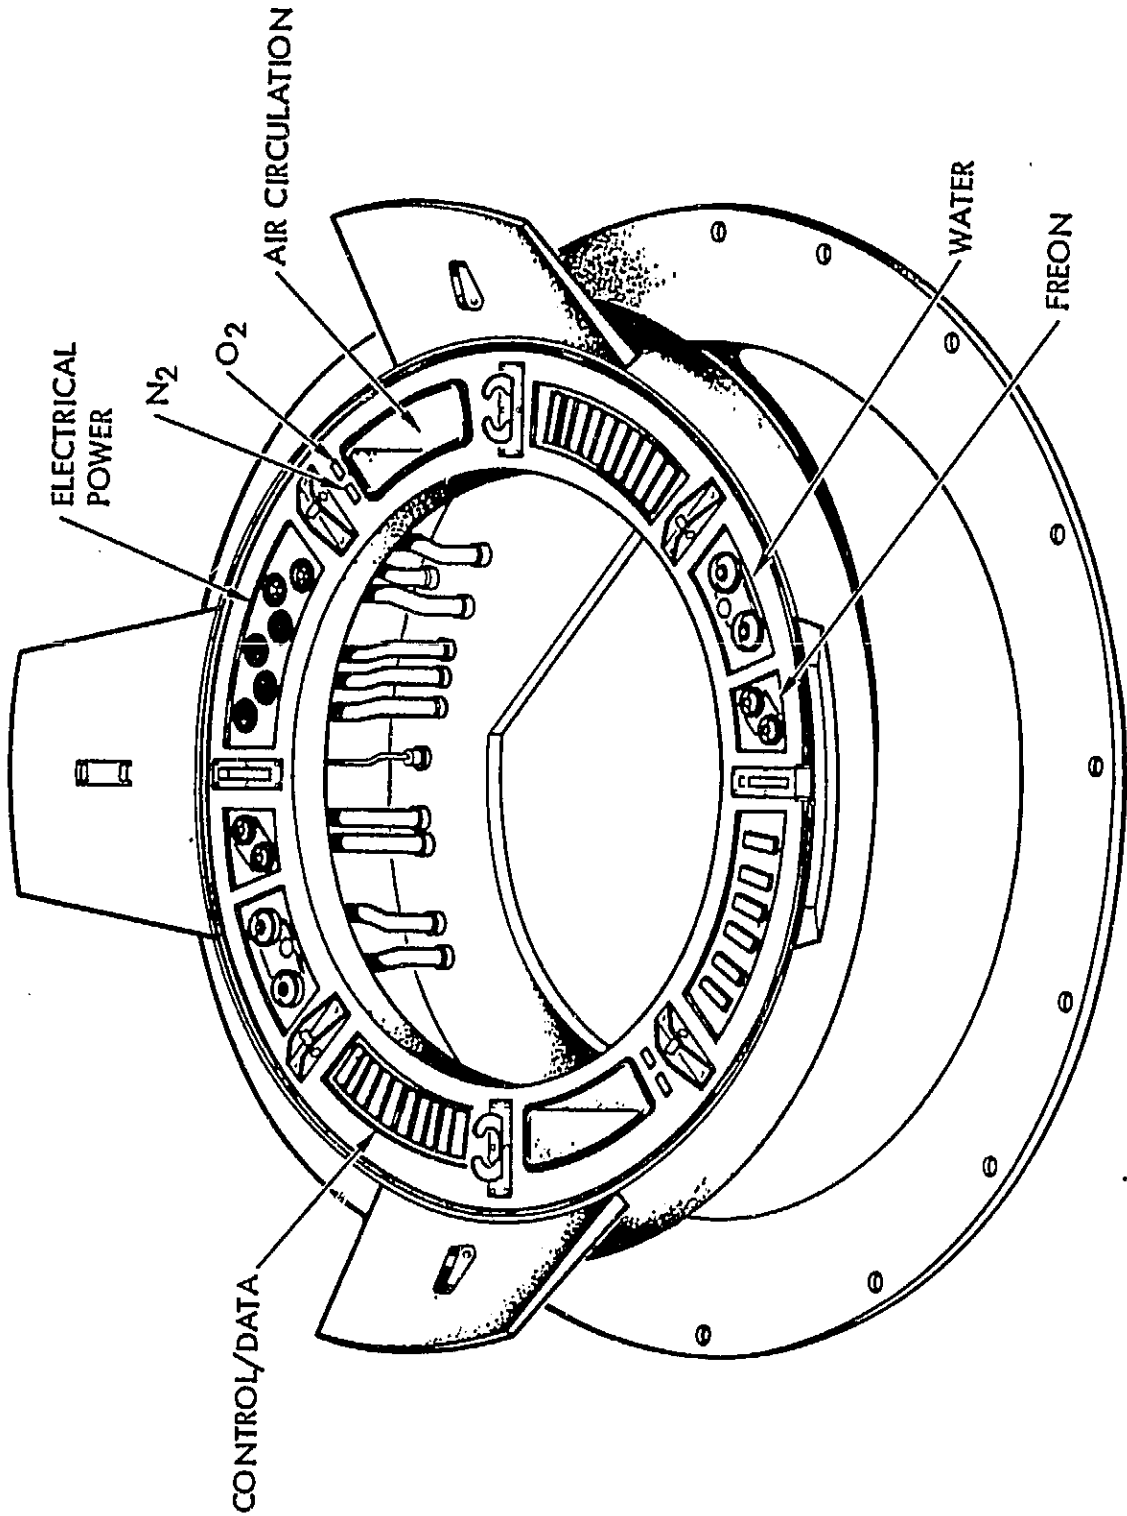
MATING ARRANGEMENTS

80SSD10668

SOC
MODULE
(PASSIVE
ELEMENT)

SOC
MODULE
(PASSIVE
ELEMENT)

SOC
MODULE
(PASSIVE
ELEMENT)

DOCKING
MODULE
(ACTIVE
ELEMENT)

Rockwell
International

Space Operations and
Satellite Systems Division

37

ORBITER TO SOC INTERFACE

80SSD10566

CAPTURE LATCHES

PRESSURE SEAL

CAPTURE RING

CONTROL & DATA

GUIDES

ELECTRICAL POWER

STRUCTURE LATCHES AND STRIKERS

ATTENUATORS

MOUNTING RING

AIR CIRCULATION

Rockwell International

Space Operations and
Satellite Systems Division

38

80SSD10667

SOC TO SOC INTERFACE

AIR CIRCULATION

ELECTRICAL
POWER

N_2

O_2

WATER

FREON

CONTROL/DATA

REMOTE ACTUATED INTERFACE CONNECTORS CONCEPTS

80SD10742

FLUID CONNECTOR

FLUID COUPLINGS

ACTUATOR MECHANISM

PLATEN

ELECTRICAL CONNECTOR

ALLOWABLE OPENING IN STRUCTURE

ELECTRICAL CONNECTORS

PLATEN

ACTUATOR MECHANISM
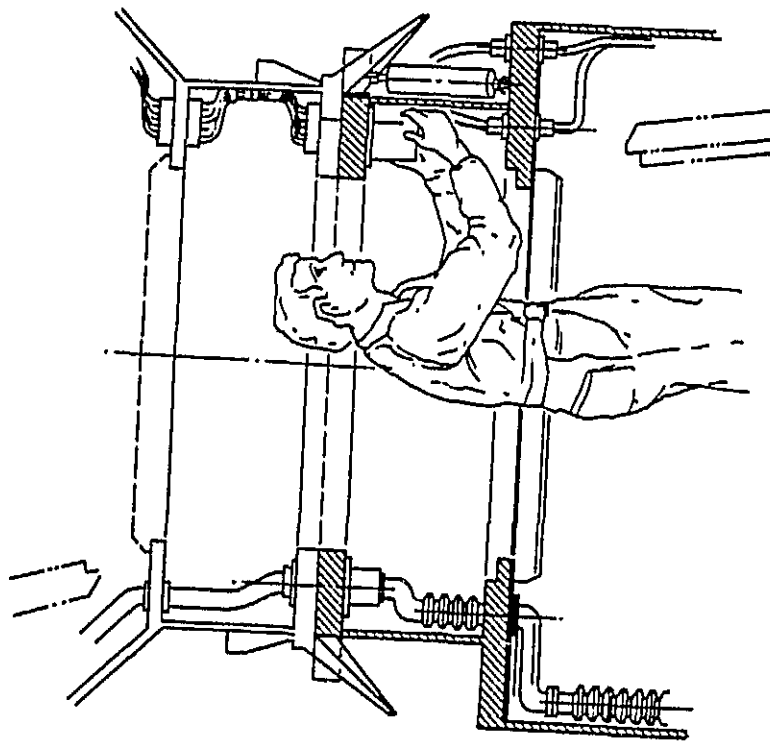
Rockwell International

Space Operations and
Satellite Systems Division
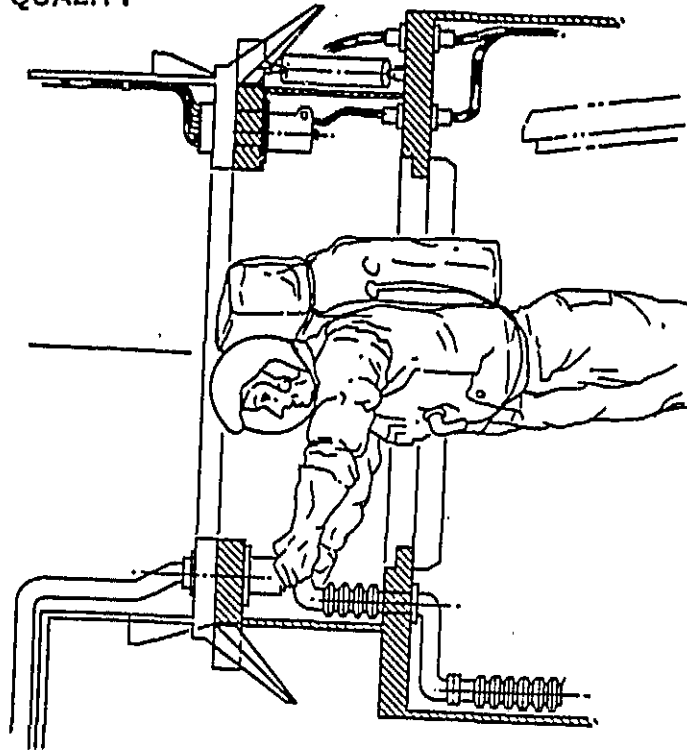
40

UTILITIES INTERFACE ACCESS

To investigate the issue of accessibility for utilities maintenance, we have completed a preliminary layout that confirmed that all utility interfaces are accessible. This conclusion applies to nominal maintenance operations by a shirt-sleeve astronaut and to contingency maintenance operations by a pressure suited astronaut. Two features of the docking module design contributed to the accessibility situation considerably, the placement of the attenuators outside the pressure volume which kept them close to the main load path, and the outward pointing guide petals. Inward pointing guide petals were considered but were not selected because they were not as amenable to maintenance accessibility as the outward pointing guide petals.
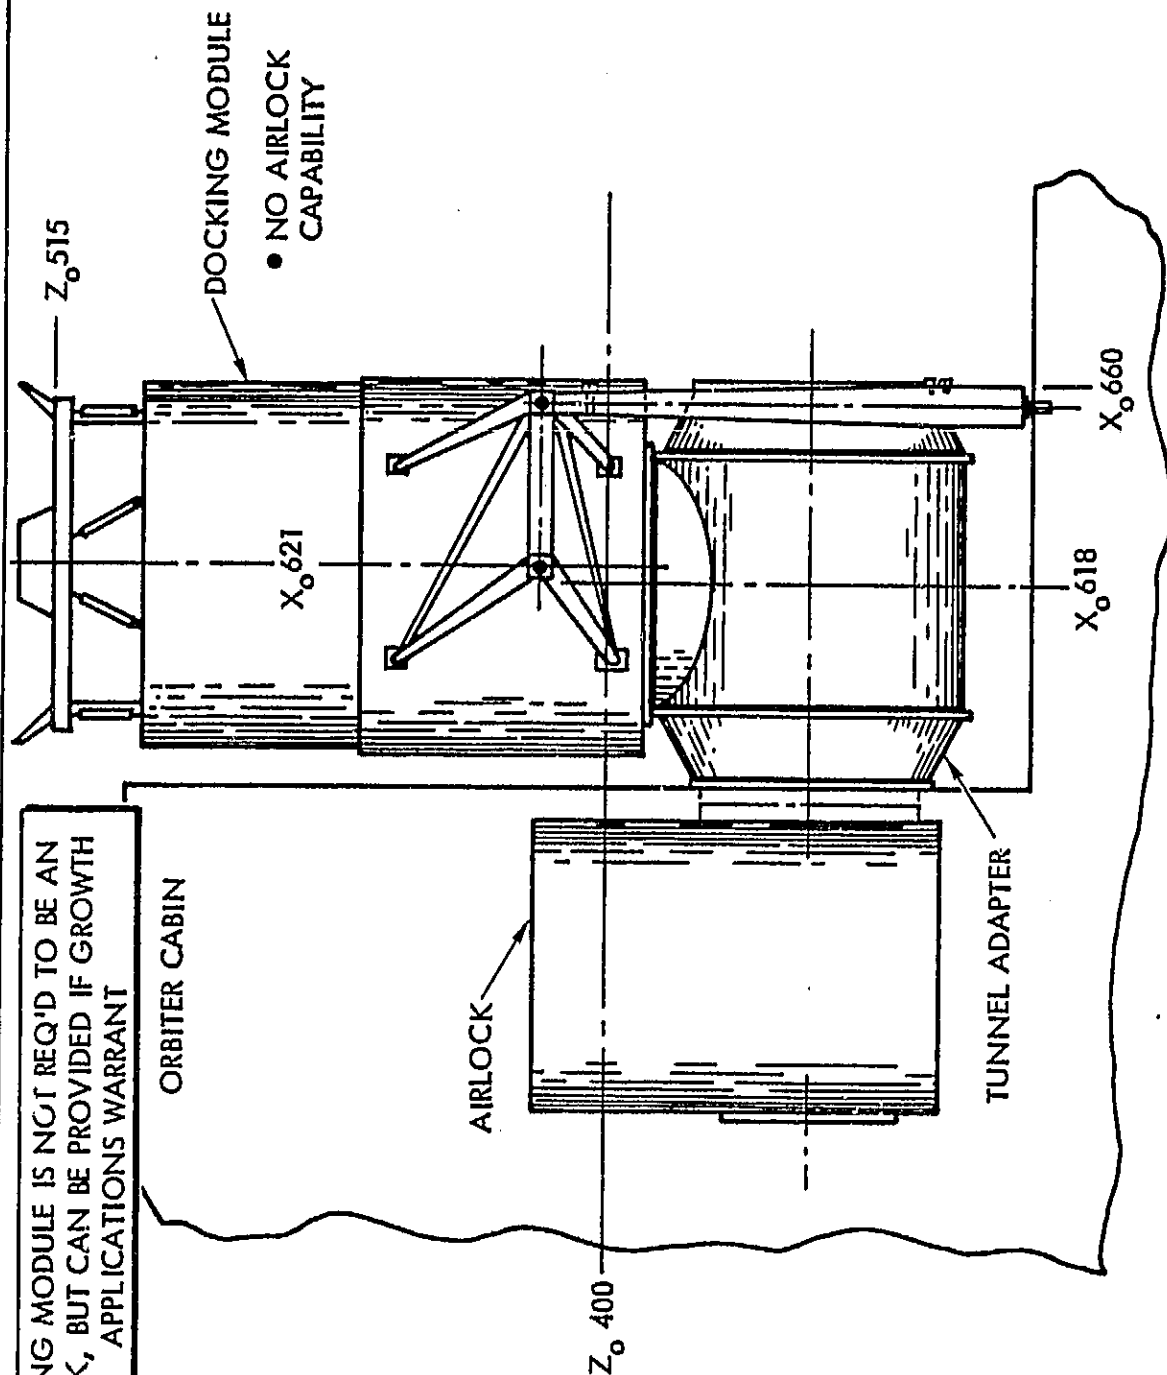
UTILITIES INTERFACE ACCESS

CONTINGENCY MAINTENANCE

NOMINAL MAINTENANCE

80SSD10671

41

NOMINAL ORBITER ARRANGEMENT CONCEPT

80SD10696

$Z_o 515$

DOCKING MODULE

• NO AIRLOCK
  CAPABILITY

$X_o 621$

$X_o 660$

$X_o 618$

DOCKING MODULE IS NOT REQ'D TO BE AN
AIRLOCK, BUT CAN BE PROVIDED IF GROWTH
APPLICATIONS WARRANT

ORBITER CABIN

AIRLOCK

TUNNEL ADAPTER

$Z_o 400$

Rockwell
International

Space Operations and
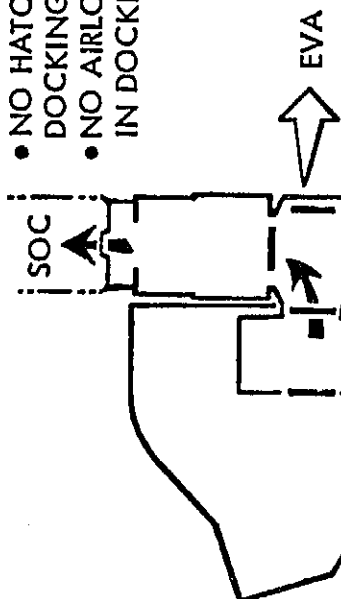Satellite Systems Division

42.

EVA OPTIONS

This chart illustrates that the proposed docking module concept, if provided with an airlock capability, can provide EVA passage with any combination of payloads.
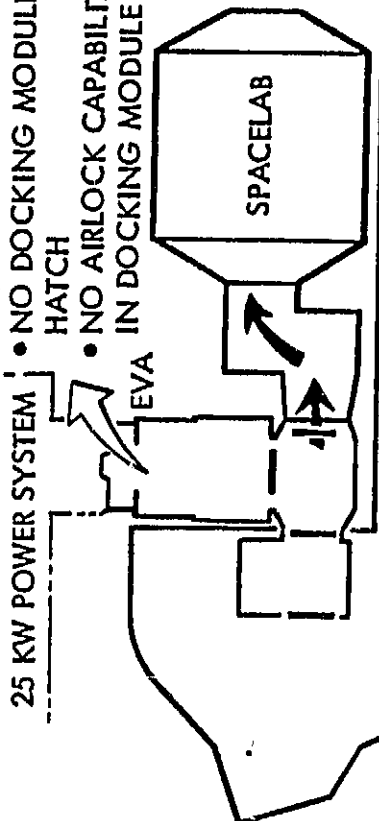
EVA OPTIONS

- PRESSURIZED PASSAGE ONLY
- NO HATCHES IN DOCKING MODULE
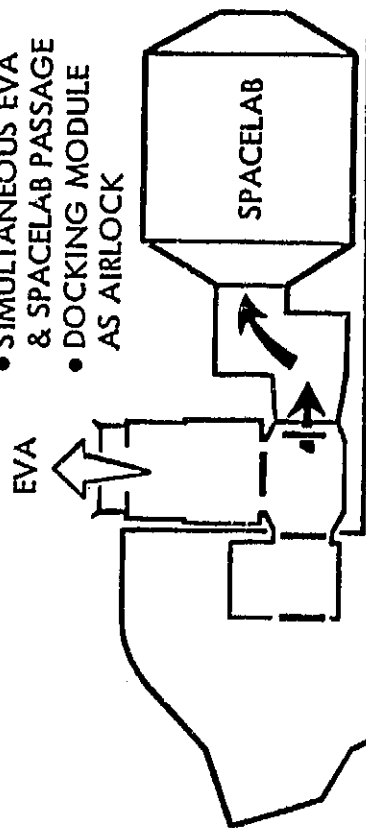- NO AIRLOCK CAPABILITY IN DOCKING MODULE

SOC

EVA

SOC OPERATIONS

- SIMULTANEOUS EVA & SPACELAB PASSAGE
- DOCKING MODULE AS AIRLOCK

EVA

SPACELAB

SPACELAB OPERATIONS

- POWER AUGMENTATION INTERFACES
- NO DOCKING MODULE HATCH
- NO AIRLOCK CAPABILITY IN DOCKING MODULE

25 KW POWER SYSTEM

EVA

SPACELAB
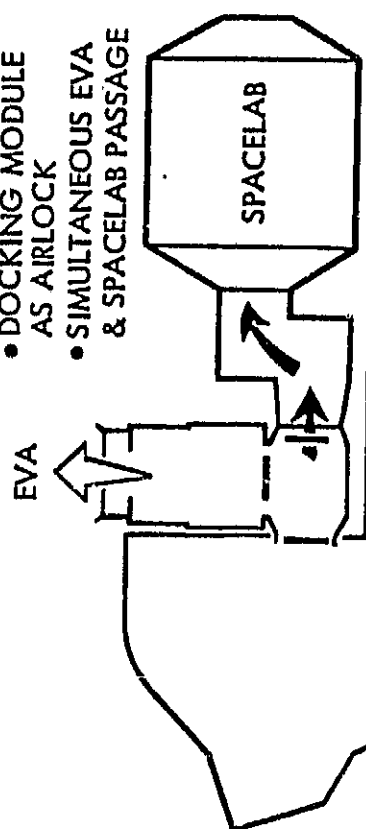
POWER SYSTEM OPERATIONS

- NO INTERNAL AIRLOCK
- DOCKING MODULE AS AIRLOCK
- SIMULTANEOUS EVA & SPACELAB PASSAGE

EVA

SPACELAB

SPACELAB OPERATIONS

80SSD10776

Rockwell International

Space Operations and
Satellite Systems Division

43

EVA DESIGN IMPLICATIONS FOR UNMANNED SYSTEMS

80SSD10669

Rockwell
International

Space Operations and
Satellite Systems Division

44

ALTERNATIVE DOCKING SYSTEM FOR UNMANNED OPERATIONS

DOCKING MODULE CONCEPT CAPABILITY

$Z_o 515$

$Z_o 457$

BERTHING
ADAPTER

SUPPORT
STRUCTURE

$X_o 618$

$X_o 660$

POWER SYSTEM REFERENCE CONFIGURATION

REMOTE CONTROLLED
UMBILICAL PLATE
FOR PS TO ORBITER
FLUID & AVIONICS INTERFACES

BERTHING ADAPTER
EXTENDED

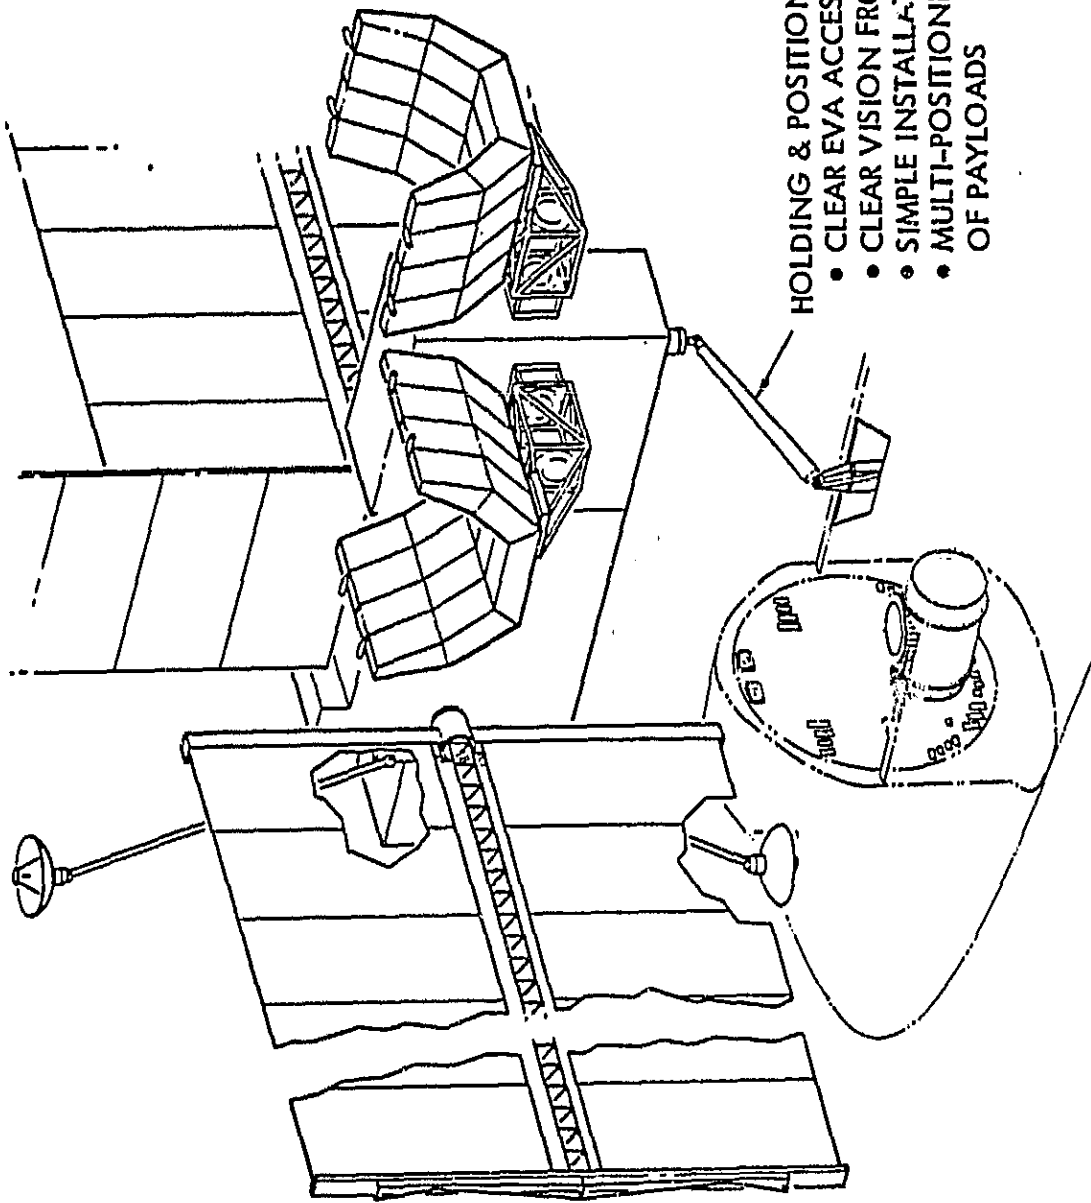$Z_o 515$

BERTHING
ADAPTER
LAUNCH

$Z_o 457$

AIRLOCK

SPACELAB
TUNNEL

LAUNCH SUPPORT

ORBITER

AIRLOCK
HATCH

LAUNCH
SUPPORT (4)

$X_o 618$

80SD10819

Rockwell
International

Space Operations and
Satellite Systems Division

45

RECOMMENDED ALTERNATIVE CONCEPT FOR UNMANNED PAYLOADS

HOLDING & POSITIONING AID
- CLEAR EVA ACCESS
- CLEAR VISION FROM AFT WINDOWS
- SIMPLE INSTALLATION OF HAPA
- MULTI-POSITIONING/ORIENTATION
  OF PAYLOADS

80SSD10674

Rockwell International

Space Operations and
Satellite Systems Division

46

CONFIGURATION SUMMARY

UNMANNED OPERATIONS

HOLDING
AND
POSITIONING
AID

MANNED OPERATIONS

DOCKING
MODULE

80SSD10576

Rockwell
International

Space Operations and
Satellite Systems Division

47

DOCKING MODULE PRELIMINARY REQUIREMENTS

As a consequence of the SOC/Shuttle Interaction study and Rockwell's participation in the Docking/Berthing Working Group, we have generated a set of preliminary design requirements for a standardized docking module. These requirements were submitted to the NASA Docking/Berthing Working Group and are presently being reviewed.

DOCKING MODULE PRELIMINARY REQUIREMENTS

• UTILITIES INTERFACES

o ALL UTILITIES INTERFACES SHALL BE LOCATED WITHIN THE PRESSURE SEALED INTERFACE AND WILL BE REMOTELY ACTIVATED.

o ALL OF THE UTILITIES INTERFACES WILL BE ACCESSIBLE TO THE CREW FROM WITHIN THE PRESSURIZED ENVIRONMENT.

o ANY SERVI AREA WILL

o THE UTILI ARE TBD.

o THE LOCAT ARE TBD.

• EXTENSION DEVICE

o EXTENSION TUNNEL AND DOCKING MECHANISM WHEN RETRACTED WILL PROVIDE EVA CLEARANCE WITH THE PAYLOAD DOORS CLOSED (MINIMUM CLEARANCE 16" FROM DOCKING INTERFACE -Zo 457).

o EXTENSION TUNNEL WITH DOCKING MECHANISM WILL EXTEND 15" BEYOND ORBITER MOLDLINE (DOCKING INTERFACE AT Zo 515).

o THE FIXED STRUCTURE OF THE EXTENSION DEVICE WILL BE SUPPORTED FROM THE ORBITER PAYLOAD BAY LONGERON BRIDGE STRUCTURE AND CENTERLINE KEEL STRUCTURE.

o ACCOMMODATION OF C

o A FLEXIBLE, PRESSU AND THE TUNNEL ADA TUNNEL ADAPTER.

o ONE HINGED HATCH \ TUNNEL.

o AN EMERGENCY SEPAI DOOR CLOSURE IS PC CABIN PRESSURE, OR

o AIRLOCK CAPABILITY CONFIGURATION.

o A MINIMUM CLEAR PA OR EXTENDED ARRANG

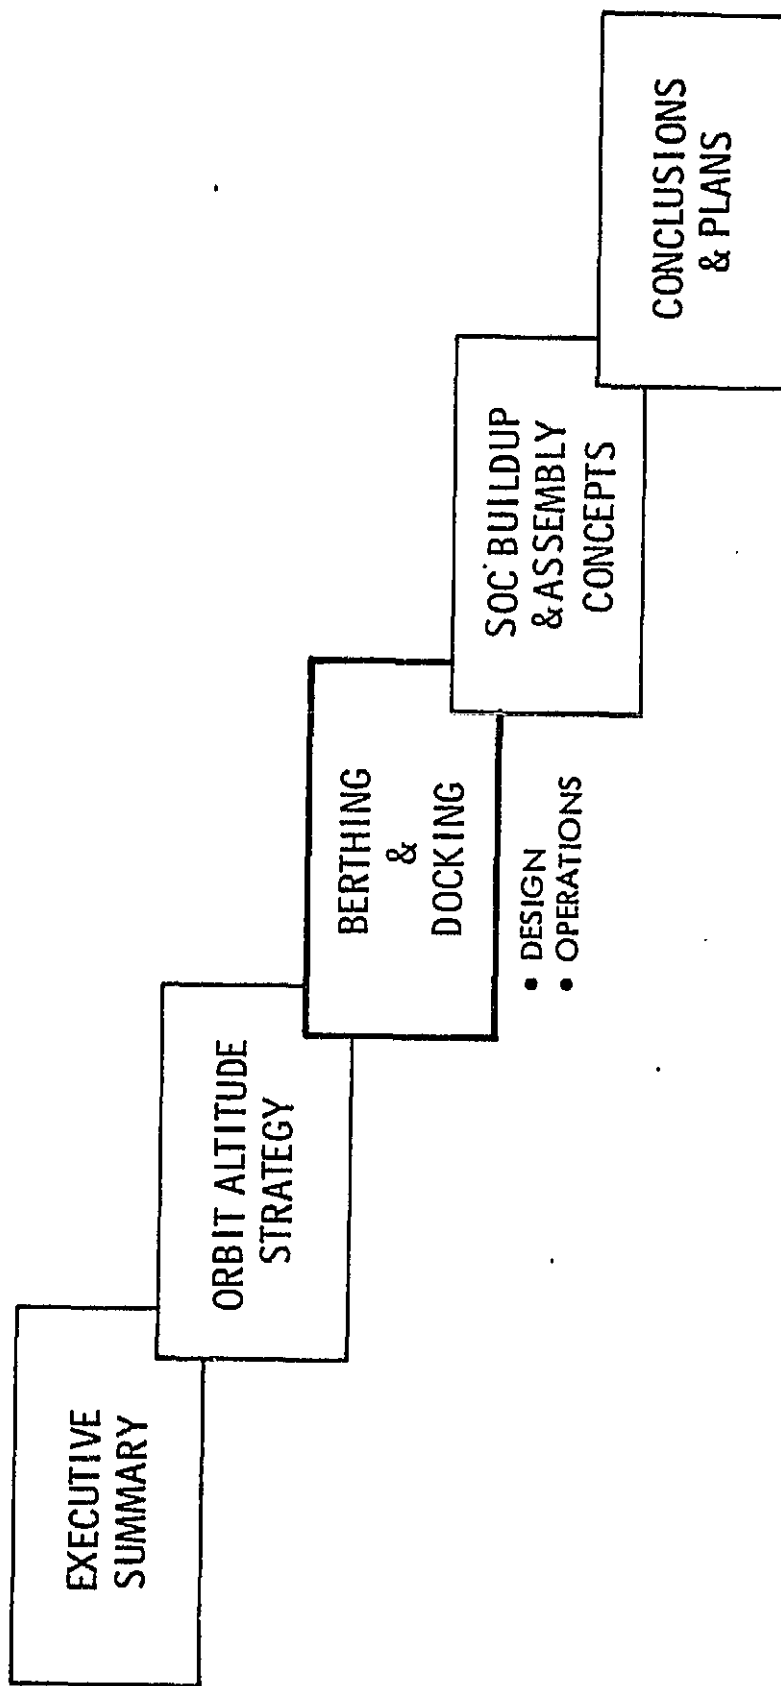o THE EXTENSION DEVI AND Xo 660.

• DOCKING MECHANISM

o THE DOCKING MECHANISM SYSTEM SHALL BE ANDROGYNOUS AND ALLOW DOCKING AT 90° ALIGNMENT INCREMENTS.

o ALL DOCKING SYSTEM HARDWARE EXCEPT THE ATTENUATORS SHALL BE LOCATED WITHIN THE PRESSURE SEALED INTERFACE AND BE ACCESSIBLE TO THE CREW FROM WITHIN THE PRESSURIZED ENVIRONMENT. THE IMPACT ATTENUATORS WILL BE LOCATED OUTSIDE OF THE PRESSURIZED INTERFACE AREA.

o A 1M CLEAR OPENING WILL BE MAINTAINED THROUGH THE DOCKING MECHANISM AT ALL TIMES.

o THE GUIDE PETALS WILL BE ORIENTED ALONG THE ORBITER COORDINATE AXIS.

o DOCKING - DESIGN IMPACT CONDITIONS

AXIAL CLOSING VELOCITY	—	0.05 - 0.50 FT/SEC
LATERAL VELOCITY	—	<0.2 FT/SEC
ANGULAR VELOCITY	—	1.0 DEG/SEC (About any axle)
LATERAL MISALIGNMENT	—	.75 FT
ANGULAR MISALIGNMENT	—	<5.0 DEG ROLL
		<6.0 DEG PITCH/YAW

o THE DOCKING MECHANISM WILL BE CAPABLE OF PERFORMING ACTIVE OR PASSIVE DOCKING/BERTHING.

SUMMARY

- DOCKING MODULE IS DESIGNED FOR EASY CHANGEOUT

- DOCKING MECHANISM IS DESIGNED FOR UNIVERSAL USAGE

- ADEQUATE AREA IS AVAILABLE FOR UTILITIES INTERFACES WITH GOOD ACCESS FOR MAINTENANCE/INSPECTION

- DOCKING MODULE DESIGN DOES NOT PRECLUDE THE INSTALLATION OF AIRLOCK CAPABILITY -- IF DESIREABLE

- STATUS OF MCR AND 25 KW POWER SYSTEM PROGRAMS DEMANDS EARLY DEFINITION OF REQUIREMENTS AND STANDARDIZATION

- WITH DOCKING MODULE AND HOLDING AND POSITIONING AID, THE ORBITER CAN DO ALL FORSEEABLE BERTHING/DOCKING AND SOC BUILD-UP OPERATIONS

BRIEFING OUTLINE

EXECUTIVE
SUMMARY

ORBIT ALTITUDE
STRATEGY

BERTHING
&
DOCKING

- DESIGN
- OPERATIONS

SOC BUILDUP
& ASSEMBLY
CONCEPTS

CONCLUSIONS
& PLANS

Space Operations and
Satellite Systems Division

Rockwell
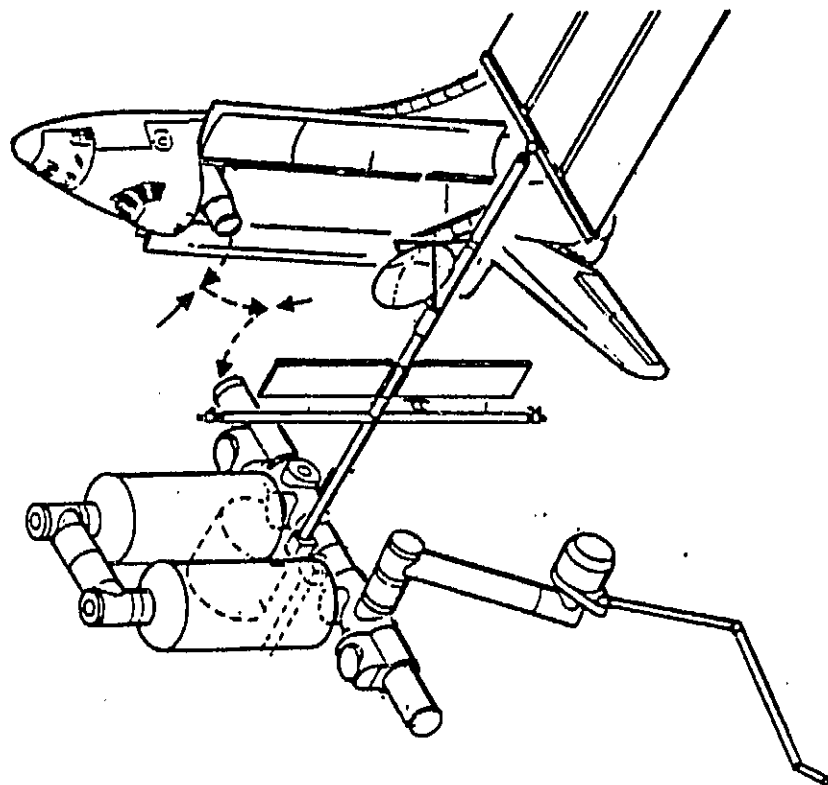International
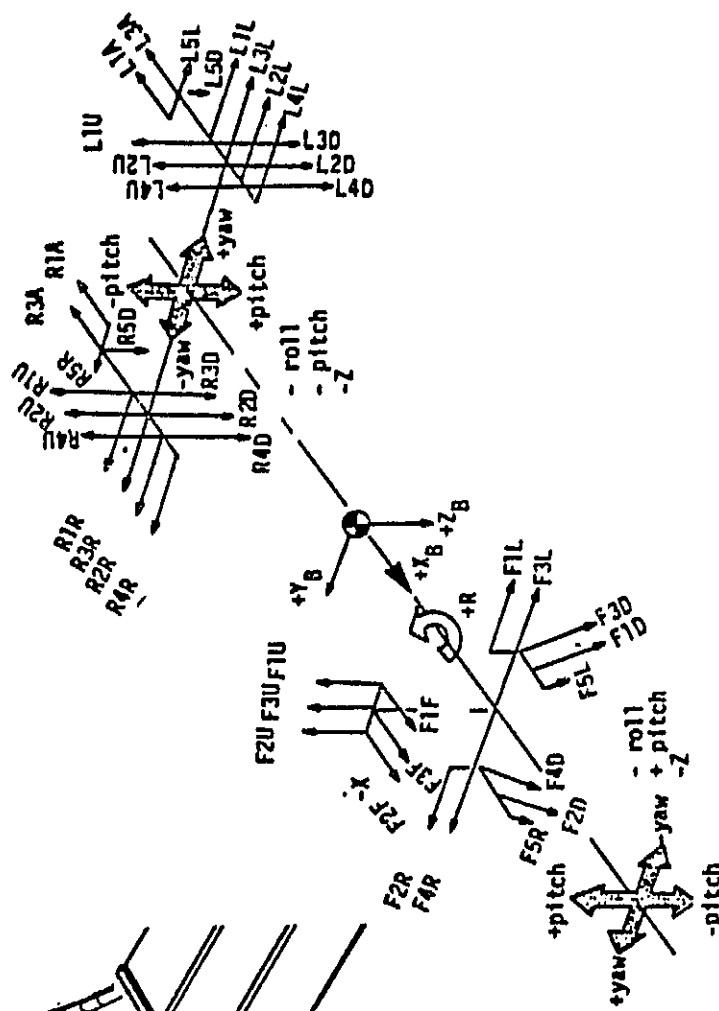
50

80SD10834

ORBITER DOCKING TRAJECTORY CONTROL

One of the main considerations in the berthing and docking task is the ability of the orbiter to safely perform the terminal closure trajectory leading to direct docking or RMS aided berthing of the orbiter to SOC. There are a number of complicating factors which can affect the degree of precision attainable for these proximity operations. The most notable of these are: the complex RCS thruster geometry on the orbiter which produces highly coupled motions, the relatively large minimum impulse bit size (65 ± 8 lb sec.) governed mainly by the orbiter digital auto-pilot sampling rate ($12 \, H_z$) and the coupling of these factors with orbit mechanics effects to degrade the precision of trajectory control.

However, in spite of these complexities, preliminary analyses with simplified models have indicated that the orbiter can dock with the Space Operations Center. The closing process is sufficiently slow that needed corrective impulses can be introduced to meet the docking contact conditions under normal operations. There are potential safety problems associated with non-normal situations such as a jet failure which require further attention.
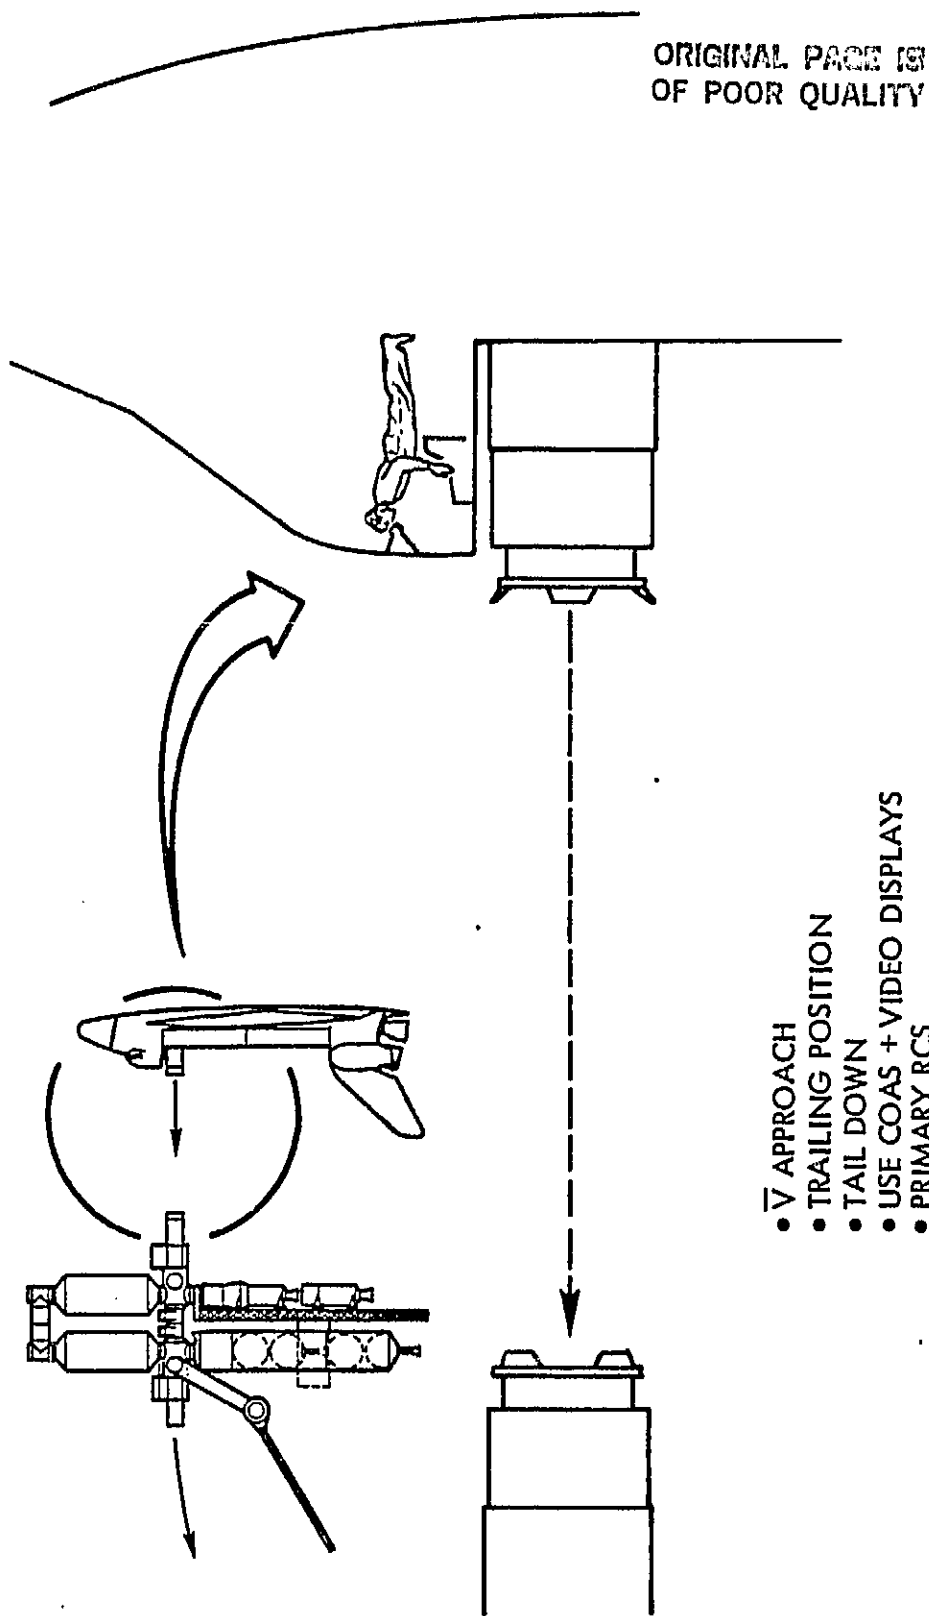
ORBITER DOCKING TRAJECTORY CONTROL
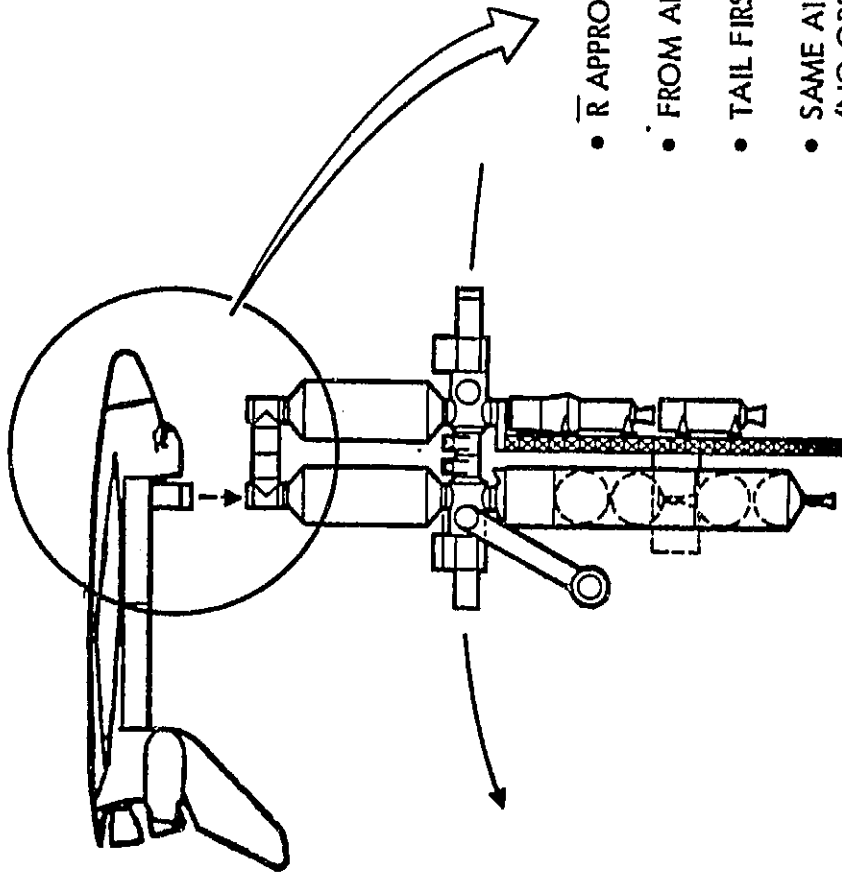
80SSD10797

ORBITER CAN DOCK
WITH SOC*

* WITH QUALIFICATIONS

Satellite Systems Division
Space Systems Group

Rockwell
International

51

ORBITER/SOC NOMINAL DOCKING SCENARIO

ORIGINAL PAGE IS
OF POOR QUALITY

- $\bar{V}$ APPROACH
- TRAILING POSITION
- TAIL DOWN
- USE COAS + VIDEO DISPLAYS
- PRIMARY RCS
- LVH ROTATIONAL MODE
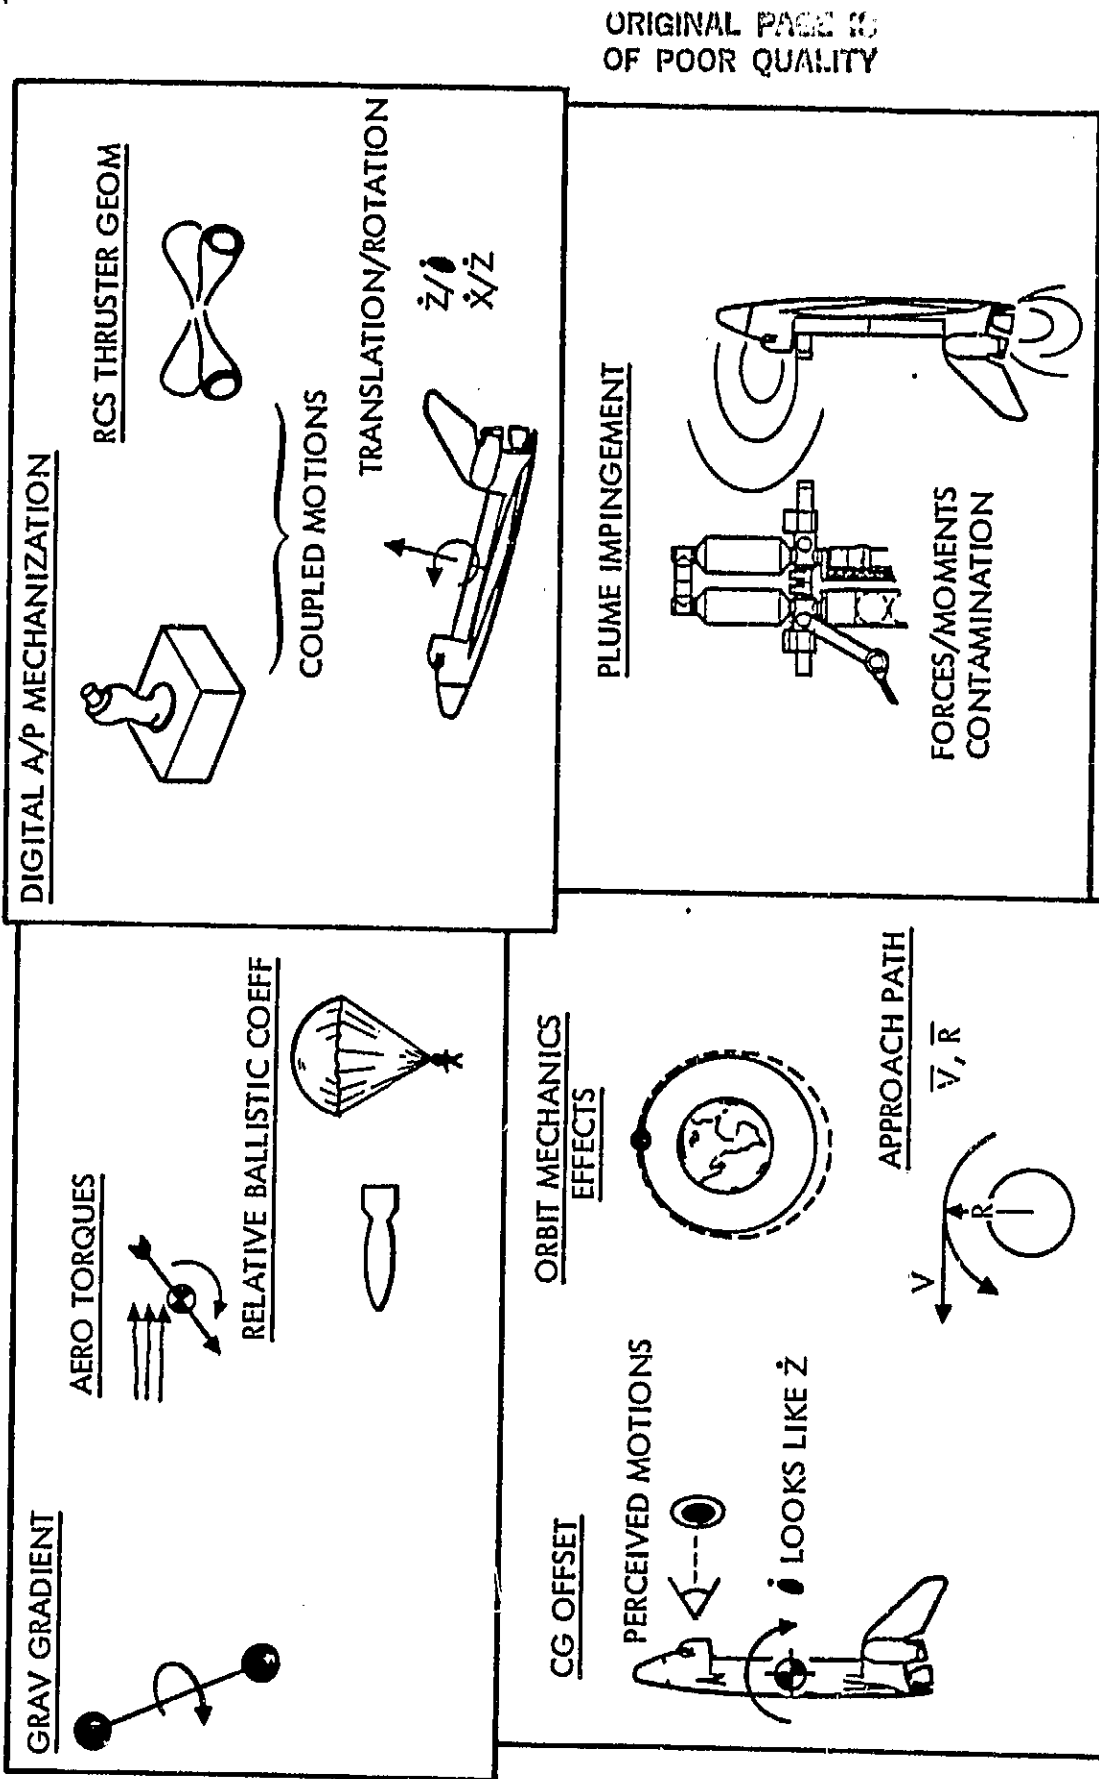- ACCELERATION & PULSE TRANSLATIONAL MODES

ALTERNATE /EMERGENCY DOCKING SCENARIO
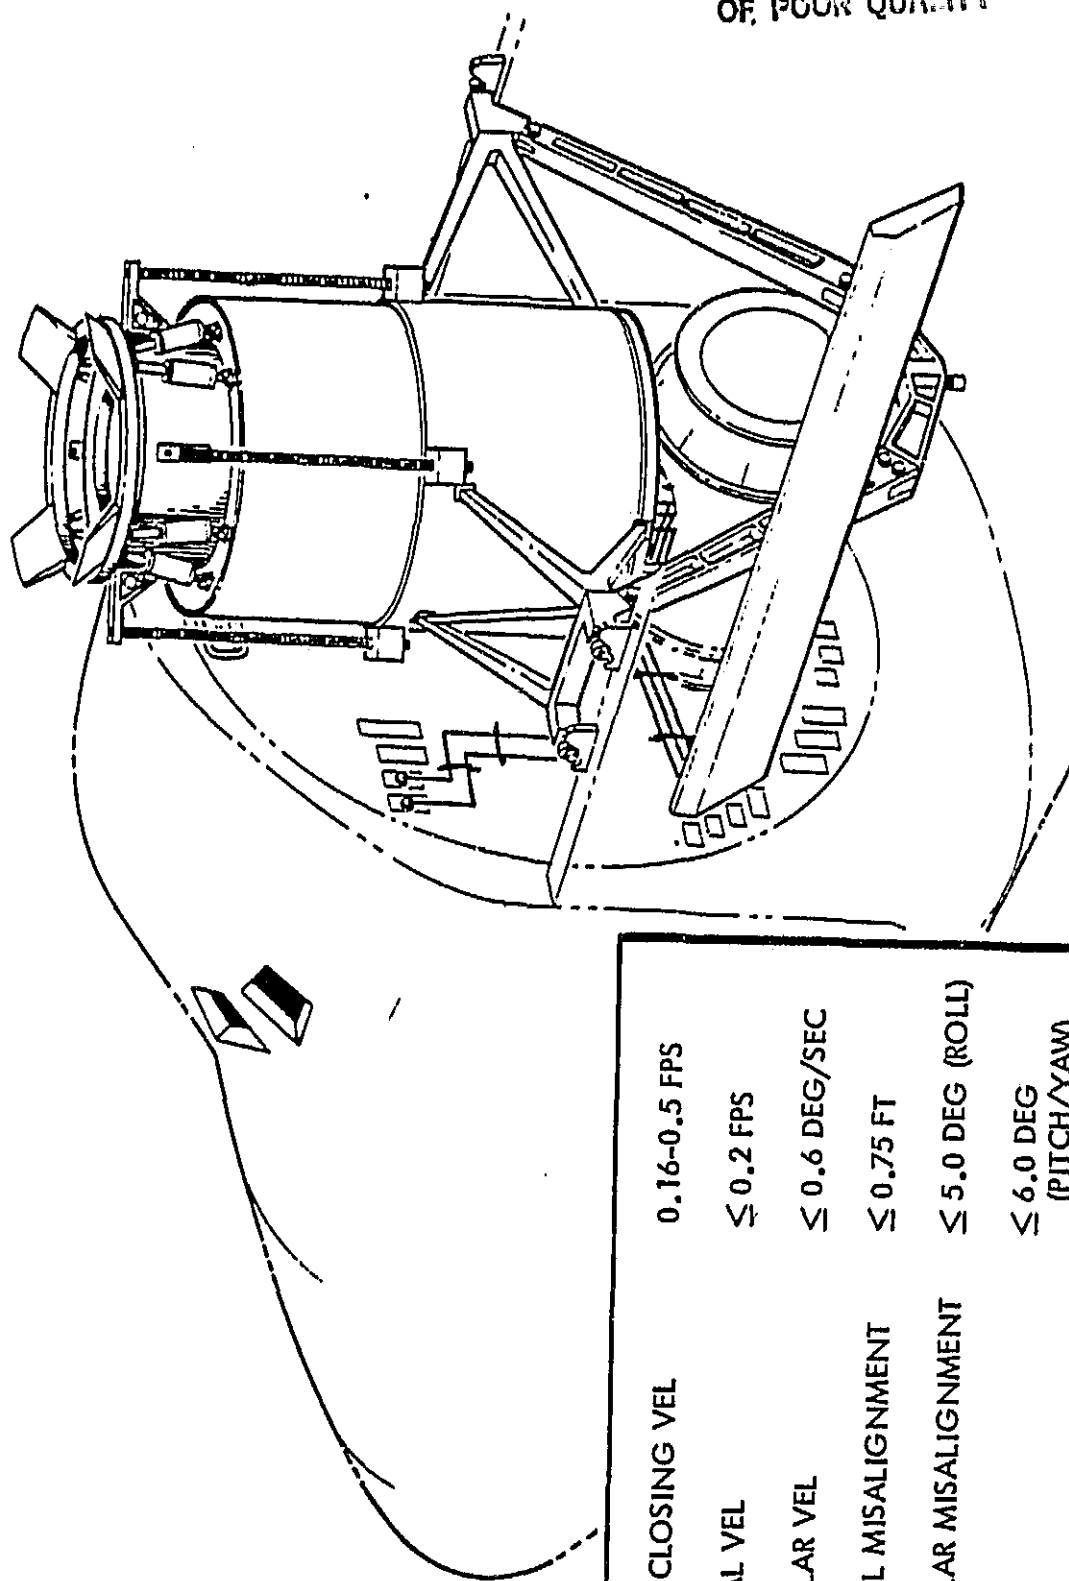

- $\overline{R}$ APPROACH

- FROM ABOVE

- TAIL FIRST & MAYBE OTHER ATTITUDES

- SAME AIDS & CONTROL MODES AS NOMINAL (NO ORBITER MODS)

- $\overline{R}$ MODIFIES ORBIT MECHANICS EFFECTS

- ADDITIONAL CREW TRAINING REQD

80SD10835

Space Operations and
Satellite Systems Division

Rockwell
International

53

PROXIMITY OPERATIONS FACTORS

DIGITAL A/P MECHANIZATION

RCS THRUSTER GEOM

COUPLED MOTIONS

TRANSLATION/ROTATION

$\dot{Z}/\theta$
$\dot{X}/\dot{Z}$

PLUME IMPINGEMENT

FORCES/MOMENTS
CONTAMINATION

GRAV GRADIENT

AERO TORQUES

RELATIVE BALLISTIC COEFF

CG OFFSET

ORBIT MECHANICS
EFFECTS

PERCEIVED MOTIONS

θ LOOKS LIKE $\dot{Z}$

APPROACH PATH
$\bar{V}, \bar{R}$

V
R

80SD10799

Space Operations and
Satellite Systems Division

Rockwell
International

54

PRELIMINARY DOCKING REQUIREMENTS

AXIAL CLOSING VEL	0.16-0.5 FPS
LATERAL VEL	$\leq$ 0.2 FPS
ANGULAR VEL	$\leq$ 0.6 DEG/SEC
LATERAL MISALIGNMENT	$\leq$ 0.75 FT
ANGULAR MISALIGNMENT	$\leq$ 5.0 DEG (ROLL)
	$\leq$ 6.0 DEG (PITCH/YAW)

80SSD10800

Rockwell International

Space Operations and
Satellite Systems Division

55

EXAMPLE DOCKING TRAJECTORY

This is an example printout from a series of closing trajectory runs made on a simplified relative motion simulation program. This simulation program includes the orbit mechanics effects on relative motion trajectories, the effects of the gravity/aero torque environments and the orbiter digital autopilot/thruster geometry characteristics affecting the precision of trajectory control. This simulation does not contain man-in-the-loop features, but does allow meaningful analyses of closing path sensitivities to approach direction (V-bar, R-bar, etc.), orbiter attitude, and the effects of ΔV errors caused by minimum impulse bit size limits. The case shown here was for plus ΔV errors in both X and Z directions (80 millisecond longer RCS burns than required for the ideal closure maneuver). The miss distance for this case is shown to be 20.6 inches.

A number of other cases were analyzed with different combinations of plus and minus ΔV errors and covering different closing geometries. The results of some of these additional simulation runs are summarized in the chart on the following page.

The main conclusion from this analysis is that the orbiter can be flown to successful docking contact conditions, but that "close in" ΔV adjustments, mostly in X and Y direction will be required. Also, the character and number of these corrective impulses will be affected by the closing geometry such as V-bar, R-bar, etc. and the orbiter attitude, tail up or down...or X-POP, etc.

EXAMPLE DOCKING TRAJECTORY

CASE 2.1.1
TAIL DOWN
$\overline{V}$ APPROACH
$Z_{INITIAL} = 30$ FT
T_Z & $T_X = +0.080$ SEC

MISS DISTANCE
20.6 INCHES

80SSD10801

Rockwell
International

Space Operations and
Satellite Systems Division

56

80SSD10802

EXAMPLE DOCKING RESULTS

BASIC CONDITIONS: 30 FT, PLUS $\bar{V}$, TAIL DOWN, 1.8 MINUTE APPROACH PATH
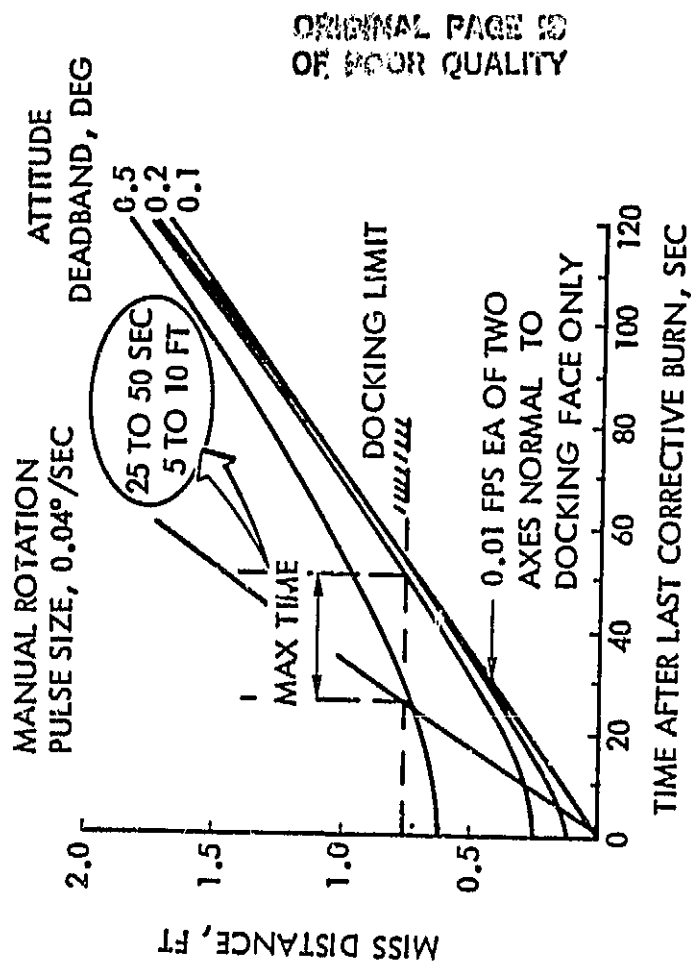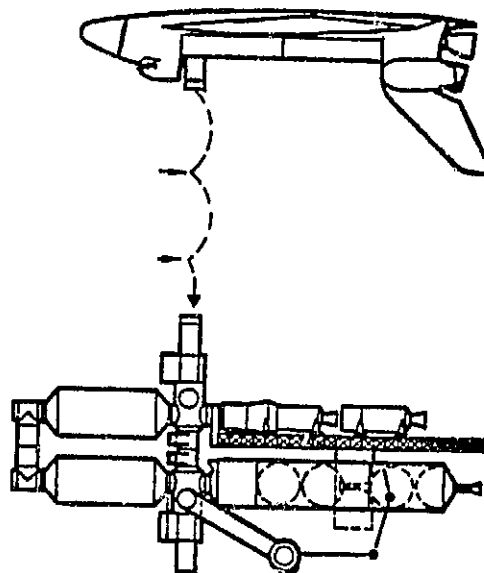IDEAL ΔV's ARE $\Delta V_{\bar{V}} = 0.2098$ FPS, $\Delta V_{\bar{R}} = 0.0258$ FPS

| | FIRING TIME (SEC) | | FUEL USED (LB) | DOCK TIME (SEC) | V_z (FT/SEC) | $\sqrt{V_x^2+V_y^2}$ (FT/SEC) | $\sqrt{\dot{\theta}_y^2+\dot{\theta}_x^2+\dot{\theta}_z^2}$ (DEG/SEC) | DOCKING PARAMETERS WRT SOC BODY AXES CENTERED ON DOCK PORT | | | |
CASE	$-X_b$	$-Z_b$						$\sqrt{X^2+Y^2}$ (IN.)	$|\theta_x|$ (DEG)	$|\theta_y|$ (DEG)	$|\theta_z|$ (DEG)
2.1.1	$T_f+.08$	$T_f+.08$	14.0	90.3	.329	.020	.030	20.8	.31	2.66	.01
2.1.2	$T_f+.08$	$T_f+.08$	14.7	95.7	.289	.030	.030	12.7	.34	.72	.00
2.1.3	$T_f+.08$	$T_f+.08$	13.0	111.0	.274	.003	.058	7.0	.46	7.07	.01
2.2.1	$T_f-.08$	$T_f+.08$	13.0	88.6	.331	.059	.045	14.3	.30	3.88	.01
2.2.2	$T_f-.08$	$T_f+.08$	13.7	92.4	.300	.070	.017	23.1	.33	2.20	.02
2.2.3	$T_f-.08$	$T_f+.08$	12.0	105.5	.285	.044	.044	48.4	.43	4.73	.02
2.3.1	$T_f-.08$	$T_f-.08$	10.0	109.7	.268	.037	.051	10.7	.24	5.55	.01
2.3.2	$T_f-.08$	$T_f-.08$	10.7	119.0	.230	.046	.010	4.8	.20	2.51	.02
2.3.3	$T_f-.08$	$T_f-.08$	9.0	138.4	.217	.004	.036	31.0	.41	5.25	.01
2.4.1	$T_f+.08$	$T_f-.08$	11.0	113.6	.268	.004	.037	54.6	.27	4.38	.01
2.4.2	$T_f+.08$	$T_f-.08$	11.7	119.0	.228	.056	.010	19.4	.23	2.50	.01
2.4.3	$T_f+.08$	$T_f-.08$	12.0	107.1	.207	.016	.050	25.7	.44	7.66	.01
2.5.1	$T_f+.08$	$T_f+.08$	13.7	91.6	.326	.029	.028	10.2	.24	2.49	.01
2.5.2	$T_f+.08$	$T_f+.08$	14.5	96.5	.287	.039	.039	1.8	.28	.50	.01
2.5.3	$T_f+.08$	$T_f+.08$	12.7	111.4	.273	.011	.060	19.3	.38	6.78	.01
2.6.1	$T_f-.08$	$T_f+.08$	13.2	91.0	.327	.049	.035	7.7	.24	3.19	.01
2.6.2	$T_f-.08$	$T_f+.08$	14.0	94.8	.291	.039	.025	18.5	.26	1.24	.01
2.6.3	$T_f-.08$	$T_f+.08$	7.0	108.3	.280	.032	.053	40.4	.32	5.82	.00
2.7.1	$T_f-.08$	$T_f-.08$	10.3	112.5	.266	.028	.043	19.8	.19	4.79	.01
2.7.2	$T_f-.08$	$T_f-.08$	11.0	121.5	.226	.036	.017	4.9	.23	1.55	.01
2.7.3	$T_f-.08$	$T_f-.08$	9.3	142.3	.213	.014	.044	19.2	.35	6.46	.01
2.8.1	$T_f+.09$	$T_f-.08$	10.8	114.3	.266	.008	.036	42.1	.19	3.98	.01
2.8.2	$T_f+.8$	$T_f-.8$	11.5	124.2	.223	.016	.024	28.6	.25	.61	.00
2.8.3	$T_f+.08$	$T_f-.08$	10.8	147.0	.207	.007	.051	9.6	.35	7.72	.01

Space Operations and
Satellite Systems Division

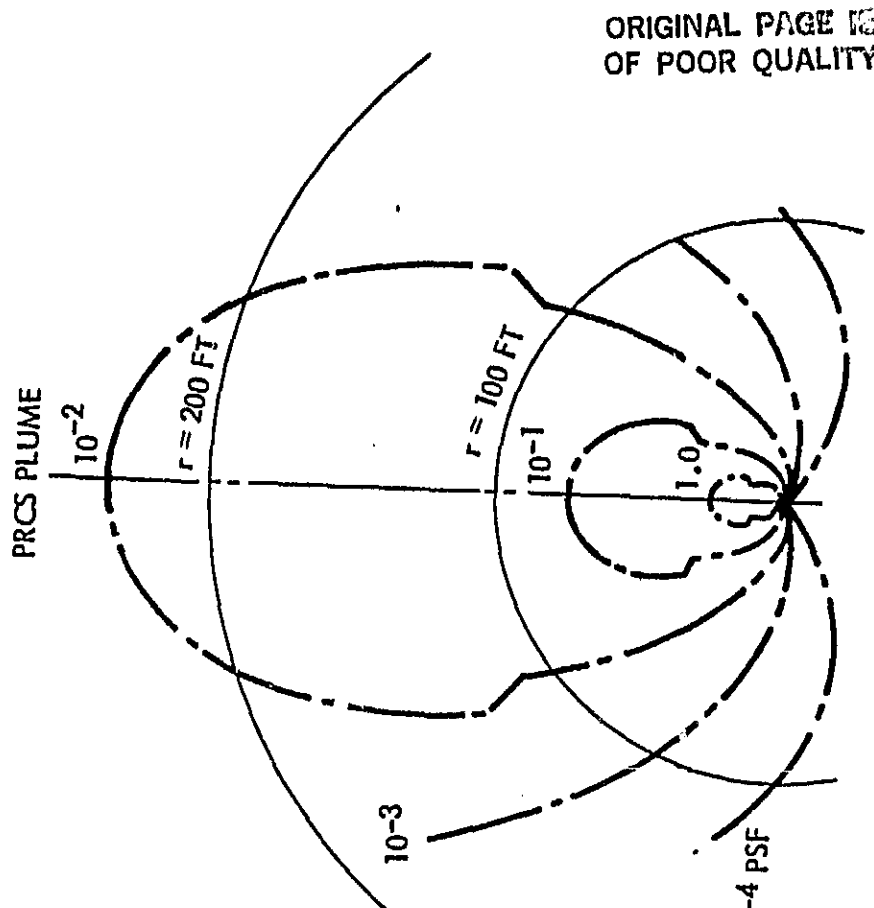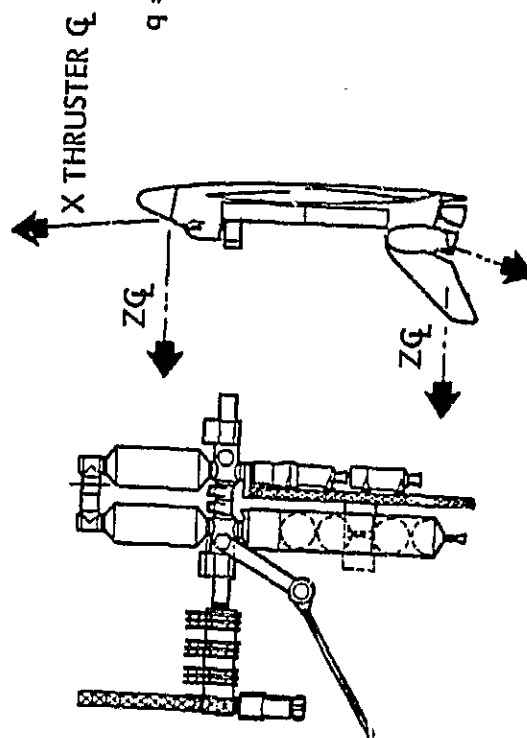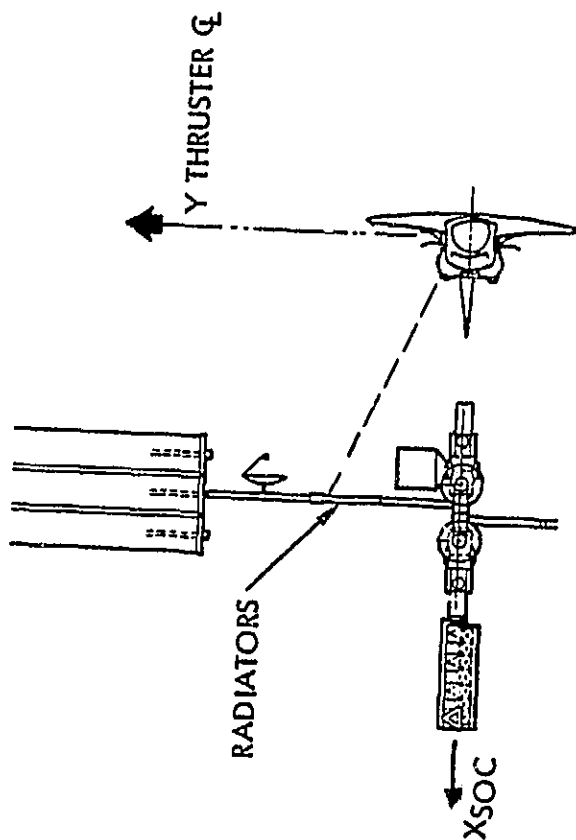**Rockwell International**

57

DOCKING TRAJECTORY ACCURACY

"ORBITER CAN DO THE JOB"

- PROXIMITY RCS FIRING REQUIRED

- MOSTLY X_B & Y_B CORRECTIONS..... WITH SOME ROTATIONAL HOLD ATTITUDE FIRINGS

Graph:

ATTITUDE DEADBAND, DEG
- 0.5
- 0.2
- 0.1

MANUAL ROTATION PULSE SIZE, 0.04°/SEC

25 TO 50 SEC
5 TO 10 FT

MAX TIME

DOCKING LIMIT

0.01 FPS EA OF TWO AXES NORMAL TO DOCKING FACE ONLY

Y-axis: MISS DISTANCE, FT (2.0, 1.5, 1.0, 0.5)

X-axis: TIME AFTER LAST CORRECTIVE BURN, SEC (0, 20, 40, 60, 80, 100, 120)

RCS PLUME IMPLICATIONS

80SSD10805

PRCS PLUME

10^{-2}

$r = 200$ FT

$r = 100$ FT

10^{-1}

10^{-3}

1.0

$q = 10^{-4}$ PSF

- X & Y THRUSTING PRODUCE MINIMAL EFFECTS
- NEGLIGIBLE Z THRUSTING EXPECTED (NOMINAL APPROACHES)

Y THRUSTER ₵

X THRUSTER ₵

Z ₵

Z ₵

RADIATORS

X_{SOC}

Rockwell International

Space Operations and
Satellite Systems Division

59

JSC TERMINAL CLOSURE SIMULATION RESULTS

The only terminal closure simulations involving man-in-the-loop with high fidelity orbiter flight control characteristics were conducted by JSC in support of LDEF retrieval investigations. The objectives of this simulation activity are summarized on the accompanying chart along with some of the conclusions judged to be pertinent to the current SOC study. The results identified problem sensitivities to approach path and orbiter attitudes similar to those described from recent studies in the preceding charts. However, piloting techniques were developed which indicated the capability to fly up to and stationkeep with a co-orbiting target vehicle to within 0.03 fps relative velocity in all axes. This is well within the docking contact velocity envelope specified for SOC and thus confirms the belief that the orbiter can successfully dock with the Space Operations Center under normal conditions.

JSC TERMINAL CLOSURE SIMULATION RESULTS

STUDY APPROACH PATH OPTIONS TO LDEF, JSC - 12776, NOV 7, 1977

OBJECTIVES:

- ORBITER CAPABILITY TO APPROACH & STATIONKEEP WITH PLUME SENSITIVE P/L

- ESTABLISH PERFORMANCE DATA BASE FOR VARIOUS APPROACH TECHNIQUES

RESULTS:

- $\bar{R}$ & $\bar{V}$ APPROACHES OFFER OPERATIONAL ADVANTAGES

- $\bar{H}$ APPROACHES ARE CONDITIONALLY FEASIBLE

- ALL APPROACH MODES SHOULD BE CONSIDERED

- PILOTS CONSISTANTLY MAINTAINED STATIONKEEPING WITHIN 0.03 FPS ALL AXES

- SPECIAL TECHNIQUES CAN GREATLY REDUCE PLUME EFFECTS $\pm$X PRCS ("LOW Z") BRAKING

- FORE & AFT CCTV's ARE VALUABLE AIDS FOR FINAL CLOSURE

A TOTAL OF 20 CONCLUSIONS & RECOMMENDATIONS ON TECHNIQUES, TRENDS, & SENSITIVITIES RELATIVE TO PLUME EFFECTS & FUEL CONSUMPTION

THE PROBLEM IS A RUNAWAY JET FAILURE

POTENTIAL CRITICAL REGION
- MISS DOCKING ENVELOPE
- RECOVERY DIFFICULT
- ORBITER – SOC
  CONTACT LIKELY

ANALOGOUS TO
HELICOPTER CRITICAL FLIGHT ZONE

ORIGINAL PAGE IS
OF POOR QUALITY

"SAFE" FLIGHT ZONE

CRITICAL h – v ENVELOPE
AUTO ROTATE NOT POSS

SAFE "DROP" HEIGHT

80SSD10806

Rockwell
International

Space Operations and
Satellite Systems Division

61

DOCKING ABORT SCENARIO

① INITIAL APPROACH
TAIL DOWN
$\Delta V = 0.5$ FPS

② RUNAWAY JET OCCURS AT
+0.5 DEG DEADBAND

③ NEGATIVE
DEADBAND ENCOUNTED....
RECOVERY STARTED
● 2 JET COUPLE, STOP $\dot\theta$
● 3 JET ACTION, $\dot Z$ ABORT
(NET 2 JETS)

$\Delta d = 26.1$ INCHES
$\Delta \theta = $ AT -0.5 DEG
$\Delta \dot\theta = 0.65$ DEG/SEC

④ CLOSING MOTION ARRESTED....
TOTAL DISTANCE, $\Delta d \approx 44.5$ INCHES
MAX ANGLE EXCURSION, $\Delta \theta \approx -0.9$ DEG

Rockwell
International

Space Operations and
Satellite Systems Division

80SSD10807

62

"WORST CASE" PLUME EFFECTS

ASSUMPTIONS:
- PROXIMITY ABORT
- WORST CASE PLUME GEOM
- MAX NUMBER OF THRUSTERS

- SOLAR ARRAY

$A = 28 \times 127 \times \sin 72° \approx 3400 \ FT^2$

$q = 3 \times 10^{-2} \times 2 \ THRUSTERS \approx 6 \times 10^{-2} \ PSF$

$F = 2 \times 6 \times 10^{-2} \times 3400 = 408 \ LB$

CENTER OF PRESSURE

- SOC BODY

$A = 40 \times 14 + \dfrac{14^2}{4} \approx 720 \ FT^2$

$q = 2.5 \times 10^{-1} \times 4 \ THRUSTERS \approx 1 \ PSF$

$F = 2 \times 1.0 \times 720 \approx 1440 \ LB$

- RADIATORS

$A = 4 \times 7.5 \times 23.3 \approx 700 \ FT^2$

$q = 10^{-1} \times 4 \ THRUSTERS \approx 4 \times 10^{-1} \ PSF$

$F = 2 \times 4 \times 10^{-1} \times 700 \approx 560 \ LB$

30 FT

52°

50 FT

$\phi = 20°$

PLUME INDUCED FORCES & MOMENTS	
$\sum F_{PLUME}$	= 2408 LB
$\sum M_{PLUME}$	= 22490 FT LB

OPTIONS FOR DOCKING SAFETY

- DETERMINE IF SPECIAL PROCEDURES CAN SATISFY SAFETY REQ

- IMPROVE SOFTWARE TO REDUCE RUNAWAY JET RESPONSE TIME

- MODIFY VRCS . . . . ADD THRUSTERS TO PROVIDE TRANSLATION CAPABILITY FOR "CLOSE-IN" MANEUVERS

- MODIFY SOC - ORBITER DOCKING PROVISIONS . . . . .
  - EXPAND CONTACT ENVELOPE
  - "ARMOR" TO PROTECT POTENTIAL CONTACT AREAS

- INVESTIGATE THE USE OF RMS/BERTHING INSTEAD OF DIRECT DOCKING . . . . REQUIRES LOOK AT
  - RMS SINGLE POINT FAILURE POTENTIAL & RELATED HAZARDS
  - RUNAWAY JET IMPLICATIONS

REQUIRES MAN-IN-THE-LOOP SIMULATIONS TO VERIFY THE NEED &/OR SOLUTIONS TO DOCKING SAFETY

MAJOR SIMULATION FACILITIES

FACILITY	CAPABILITY	AVAILABILITY	RESP ENGR
JSC	SES – SHUTTLE ENGINEERING SIM HI-FI SYST, REAL TIME RELATIVE MOTION, FLEX ARM RMS VISUAL AIDS	SOC PRIORITY RANK > 15	H. ROSENBERG
	SAIL – SHUTTLE AVION INTEG LAB	} COMMITTED TO STS NO. 1	
	SMS – SHUTTLE MISSION SIM		
ROCKWELL	FSL – FLIGHT SIM LAB HI-FI SYST, REAL TIME VISUAL AIDS – ENTRY, ASCENT RELATIVE MOTION CAPABILITY	COMMITTED TO STS NO. 1	J. DUNGAN
	PDRSS – P/L DEPLOY & RETRIEVAL SYST SIM NON-REAL TIME ORBITER/DAP MOTION, FLEX ARM RMS PROVISIONS FOR FLEX P/L	EST OPERATIONAL NOV 1980	D. BROCKSCHMIDT
SPAR	SIMFAC – SIMULATION FACILITY ORBITER/DAP PROVISIONS FLEX ARM RMS CRT VISUAL AIDS	CURRENTLY AVAIL	B. FULLER
	ENGR SIM NON-REAL TIME FLEX ARM RMS	CURRENTLY AVAIL	B. FULLER

PENDING SPAR/ROCKWELL INTERNATIONAL SIMULATIONS

CURRENTLY HOLDING DISCUSSIONS ON WAYS ROCKWELL INTERNATIONAL & SPAR CAN WORK TOGETHER TOWARD . . . .

✔ CLARIFICATION OF RMS CAPABILITY FOR

    ORBITER/SOC BERTHING

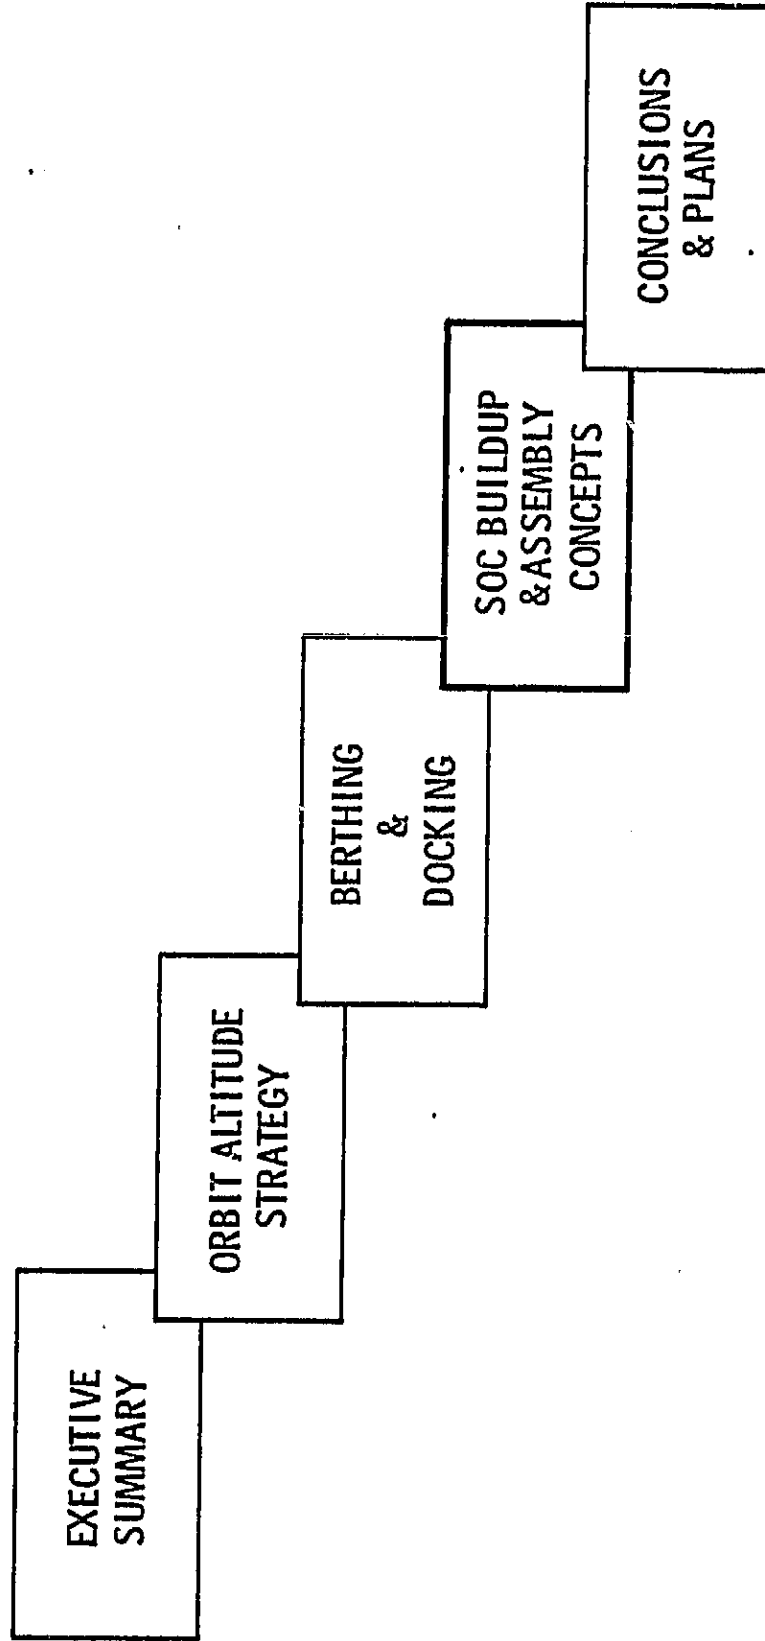✔ GROSS FEASIBILITY EVALUATIONS

    REMOVAL OF RESIDUAL RELATIVE MOTIONS

    POSITIONING OF ORBITER TO SOC BERTHING PORT
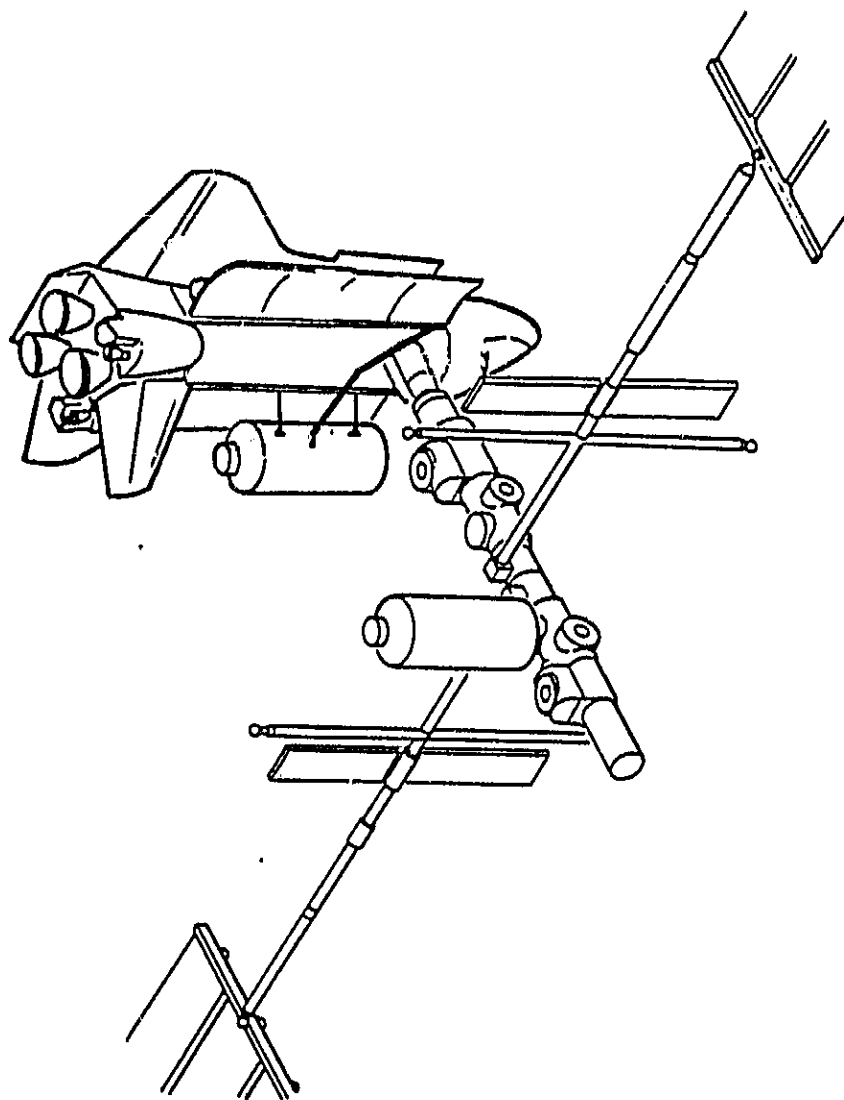
BERTHING AND DOCKING SUMMARY

- A VERSATILE DOCKING MODULE CONCEPT HAS BEEN DEFINED

- BASIC REQUIREMENTS/CRITERIA ESTABLISHED FOR STS/SPACE PROG CONSIDERATION

- ORBITER CAN DOCK WITH SOC . . . . BUT SAFETY ISSUES REQUIRE
  ADDITIONAL EVALUATION

- POTENTIAL SAFETY ISSUE WITH RUNAWAY JET . . . . FURTHER EXCURSION
  ENVELOPE/CORRIDOR BEING DEVELOPED

- THERE ARE SOLUTIONS TO SAFETY ISSUES . . . . MAN-IN-THE-LOOP
  SIMULATIONS ARE NEEDED

- DESIRED "FULL UP" SIMULATION CAPABILITY CURRENTLY UNAVAILABLE FOR
  SOC . . . . LIMITED SIM ANALYSIS PENDING, ROCKWELL INTERNATIONAL/SPAR

- FURTHER DEFINITION OF PLUME EFFECTS PLANNED

- RECOMMEND KEEPING BOTH BERTHING & DOCKING OPTIONS FOR SOC

BRIEFING OUTLINE

EXECUTIVE SUMMARY

ORBIT ALTITUDE STRATEGY

BERTHING & DOCKING

SOC BUILDUP & ASSEMBLY CONCEPTS

CONCLUSIONS & PLANS

80SSD10834

Rockwell International

Space Operations and
Satellite Systems Division

68

SOC ASSEMBLY

SOC SHOULD BE – AND CAN BE – DESIGNED TO ACCOMMODATE
BUILD-UP BY ANY OF SEVERAL SCENARIOS

80SSD10830

Rockwell
International

Space Operations and
Satellite Systems Division

69

POTENTIAL SOC SCENARIOS

This chart illustrates two possible SOC buildup scenarios. The top scenario depicts the basic plan in which the various SOC modules are produced and delivered in the most logical sequence to achieve "full-up" operational capability in the earliest feasible time period.

This plan, which is in accord with NASA guidelines, has been examined in detail to determine the orbiter's capability to deliver and assemble the SOC system.

The second scenario shows one of many possible "evolutionary" build-up options. In this scenario, the orbiter's sortie capability would first be augmented by the power extension package (PEP). For longer more-advanced missions, the initial SOC service and habitability modules would be assembled to provide necessary services and comfortable crew quarters. Eventually, the economic drive to improve the utilization of the Shuttle fleet might lead to the earliest autonomous SOC. In the case shown, the spacelab might be accommodated as a mission module on the early SOC. However, for accommodation aboard SOC, the spacelab mission module would require extensive modifications in the areas of meteoroid protection, heat rejection, hatches, and structure. Other possible mission modules might include payload pallets.

With the delivery of the remaining modules, the SOC's full-up operational capability would be achieved.

POTENTIAL SOC SCENARIOS

ORIGINAL PAGE IS
OF POOR QUALITY

BASIC PLAN

SM 1   SM 2   HM 1   HM 2   RCM & SAM   LM & TUNNEL

EVOLUTIONARY OPTION

ROUTINE SHUTTLE OPERATIONS

POWER SERVICES

EXTENDED SORTIE MISSIONS

SERVICE MODULE HABIT MODULE

MODIFIED SPACELAB MISSION MODULE

TENDED LEO OPERATIONS

EARLY CAPABILITY STATION

SERVICE & HAB MODULES & RCM

SOC

80SSD10895

70

80SSD10821

SOC ASSEMBLY SEQUENCE
BASELINE CONCEPT

① SM-1

② SM-1 SM-2

③ SM-1 HM-1

④ SM-2 HM-2

5A RCM SM-2

5B SAM SM-2

6A SM-1 TM

6B SM-1 LM

BUILDUP EVALUATION TECHNIQUE

One of the tools we used to verify the results of our SOC buildup analysis is a scale model of the orbiter and the various SOC modules. The 1/48 scale model was of a sufficient fidelity to verify all docking/berthing orientations, reach distances and translation paths. The subject of this photographic sequence was a variation to the baseline buildup concept in which the SOC was berthed to a holding and positioning aid as shown in the bottom left photograph.

BUILDUP EVALUATION TECHNIQUE

FEATURES

- THREE DOCKING PORTS USING STANDARD DOCKING INTERFACE

- USE RCM FOR TUNNEL INSTALLATION

- HABITABLE AFTER 6TH FLIGHT

- STANDARD ORBITER WITH DOCKING MODULE, PIDA, AND LIGHTS CAN PERFORM SOC ASSEMBLY

RCM ASSIST TO SOC ASSEMBLY

TIMING OF RCM INSTALLATION
CAN BE SIGNIFICANT TO
SOC BUILD-UP

IMPLICATIONS

- SIMPLIFIES MODULE ASSEMBLY MANEUVERS
- PROVIDES DIRECT VISIBILITY OF OPERATION
- REQUIRES MANNED ENTRY WITH SOC DURING MAJOR ASSEMBLY OPERATIONS

RCM

80SSD10750

Rockwell
International

Space Operations and
Satellite Systems Division

74

ASSEMBLY AIDS

ORIGINAL PAGE IS
OF POOR QUALITY

SOC

FINAL ALIGNMENT

TARGET

CAMERA

GROSS ALIGNMENT

8' - 10'

ORBITER

RMS

LIGHTS

PIDA

SERVICE MODULE

80SSD10856

75

BERTHING ALIGNMENT AIDS

FINAL BERTHING PHASE

- RMS
- £ TV AID
- VIDEO DISPLAYS

TARGET

Q CAMERA

MODULE POSITIONING PHASE

- PIDA
- RMS
- TV
- LIGHTS

GROSS ALIGNMENT MARKS

80SSDI0876

Rockwell
International

Space Operations and
Satellite Systems Division
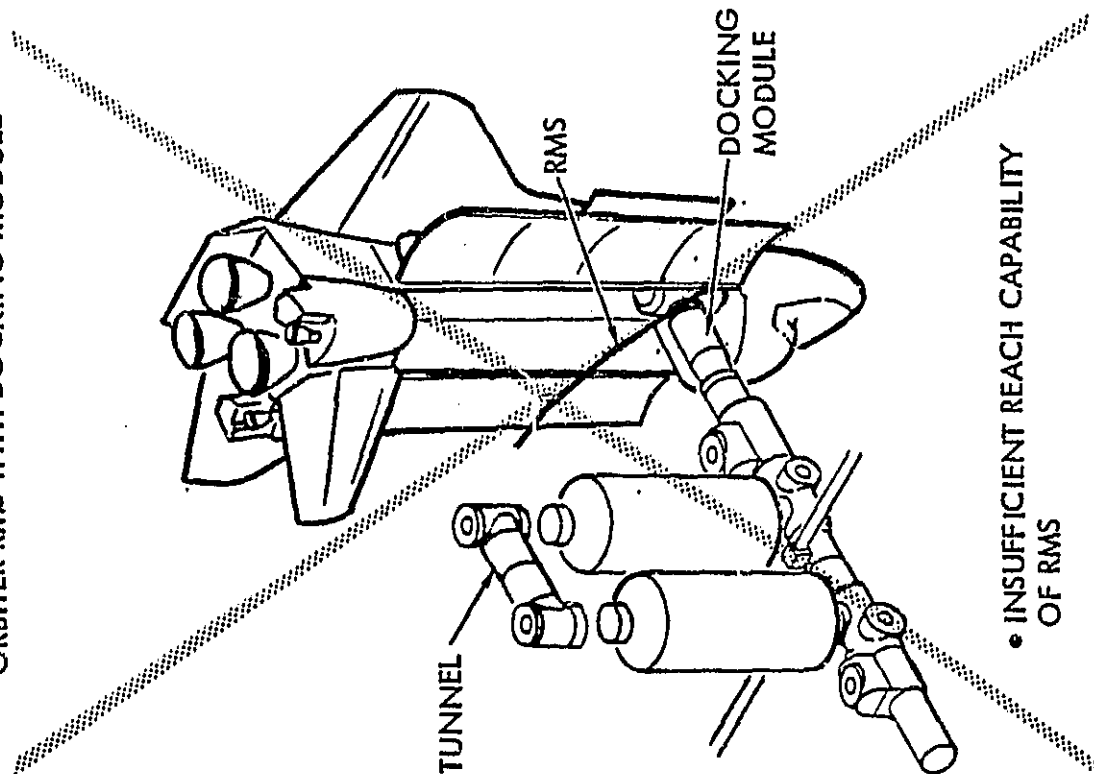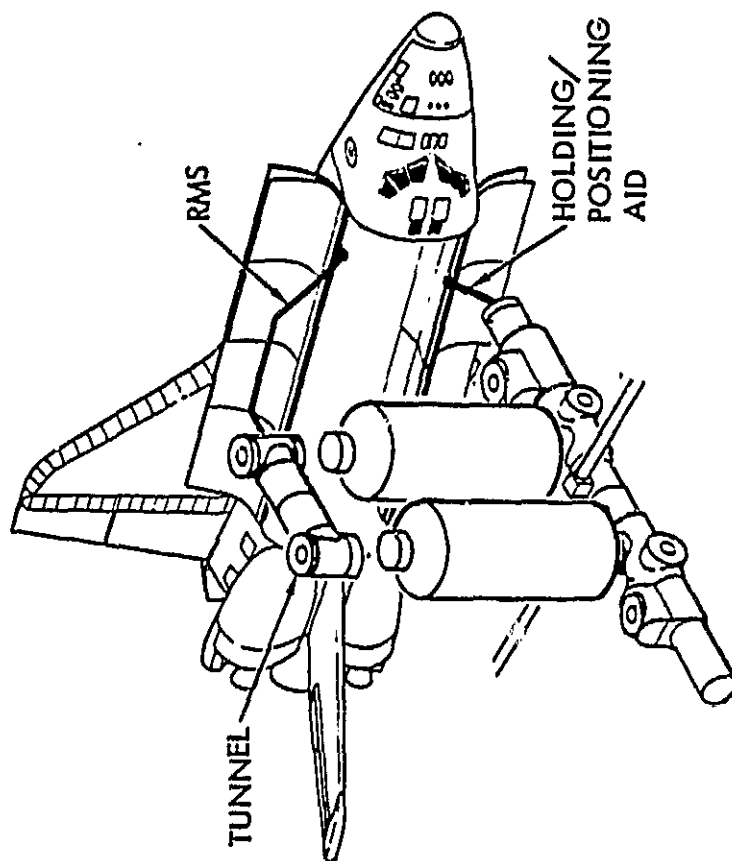
76

RMS TUNNEL INSTALLATION

Another variation to the baseline buildup sequence assumes that the RMS Control Module (RCM) is not available to attach the tunnel – a most difficult operation. If the SOC is docked with the Docking Module, the RMS reach is inadequate for attaching the Tunnel. However, if the SOC was berthed to a holding and positioning aid (HAPA) rather than the Docking Module, then the RMS reach becomes quite adequate for attaching the Tunnel. This capability was also verified by the 1/48 scale model.
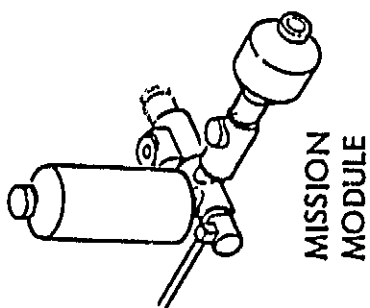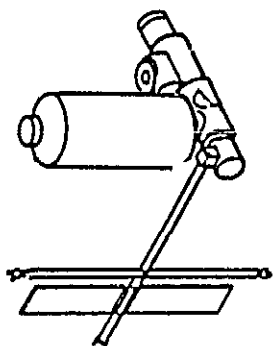
ORIGINAL PAGE IS
OF POOR QUALITY

RMS TUNNEL INSTALLATION

ORBITER RMS WITH HOLDING AND POSITIONING AID

RMS

HOLDING/
POSITIONING
AID

TUNNEL

- WITHIN REACH CAPABILITY
  OF RMS

ORBITER RMS WITH DOCKING MODULE

RMS

DOCKING
MODULE

TUNNEL

- INSUFFICIENT REACH CAPABILITY
  OF RMS

77

EXAMPLE OF AN EVOLUTIONARY BUILD-UP

80SSD10831

MISSION
MODULE

SM #2

HAB MODULE #1

LM
TUNNEL

SORTIE
MISSION

SM I

HAB MODULE #2

78.

ASSEMBLY PROVISIONS ABOARD ORBITER.

80SSD10751

ORBITER PROVISIONS IN DEVELOPMENT
OR PLANNED

RMS

LIGHTS

PIDA

HAPA

Rockwell
International

Space Operations and
Satellite Systems Division

79

ASSEMBLY IMPACTS ON SOC DESIGN

There are several SOC implications which must be considered in order to accommodate all possible buildup modes, basic or evolutionary. Considering the assymetric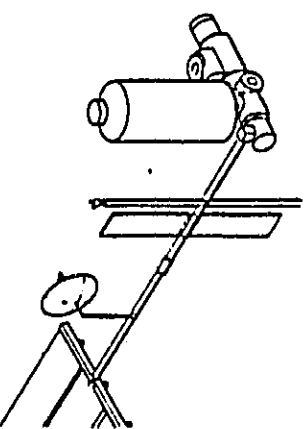 configuration of a fully deployed Service Module, an interim attitude stabilization for safe revisit is required. Similarly, an independent environmental control life support system is required on the habitation module in order to afford maximum flexibility in the buildup sequence. In the event of a buildup sequence that orients the two habitation modules different than the normal operational orientation, then a clocking capability on the tunnel interface could also be required. These features represent few added provisions that must be incorporated into the SOC so it can accommodate all possible buildup modes.

ASSEMBLY IMPACTS ON SOC DESIGN

80SD10838

FEW Δ PROVISIONS REQUIRED OF SOC TO ACCOMMODATE ALL POSSIBLE BUILD-UP MODES

RCM

- NO IMPACT

TUNNEL

- PROVIDE FOR POTENTIAL CLOCKING

HAB. MODULE

- SHOULD HAVE INDEPENDENT ECLSS FOR MAX FLEXIBILITY

SM

- INTERIM ATTITUDE STABILIZATION FOR SAFE REVISIT

Rockwell International

Space Operations and
Satellite Systems Division

80

SUMMARY

- SOC CAN BE DESIGNED TO ACCOMMODATE NOMINAL AND EVOLUTIONARY MODES OF BUILT-UP AND VARIATIONS OF THOSE MODES

- VERY LITTLE Δ PROVISIONS ARE REQUIRED FROM THE ORBITER AND FROM SOC TO ACCOMPLISH ALL POSSIBLE BUILT-UP MODES

- TIMING OF THE RCM INSTALLATION CAN BE SIGNIFICANT TO SOC BUILD-UP

- A HIGH-CONFIDENCE TECHNIQUE FOR THE ASSEMBLY OF SOC MODULES IS PROPOSED

C-2

BRIEFING OUTLINE

EXECUTIVE
SUMMARY

ORBIT ALTITUDE
STRATEGY

BERTHING
&
DOCKING

SOC BUILDUP
&ASSEMBLY
CONCEPTS

CONCLUSIONS
& PLANS

80SSD10834

Space Operations and
Satellite Systems Division

Rockwell
International

82

CONCLUSIONS

- ORBITAL ALTITUDE

  - SOC SHOULD FLY A VARIABLE ALTITUDE STRATEGY

  - STANDARD ORBITER CAN DO THE JOB

- BERTHING AND/OR DOCKING

  - A STANDARDIZED DOCKING MECHANISM AND DOCKING MODULE CONCEPT HAS BEEN DETERMINED AND PRELIMINARY REQUIREMENTS DEFINED

  - STATUS OF THE ORBITER MCR AND OF THE 25 KW POWER SYSTEM PROGRAMS DEMAND EARLY DEFINITION OF THE REQUIREMENTS AND CONCEPT

  - ORBITER HAS ADEQUATE CONTROLLABILITY TO DOCK WITH SOC -- BUT SOLUTIONS MUST BE FOUND FOR RCS FAILURE MODE

- SOC ASSEMBLY

  - SOC SHOULD BE AND CAN BE DESIGNED TO ACCOMMODATE NOMINAL AND EVOLUTIONARY MODES OF BUILD-UP

  - WITH ASSEMBLY AIDS CURRENTLY IN DEVELOPMENT OR PLANNED, ORBITER CAN ACCOMMODATE ANY MODE OF SOC BUILD-UP

PLANNED ACTIVITY

	1980								1981		
	MAY	JUNE	JULY	AUG	SEPT	OCT	NOV	DEC	JAN	FEB	MAR

MILESTONES

△ ATP   △ REVIEW   △ REVIEW   △ REVIEW   △ REVIEW

TASKS

1. ORBITAL ALTITUDE

2. BERTHING AND/OR DOCKING
   - BERTHING ORBITER/SOC ANALYSIS & SIMULATIONS (SPAR, ROCKWELL)
   - ABORT EXCURSION CORRIDOR ANALYSIS
   - PLUME IMPINGEMENT ANALYSIS

3. SOC ASSEMBLY
   - UNTENDED SOC MODULES REQ'TS
   - ASSY SIMULATIONS (SPAR, ROCKWELL)

4. SOC RESUPPLY & FUEL TRANSFER
   - OTHER LOGISTICS OPS ANALYSIS
   - ORBITER CREW TRANSPORT CAPABILITY ANALYSIS
   - FUEL QUANTITY GAGING CONCEPTS
   - LM CHANGEOUT PROCEDURE
   - FUEL TRANSFER CONCEPTS

5. FLIGHT SUPPORT FACILITY
   - SERVICING PHILOSOPHY
   - MOTV SERVICING CONCEPT/ANALYSIS

Space Transportation System
Development & Production Division

Rockwell International

84

80SSD10823